



**SAVE ENERGY
SAVE MONEY
SHINE BRIGHT**



LEDFIXTS CATALOG

RESIDENTIAL, COMMERCIAL, ARCHITECTURAL LED FIXTURES, BOLLARDS & PEDESTRIAN POLES



WHO WE ARE

SO MUCH MORE THAN A MANUFACTURER

LEDFixts is a full-service LED lighting fixture manufacturer, with its own Product Line, specialized in total turnkey design, engineering, tooling, production and logistics.

BY THE NUMBERS

- 750 •** Square Feet of full-service LED Lighting Fixtures, Die-Casting Technology and Green Energy Solutions
- 700 •** Full-time employees worldwide, and counting
- 65 •** Full-time designers, engineers & advanced control research development team
- 30 •** Countries to which we sell and ship goods
- 7 •** North American assembly and distribution centers to serve our customers
- 1 •** Vertically integrated company proven to competitively design, engineer, produce, distribute and finance any products



VERTICALLY INTEGRATED MANUFACTURER

In-house expertise spread among aluminum, steel, plastics, GRPs, glass, finishing, assembly, tooling and state-of-the-art testing & QC. Over a dozen die cast machines with specs surpassing 1200 ton.

In addition, we are specialized in the production of toolings & castings for the automotive, marine and lighting industry.



LED Fixts



WORLD CLASS NEW PRODUCT DEVELOPMENT & DESIGN TEAM

Continuously Designing & Producing High Quality Lighting so we can constantly offer the latest in LED products at unbeatable prices.

Each year, LED technology jumps by leaps and bounds. We ensure that our products utilize the highest technology & performance.

Filled with amazing talented designers and engineers, ranging across multiple background. LEDFixts' team creates completely innovative and highly competitive Green Energy Solutions giving a refreshed leg up on the competition.

FLEXIBLE TERMS

Industry leading financial services

New Product Development "No Upfront Cost"

Creating new products can quickly rack up cost. Let us cover all upfront costs to develop your next product line.

Just-in-time (JIT)

Your products are stored in LEDFixts' owned warehouses and are shipped within 24 hours of order placement (Consignment) and only then an invoice is generated for items released. We hold your goods for six (6) months so you can keep your cash free

Vendor Management Inventory (VMI)

There are some hidden costs associated with proper inventory control, and even more if it is not readily available in stock. With our VMI's program, we offer our customers means of optimizing supply chain performance, where we are responsible for maintaining inventory levels at your requirements.

Need something special

Tell us your challenges and goals and let us come up with special programs to meet them. Our goal is simple: help you grow and succeed, let us work for you!

Common terms

LC at sight, LC 30/60/90 days from invoice or payment after 30/60/90 days of invoice receipt date

WALLPACKS

HAWKEYE

LED WALLPACK
14W | 2035 LUMENS | REPLACES 70W

ORDER NUMBER: **L-HA14-4UD-P-Z**



KEY BENEFITS

UL wet listed die-cast aluminum construction with tempered flat glass lens complete with stainless steel hardware. Mounts to standard 4 inch square electrical junction boxes. Alternate junction box mounting possible via universal mounting ring. Ingress resistant gasket included.

- 90 degree adjustability of beam angle with full cut-off optics
- Citizen® COB LED's and YG® driver technology
- Dimming option available
- Precision die cast
- Wall, post, or bollard mount
- IP65 rated fixture for outdoor use
- Chip and fade resistant powder coat finish in any color
- Highly specular forward throw reflector
- Industrial grade, Button-type photocell
- Easy installation with hands free mounting
- Dark sky compliant mounting.

APPLICATIONS

Ideal for driveways adjacent to buildings and outside warehousing



CERTIFICATIONS

• DLC 4.1 Premium • cUL-us Listed



* Please refer to the DLC QPL website for the latest and most complete info www.designlights.org/QPL


PRODUCT PERFORMANCE

SYSTEM WATTAGE	LED WATTAGE	LUMENS	LP/W	CRI	REPLACES (MH)
14W	13W	2035 lm	145 lm/w	≥80	70W

PRODUCT SUMMARY


EFFICACY	>145 lm/w
LED CHIP	Citizen COB LED's
CCT	4000K
DRIVER	Dimmable LED power supplies, Current can be adjusted The 0-10V Dimming type is continuous, The product can dim to 10%
DRIVER EFFICIENCY	>85%
DIMENSIONS	7.21in x 6.22in x 4.20in
WEIGHT	5.07 lbs
STANDARD LIFETIME	Design minimum 75,000 hours
STANDARD WARRANTY	5 Years
WATER PROOFING GRADE	IP65

PRODUCT DIMENSIONS

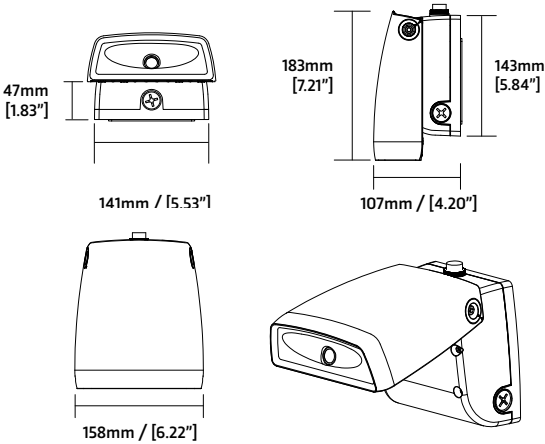

PRODUCT PHOTOMETRY

MOUNTED AT 10ft.

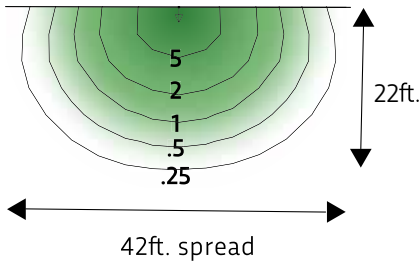

PRODUCT SPECIFICATIONS & VARIATIONS

BODY TYPE	SYSTEM WATTS	CCT	VOLTS	DIMMING OPTIONS	ELECTRICAL PHOTOCELL	HOUSING FINISH
HA	14	4	U	D	P	Z
L-HA Hawkeye	14 = 14W	4 = 4000k	U = 120-277V	D = Dimming	P = Photocell N = None	Z = Bronze V = Silver B = Black W = White G = Grey

HAWKEYE

LED WALLPACK
20W | 2838 LUMENS | REPLACES 70W

ORDER NUMBER: **L-HA20-DZ4**



KEY BENEFITS

UL wet listed die-cast aluminum construction with tempered flat glass lens complete with stainless steel hardware. Mounts to standard 4 inch square electrical junction boxes. Alternate junction box mounting possible via universal mounting ring. Ingress resistant gasket included.

- 90 degree adjustability of beam angle with full cut-off optics
- Citizen® COB LED's and YG® driver technology
- Dimming option available
- Precision die cast
- Wall, post, or bollard mount
- IP65 rated fixture for outdoor use
- Chip and fade resistant powder coat finish in any color
- Highly specular forward throw reflector
- Industrial grade, Button-type photocell
- Easy installation with hands free mounting
- Dark sky compliant mounting.

APPLICATIONS

Ideal for driveways adjacent to buildings and outside warehousing



CERTIFICATIONS

• DLC 4.1 Premium • cUL-us Listed



* Please refer to the DLC QPL website for the latest and most complete info www.designlights.org/QPL


PRODUCT PERFORMANCE

SYSTEM WATTAGE	LED WATTAGE	LUMENS	LP/W	CRI	REPLACES (MH)
20W	18W	2838 lm	141 lm/w	≥80	70W

PRODUCT SUMMARY


EFFICACY	>141 lm/w
LED CHIP	Citizen COB LED's
CCT	4000K
DRIVER	Dimmable LED power supplies, Current can be adjusted The 0-10V Dimming type is continuous, The product can dim to 10%
DRIVER EFFICIENCY	>85%
DIMENSIONS	7.21in x 6.22in x 4.20in
WEIGHT	5.07 lbs
STANDARD LIFETIME	Design minimum 75,000 hours
STANDARD WARRANTY	5 Years
WATER PROOFING GRADE	IP65

PRODUCT DIMENSIONS

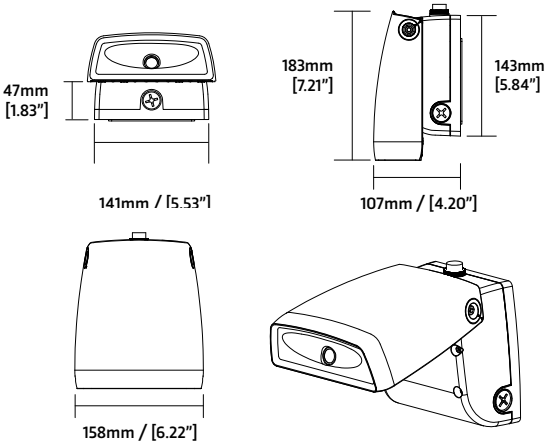

PRODUCT PHOTOMETRY

MOUNTED AT 12ft.

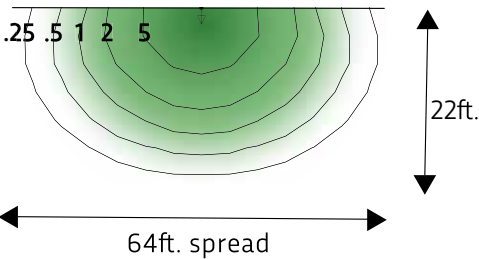

PRODUCT SPECIFICATIONS & VARIATIONS

BODY TYPE	SYSTEM WATTS	CCT	VOLTS	DIMMING OPTIONS	ELECTRICAL PHOTOCELL	HOUSING FINISH
HA	20	4	U	D	P	Z
L-HA	20 = 20W	4 = 4000k	U = 120-277V	D = Dimming	P = Photocell N = None	Z = Bronze V = Silver B = Black W = White G = Grey

HAWKEYE

LED WALLPACK
26W | 3566 LUMENS | REPLACES 100W

ORDER NUMBER: **L-HA26-DZ4**



KEY BENEFITS

UL wet listed die-cast aluminum construction with tempered flat glass lens complete with stainless steel hardware. Mounts to standard 4 inch square electrical junction boxes. Alternate junction box mounting possible via universal mounting ring. Ingress resistant gasket included.

- 90 degree adjustability of beam angle with full cut-off optics
- Citizen® COB LED's and YG® driver technology
- Dimming option available
- Precision die cast
- Wall, post, or bollard mount
- IP65 rated fixture for outdoor use
- Chip and fade resistant powder coat finish in any color
- Highly specular forward throw reflector
- Industrial grade, Button-type photocell
- Easy installation with hands free mounting
- Dark sky compliant mounting.

APPLICATIONS

Ideal for driveways adjacent to buildings and outside warehousing



CERTIFICATIONS

• DLC 4.1 Premium • cUL-us Listed



* Please refer to the DLC QPL website for the latest and most complete info www.designlights.org/QPL


PRODUCT PERFORMANCE

SYSTEM WATTAGE	LED WATTAGE	LUMENS	LP/W	CRI	REPLACES (MH)
26W	25W	3566 lm	127 lm/w	≥80	100W


PRODUCT SUMMARY

EFFICACY	>127 lm/w
LED CHIP	Citizen COB LED's
CCT	4000K
DRIVER	Dimmable LED power supplies, Current can be adjusted The 0-10V Dimming type is continuous, The product can dim to 10%
DRIVER EFFICIENCY	>85%
DIMENSIONS	7.21in x 6.22in x 4.20in
WEIGHT	5.07 lbs
STANDARD LIFETIME	Design minimum 75,000 hours
STANDARD WARRANTY	5 Years
WATER PROOFING GRADE	IP65

PRODUCT DIMENSIONS

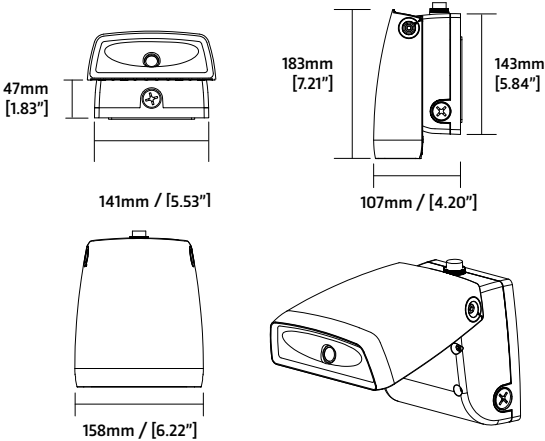

PRODUCT PHOTOMETRY

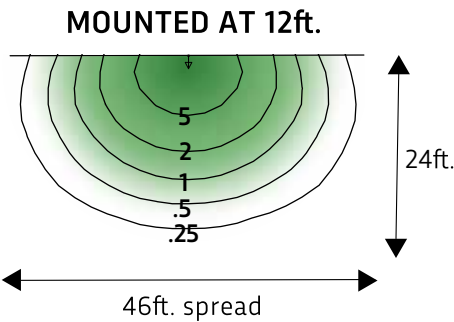

PRODUCT SPECIFICATIONS & VARIATIONS

BODY TYPE	SYSTEM WATTS	CCT	VOLTS	DIMMING OPTIONS	ELECTRICAL PHOTOCELL	HOUSING FINISH
HA	26	4	U	D	P	Z
L-HA	26 = 26W	4 = 4000k	U = 120-277V	D = Dimming	P = Photocell N = None	Z = Bronze V = Silver B = Black W = White G = Grey

HAWKEYE

LED WALLPACK
40W | 5373 LUMENS | REPLACES 150W

ORDER NUMBER: **L-HA40-4UD-P-Z**



KEY BENEFITS

UL wet listed die-cast aluminum construction with tempered flat glass lens complete with stainless steel hardware. Mounts to standard 4 inch square electrical junction boxes. Alternate junction box mounting possible via universal mounting ring. Ingress resistant gasket included.

- 90 degree adjustability of beam angle with full cut-off optics
- Citizen® COB LED's and YG® driver technology
- Dimming option available
- Precision die cast
- Wall, post, or bollard mount
- IP65 rated fixture for outdoor use
- Chip and fade resistant powder coat finish in any color
- Highly specular forward throw reflector
- Industrial grade, Button-type photocell
- Easy installation with hands free mounting
- Dark sky compliant mounting.

APPLICATIONS

Ideal for driveways adjacent to buildings and outside warehousing

CERTIFICATIONS

• DLC 4.1 Premium • cUL-us Listed



* Please refer to the DLC QPL website for the latest and most complete info www.designlights.org/QPL


PRODUCT PERFORMANCE

SYSTEM WATTAGE	LED WATTAGE	LUMENS	LP/W	CRI	REPLACES (MH)
40W	36W	5373 lm	131 lm/w	≥70	150W


PRODUCT SUMMARY

EFFICACY	>131 lm/w
LED CHIP	Citizen COB LED's
CCT	4000K
DRIVER	Dimmable LED power supplies, Current can be adjusted The 0-10V Dimming type is continuous, The product can dim to 10%
DRIVER EFFICIENCY	>85%
DIMENSIONS	11.81 x 11.69 x 5.47
WEIGHT	14.33 lbs
STANDARD LIFETIME	Design minimum 75,000 hours
STANDARD WARRANTY	5 Years
WATER PROOFING GRADE	IP65

PRODUCT DIMENSIONS

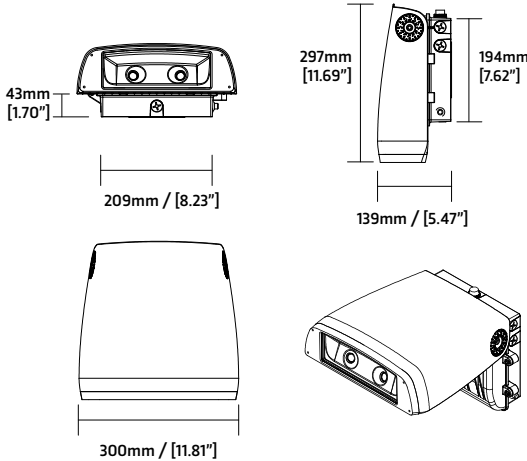

PRODUCT PHOTOMETRY

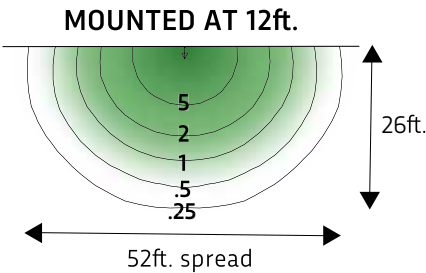

PRODUCT SPECIFICATIONS & VARIATIONS

BODY TYPE	SYSTEM WATTS	CCT	VOLTS	DIMMING OPTIONS	ELECTRICAL PHOTOCELL	HOUSING FINISH
HA	40	4	U	D	P	Z
L-HA	40 = 40W	4 = 4000k	U = 120-277V	D = Dimming	P = Photocell N = None	Z = Bronze V = Silver B = Black W = White G = Grey

HAWKEYE

LED WALLPACK
50W | 6487 LUMENS | REPLACES 200W

ORDER NUMBER: **L-HA50-4UD-P-Z**



KEY BENEFITS

UL wet listed die-cast aluminum construction with tempered flat glass lens complete with stainless steel hardware. Mounts to standard 4 inch square electrical junction boxes. Alternate junction box mounting possible via universal mounting ring. Ingress resistant gasket included.

- 90 degree adjustability of beam angle with full cut-off optics
- Citizen® COB LED's and YG® driver technology
- Dimming option available
- Precision die cast
- Wall, post, or bollard mount
- IP65 rated fixture for outdoor use
- Chip and fade resistant powder coat finish in any color
- Highly specular forward throw reflector
- Industrial grade, Button-type photocell
- Easy installation with hands free mounting
- Dark sky compliant mounting.

APPLICATIONS

Ideal for driveways adjacent to buildings and outside warehousing

CERTIFICATIONS

• DLC 4.1 Premium • cUL-us Listed



* Please refer to the DLC QPL website for the latest and most complete info www.designlights.org/QPL


PRODUCT PERFORMANCE

SYSTEM WATTAGE	LED WATTAGE	LUMENS	LP/W	CRI	REPLACES (MH)
50W	45W	6487 lm	116 lm/w	≥70	200W


PRODUCT SUMMARY

EFFICACY	>116 lm/w
LED CHIP	Citizen COB LED's
CCT	4000K
DRIVER	Dimmable LED power supplies, Current can be adjusted The 0-10V Dimming type is continuous, The product can dim to 10%
DRIVER EFFICIENCY	>85%
DIMENSIONS	11.81 x 11.69 x 5.47
WEIGHT	14.33 lbs
STANDARD LIFETIME	Design minimum 75,000 hours
STANDARD WARRANTY	5 Years
WATER PROOFING GRADE	IP65

PRODUCT DIMENSIONS

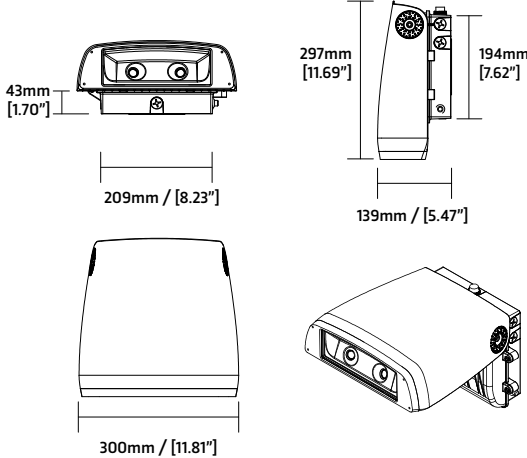

PRODUCT PHOTOMETRY

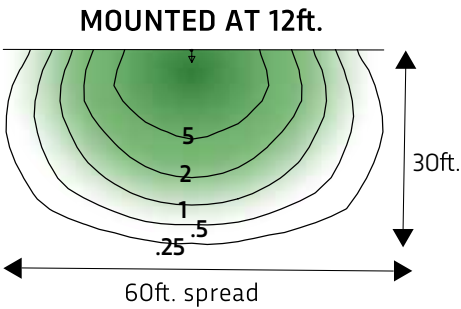

PRODUCT SPECIFICATIONS & VARIATIONS

BODY TYPE	SYSTEM WATTS	CCT	VOLTS	DIMMING OPTIONS	ELECTRICAL PHOTOCELL	HOUSING FINISH
HA	78	4	U	D	P	Z
L-HA	78 = 78W	4 = 4000k	U = 120-277V	D = Dimming	P = Photocell N = None	Z = Bronze V = Silver B = Black W = White G = Grey



HAWKEYE

LED WALLPACK
78W | 9240 LUMENS | REPLACES 250W

ORDER NUMBER: **L-HA78-DZ4**



KEY BENEFITS

UL wet listed die-cast aluminum construction with tempered flat glass lens complete with stainless steel hardware. Mounts to standard 4 inch square electrical junction boxes. Alternate junction box mounting possible via universal mounting ring. Ingress resistant gasket included.

- 90 degree adjustability of beam angle with full cut-off optics
- Citizen® COB LED's and YG® driver technology
- Dimming option available
- Precision die cast
- Wall, post, or bollard mount
- IP65 rated fixture for outdoor use
- Chip and fade resistant powder coat finish in any color
- Highly specular forward throw reflector
- Industrial grade, Button-type photocell
- Easy installation with hands free mounting
- Dark sky compliant mounting.

APPLICATIONS

Ideal for driveways adjacent to buildings and outside warehousing

CERTIFICATIONS

• DLC 4.1 Premium • cUL-us Listed



* Please refer to the DLC QPL website for the latest and most complete info www.designlights.org/QPL


PRODUCT PERFORMANCE

SYSTEM WATTAGE	LED WATTAGE	LUMENS	LP/W	CRI	REPLACES (MH)
78W	68W	9240 lm	121 lm/w	≥70	250W

PRODUCT SUMMARY


EFFICACY	>121 lm/w
LED CHIP	Citizen COB LED's
CCT	4000K
DRIVER	Dimmable LED power supplies, Current can be adjusted The 0-10V Dimming type is continuous, The product can dim to 10%
DRIVER EFFICIENCY	>85%
DIMENSIONS	11.81 x 11.69 x 5.47
WEIGHT	14.33 lbs
STANDARD LIFETIME	Design minimum 75,000 hours
STANDARD WARRANTY	5 Years
WATER PROOFING GRADE	IP65

PRODUCT DIMENSIONS

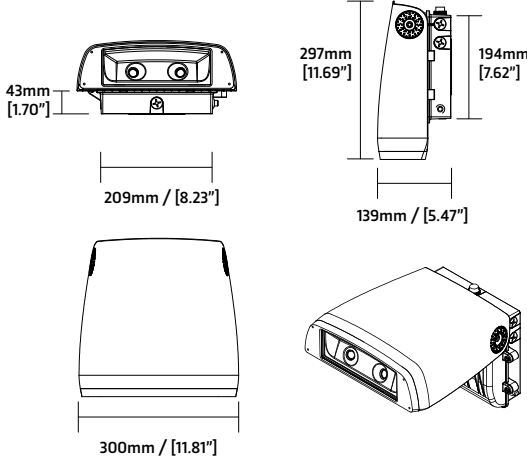

PRODUCT PHOTOMETRY

MOUNTED AT 15ft.

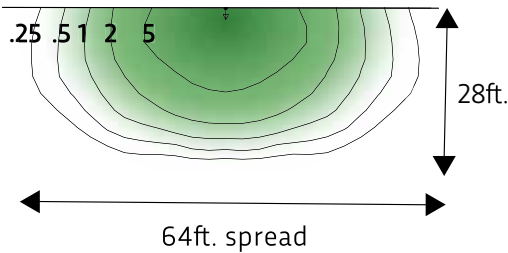

PRODUCT SPECIFICATIONS & VARIATIONS

BODY TYPE	SYSTEM WATTS	CCT	VOLTS	DIMMING OPTIONS	ELECTRICAL PHOTOCELL	HOUSING FINISH
HA	78	4	U	D	P	Z
L-HA	78 = 78W	4 = 4000k	U = 120-277V	D = Dimming	P = Photocell N = None	Z = Bronze V = Silver B = Black W = White G = Grey

HAWKEYE

LED WALLPACK
100W | 12694 LUMENS | REPLACES 320W

ORDER NUMBER: **L-HA100-4UD-P-Z**



KEY BENEFITS

UL wet listed die-cast aluminum construction with tempered flat glass lens complete with stainless steel hardware. Mounts to standard 4 inch square electrical junction boxes. Alternate junction box mounting possible via universal mounting ring. Ingress resistant gasket included.

- 90 degree adjustability of beam angle with full cut-off optics
- Citizen® COB LED's and YG® driver technology
- Dimming option available
- Precision die cast
- Wall, post, or bollard mount
- IP65 rated fixture for outdoor use
- Chip and fade resistant powder coat finish in any color
- Highly specular forward throw reflector
- Industrial grade, Button-type photocell
- Easy installation with hands free mounting
- Dark sky compliant mounting.

APPLICATIONS

Ideal for driveways adjacent to buildings and outside warehousing

CERTIFICATIONS

• DLC 4.1 Premium • cUL-us Listed



* Please refer to the DLC QPL website for the latest and most complete information at www.designlights.org/QPL


PRODUCT PERFORMANCE

SYSTEM WATTAGE	LED WATTAGE	LUMENS	LP/W	CRI	REPLACES (MH)
100W	90W	12694 lm	123 lm/w	≥70	320W

PRODUCT SUMMARY


EFFICACY	>123 lm/w
LED CHIP	Citizen COB LED's
CCT	4000K
DRIVER	Dimmable LED power supplies, Current can be adjusted The 0-10V Dimming type is continuous, The product can dim to 10%
DRIVER EFFICIENCY	>85%
DIMENSIONS	14.84 x 13.78 x 6.89
WEIGHT	19.8 lbs
STANDARD LIFETIME	Design minimum 75,000 hours
STANDARD WARRANTY	5 Years
WATER PROOFING GRADE	IP65

PRODUCT DIMENSIONS

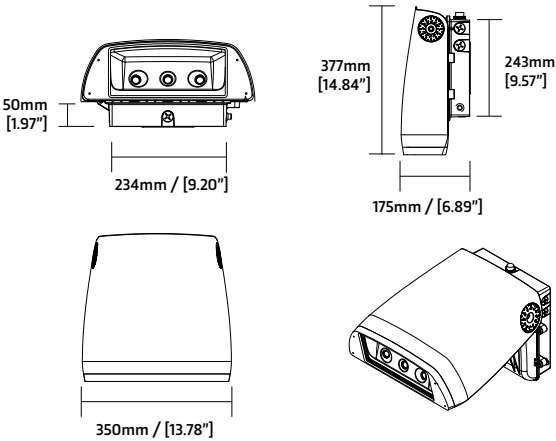

PRODUCT PHOTOMETRY

MOUNTED AT 15ft.

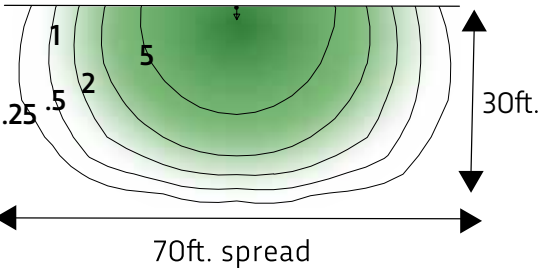

PRODUCT SPECIFICATIONS & VARIATIONS

BODY TYPE	SYSTEM WATTS	CCT	VOLTS	DIMMING OPTIONS	ELECTRICAL PHOTOCELL	HOUSING FINISH
HA	100	4	U	D	P	Z
L-HA	100 = 100W	4 = 4000k	U = 120-277V	D = Dimming	P = Photocell N = None	Z = Bronze V = Silver B = Black W = White G = Grey

HAWK HART

LED WALLPACK
10W | 1110 LUMENS | REPLACES 50W

ORDER NUMBER: **L-HH10-4UD-P-Z**



KEY BENEFITS

UL wet listed die-cast aluminum construction with UV stabilized polycarbonate lens complete with stainless steel hardware. Mounts to standard 4 inch square electrical junction boxes. Alternate junction box mounting possible via universal mounting ring. Ingress resistant gasket included.

- Economic grade architectural wall pack
- Mid-power LED chips and YG® driver technology
- Dimming option available
- Precision die cast
- Easy wall mount installation
- IP65 rated fixture for outdoor use
- Chip and fade resistant powder coat finish in any color
- Forward throw reflector
- Industrial grade, Button-type photocell
- Dark sky compliant mounting

APPLICATIONS

Ideal for driveways adjacent to buildings and outside warehousing



CERTIFICATIONS

• DLC 4.1 Premium • cUL-us Listed



* Please refer to the DLC QPL website for the latest and most complete information at www.designlights.org/QPL


PRODUCT PERFORMANCE

SYSTEM WATTAGE	LED WATTAGE	LUMENS	LP/W	CRI	REPLACES (MH)
10W	9W	1110 lm	107 lm/w	≥80	50W


PRODUCT SUMMARY

EFFICACY	>107 lm/w
LED CHIP	Mid-power
CCT	4000K
DRIVER	Dimmable LED power supplies, Current can be adjusted The 0-10V Dimming type is continuous, The product can dim to 10%
DRIVER EFFICIENCY	>85%
DIMENSIONS	6.66 x 5.63 x 3.18
WEIGHT	2.30 lbs
STANDARD LIFETIME	Design minimum 75,000 hours
STANDARD WARRANTY	5 Years
WATER PROOFING GRADE	IP65

PRODUCT DIMENSIONS

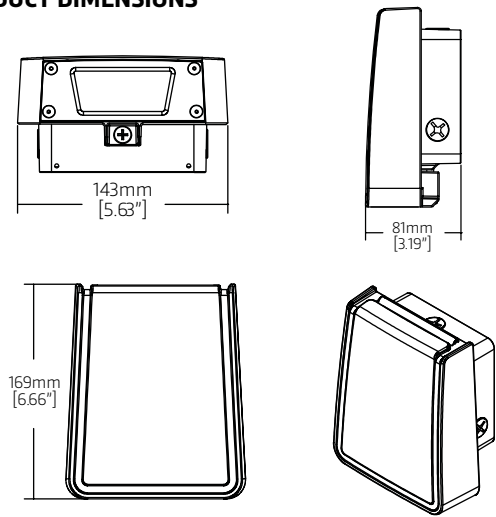

PRODUCT PHOTOMETRY

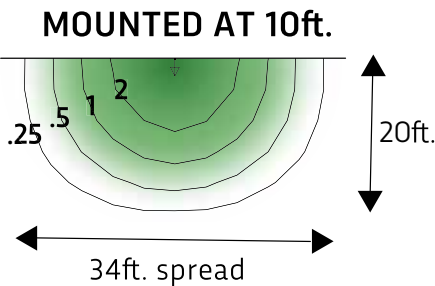

PRODUCT SPECIFICATIONS & VARIATIONS

BODY TYPE	SYSTEM WATTS	CCT	VOLTS	DIMMING OPTIONS	ELECTRICAL PHOTOCELL	HOUSING FINISH
HH	10	4	U	D	P	Z
L-HH	10 = 10W	4 = 4000k	U = 120-277V	D = Dimming	P = Photocell N = None	Z = Bronze V = Silver B = Black W = White G = Grey



HAWK HART



LED WALLPACK
15W | 1646 LUMENS | REPLACES 70W

ORDER NUMBER: **L-HH15-WWU-DZ4**

KEY BENEFITS

UL wet listed die-cast aluminum construction with UV stabilized polycarbonate lens complete with stainless steel hardware. Mounts to standard 4 inch square electrical junction boxes. Alternate junction box mounting possible via universal mounting ring. Ingress resistant gasket included.

- Economic grade architectural wall pack
- Mid-power LED chips and YG® driver technology
- Dimming option available
- Precision die cast
- Easy wall mount installation
- IP65 rated fixture for outdoor use
- Chip and fade resistant powder coat finish in any color
- Forward throw reflector
- Industrial grade, Button-type photocell
- Dark sky compliant mounting

APPLICATIONS

Ideal for driveways adjacent to buildings and outside warehousing



CERTIFICATIONS

• DLC 4.1 Premium • cUL-us Listed



* Please refer to the DLC QPL website for the latest and most complete information at www.designlights.org/QPL


PRODUCT PERFORMANCE

SYSTEM WATTAGE	LED WATTAGE	LUMENS	LP/W	CRI	REPLACES (MH)
15W	14W	1646 lm	110 lm/w	≥80	70W


PRODUCT SUMMARY

EFFICACY	>110 lm/w
LED CHIP	Mid-power
CCT	4000K
DRIVER	Dimmable LED power supplies, Current can be adjusted The 0-10V Dimming type is continuous, The product can dim to 10%
DRIVER EFFICIENCY	>85%
DIMENSIONS	6.66 x 5.63 x 3.18
WEIGHT	2.30 lbs
STANDARD LIFETIME	Design minimum 75,000 hours
STANDARD WARRANTY	5 Years
WATER PROOFING GRADE	IP65

PRODUCT DIMENSIONS

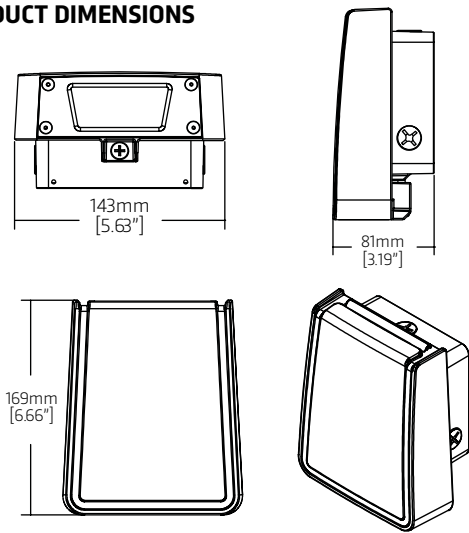

PRODUCT PHOTOMETRY

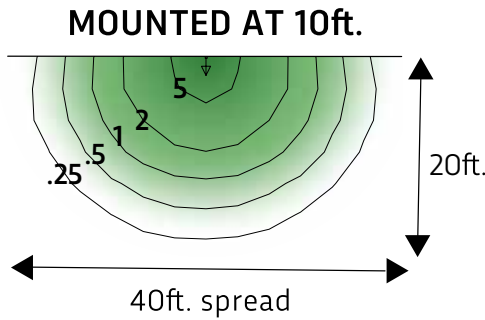

PRODUCT SPECIFICATIONS & VARIATIONS

BODY TYPE	SYSTEM WATTS	CCT	VOLTS	DIMMING OPTIONS	ELECTRICAL PHOTOCELL	HOUSING FINISH
HH	15	4	U	D	P	Z
L-HH	15 = 15W	4 = 4000k	U = 120-277V	D = Dimming	P = Photocell N = None	Z = Bronze V = Silver B = Black W = White G = Grey



HAWK HART

LED WALLPACK
20W | 2105 LUMENS | REPLACES 70W

ORDER NUMBER: **L-HH20-4UD-P-Z**



KEY BENEFITS

UL wet listed die-cast aluminum construction with UV stabilized polycarbonate lens complete with stainless steel hardware. Mounts to standard 4 inch square electrical junction boxes. Alternate junction box mounting possible via universal mounting ring. Ingress resistant gasket included.

- Economic grade architectural wall pack
- Mid-power LED chips and YG® driver technology
- Dimming option available
- Precision die cast
- Easy wall mount installation
- IP65 rated fixture for outdoor use
- Chip and fade resistant powder coat finish in any color
- Forward throw reflector
- Industrial grade, Button-type photocell
- Dark sky compliant mounting

APPLICATIONS

Ideal for driveways adjacent to buildings and outside warehousing



CERTIFICATIONS

• DLC 4.1 Premium • cUL-us Listed



* Please refer to the DLC QPL website for the latest and most complete information at www.designlights.org/QPL


PRODUCT PERFORMANCE

SYSTEM WATTAGE	LED WATTAGE	LUMENS	LP/W	CRI	REPLACES (MH)
20W	18W	2105 lm	108 lm/w	≥80	70W


PRODUCT SUMMARY

EFFICACY	>108 lm/w
LED CHIP	Mid-power
CCT	4000K
DRIVER	Dimmable LED power supplies, Current can be adjusted The 0-10V Dimming type is continuous, The product can dim to 10%
DRIVER EFFICIENCY	>85%
DIMENSIONS	6.66 x 5.63 x 3.18
WEIGHT	2.30 lbs
STANDARD LIFETIME	Design minimum 75,000 hours
STANDARD WARRANTY	5 Years
WATER PROOFING GRADE	IP65

PRODUCT DIMENSIONS

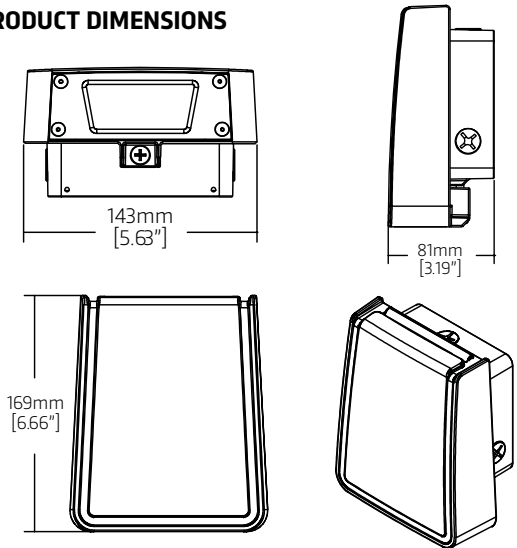

PRODUCT PHOTOMETRY

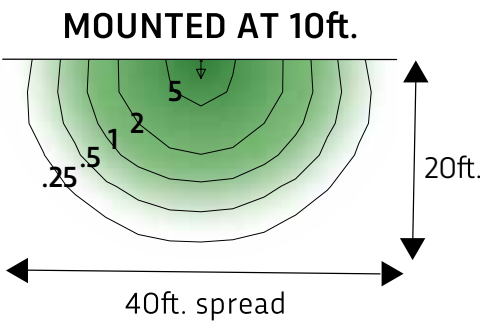

PRODUCT SPECIFICATIONS & VARIATIONS

BODY TYPE	SYSTEM WATTS	CCT	VOLTS	DIMMING OPTIONS	ELECTRICAL PHOTOCELL	HOUSING FINISH
HH	20	4	U	D	P	Z
L-HH	20 = 20W	4 = 4000k	U = 120-277V	D = Dimming	P = Photocell N = None	Z = Bronze V = Silver B = Black W = White G = Grey



HAWK HART



LED WALLPACK
30W | 3174 LUMENS | REPLACES 100W

ORDER NUMBER: **L-HH30-WWU-DZ4**



KEY BENEFITS

UL wet listed die-cast aluminum construction with UV stabilized polycarbonate lens complete with stainless steel hardware. Mounts to standard 4 inch square electrical junction boxes. Alternate junction box mounting possible via universal mounting ring. Ingress resistant gasket included.

- Economic grade architectural wall pack
- Mid-power LED chips and YG® driver technology
- Dimming option available
- Precision die cast
- Easy wall mount installation
- IP65 rated fixture for outdoor use
- Chip and fade resistant powder coat finish in any color
- Forward throw reflector
- Industrial grade, Button-type photocell
- Dark sky compliant mounting

APPLICATIONS

Ideal for driveways adjacent to buildings and outside warehousing



CERTIFICATIONS

• DLC 4.1 Premium • cUL-us Listed



* Please refer to the DLC QPL website for the latest and most complete information at www.designlights.org/QPL


PRODUCT PERFORMANCE

SYSTEM WATTAGE	LED WATTAGE	LUMENS	LP/W	CRI	REPLACES (MH)
30W	27W	3174 lm	103 lm/w	≥80	100W

PRODUCT SUMMARY


EFFICACY	>103 lm/w
LED CHIP	Mid-power
CCT	4000K
DRIVER	Dimmable LED power supplies, Current can be adjusted The 0-10V Dimming type is continuous, The product can dim to 10%
DRIVER EFFICIENCY	>85%
DIMENSIONS	9.86 x 6.49 x 3.19
WEIGHT	2.85 lbs
STANDARD LIFETIME	Design minimum 75,000 hours
STANDARD WARRANTY	5 Years
WATER PROOFING GRADE	IP65

PRODUCT DIMENSIONS

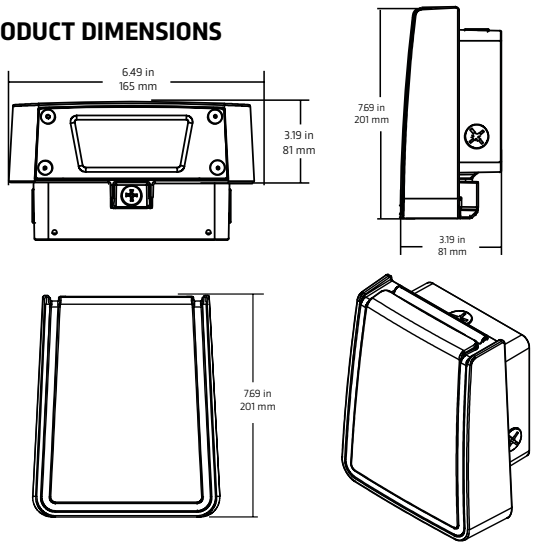

PRODUCT PHOTOMETRY

MOUNTED AT 10ft.

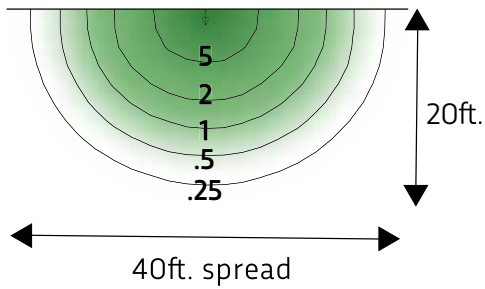

PRODUCT SPECIFICATIONS & VARIATIONS

BODY TYPE	SYSTEM WATTS	CCT	VOLTS	DIMMING OPTIONS	ELECTRICAL PHOTOCELL	HOUSING FINISH
HH	30	4	U	D	P	Z
L-HH	30 = 30W	4 = 4000k	U = 120-277V	D = Dimming	P = Photocell N = None	Z = Bronze V = Silver B = Black W = White G = Grey



HAWK HART

LED WALLPACK
40W | 4081 LUMENS | REPLACES 150W

ORDER NUMBER: L-HH40-4UD-P-Z



KEY BENEFITS

UL wet listed die-cast aluminum construction with UV stabilized polycarbonate lens complete with stainless steel hardware. Mounts to standard 4 inch square electrical junction boxes. Alternate junction box mounting possible via universal mounting ring. Ingress resistant gasket included.

- Economic grade architectural wall pack
- Mid-power LED chips and YG® driver technology
- Dimming option available
- Precision die cast
- Easy wall mount installation
- IP65 rated fixture for outdoor use
- Chip and fade resistant powder coat finish in any color
- Forward throw reflector
- Industrial grade, Button-type photocell
- Dark sky compliant mounting

APPLICATIONS

Ideal for driveways adjacent to buildings and outside warehousing

CERTIFICATIONS

• DLC 4.1 Premium • cUL-us Listed



* Please refer to the DLC QPL website for the latest and most complete information at www.designlights.org/QPL


PRODUCT PERFORMANCE

SYSTEM WATTAGE	LED WATTAGE	LUMENS	LP/W	CRI	REPLACES (MH)
40W	36W	4081 lm	105 lm/w	≥80	150W


PRODUCT SUMMARY

EFFICACY	>105 lm/w
LED CHIP	Mid-power
CCT	4000K
DRIVER	Dimmable LED power supplies, Current can be adjusted The 0-10V Dimming type is continuous, The product can dim to 10%
DRIVER EFFICIENCY	>85%
DIMENSIONS	10.22 x 7.80 x 5.02
WEIGHT	5.25 lbs
STANDARD LIFETIME	Design minimum 75,000 hours
STANDARD WARRANTY	5 Years
WATER PROOFING GRADE	IP65

PRODUCT DIMENSIONS

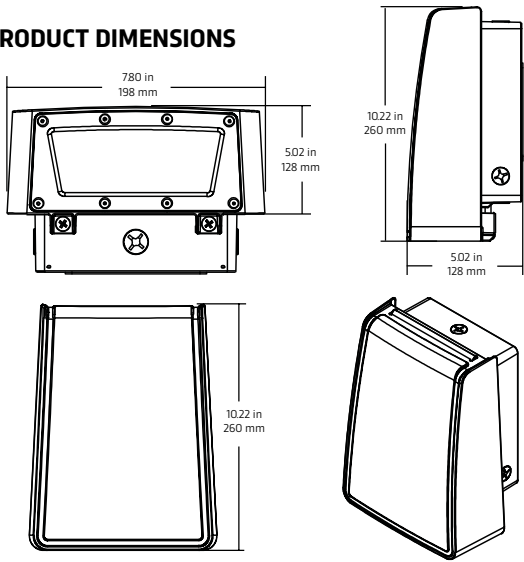

PRODUCT PHOTOMETRY

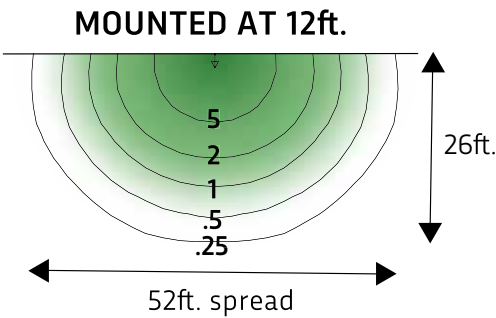

PRODUCT SPECIFICATIONS & VARIATIONS

BODY TYPE	SYSTEM WATTS	CCT	VOLTS	DIMMING OPTIONS	ELECTRICAL PHOTOCELL	HOUSING FINISH
HH	40	4	U	D	P	Z
L-HH	40 = 40W	4 = 4000k	U = 120-277V	D = Dimming	P = Photocell N = None	Z = Bronze V = Silver B = Black W = White G = Grey

HAWK HART



LED WALLPACK
50W | 4994 LUMENS | REPLACES 150W

ORDER NUMBER: **L-HH50-4UD-P-Z**



KEY BENEFITS

UL wet listed die-cast aluminum construction with UV stabilized polycarbonate lens complete with stainless steel hardware. Mounts to standard 4 inch square electrical junction boxes. Alternate junction box mounting possible via universal mounting ring. Ingress resistant gasket included.

- Economic grade architectural wall pack
- Mid-power LED chips and YG® driver technology
- Dimming option available
- Precision die cast
- Easy wall mount installation
- IP65 rated fixture for outdoor use
- Chip and fade resistant powder coat finish in any color
- Forward throw reflector
- Industrial grade, Button-type photocell
- Dark sky compliant mounting

APPLICATIONS

Ideal for driveways adjacent to buildings and outside warehousing

CERTIFICATIONS

• DLC 4.1 Premium • cUL-us Listed



* Please refer to the DLC QPL website for the latest and most complete information at www.designlights.org/QPL


PRODUCT PERFORMANCE

SYSTEM WATTAGE	LED WATTAGE	LUMENS	LP/W	CRI	REPLACES (MH)
50W	45W	4994 lm	100 lm/w	≥80	150W

PRODUCT SUMMARY


EFFICACY	>105 lm/w
LED CHIP	Mid-power
CCT	4000K
DRIVER	Dimmable LED power supplies, Current can be adjusted The 0-10V Dimming type is continuous, The product can dim to 10%
DRIVER EFFICIENCY	>85%
DIMENSIONS	10.22 x 7.80 x 5.02
WEIGHT	5.25 lbs
STANDARD LIFETIME	Design minimum 75,000 hours
STANDARD WARRANTY	5 Years
WATER PROOFING GRADE	IP65

PRODUCT DIMENSIONS

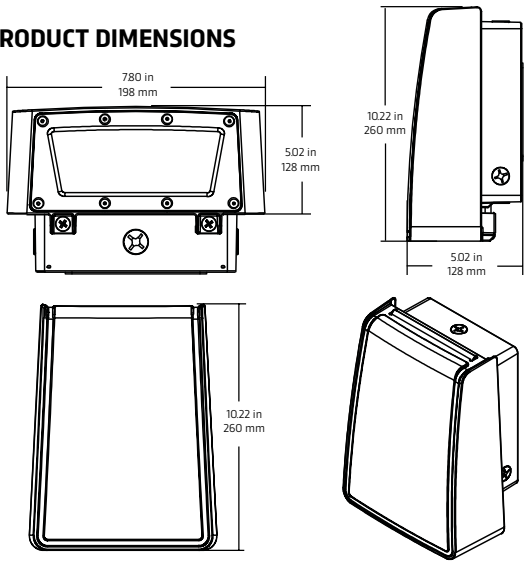

PRODUCT PHOTOMETRY

MOUNTED AT 12ft.

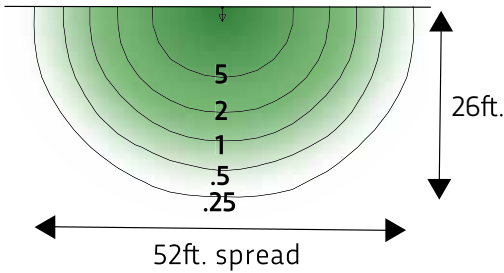

PRODUCT SPECIFICATIONS & VARIATIONS

BODY TYPE	SYSTEM WATTS	CCT	VOLTS	DIMMING OPTIONS	ELECTRICAL PHOTOCELL	HOUSING FINISH
HH	50	4	U	D	P	Z
L-HH	50 = 50W	4 = 4000k	U = 120-277V	D = Dimming	P = Photocell N = None	Z = Bronze V = Silver B = Black W = White G = Grey

HAWK HART



LED WALLPACK
80W | 7802 LUMENS | REPLACES 250W

ORDER NUMBER: **L-HH80-WWU-DZ4**



KEY BENEFITS

UL wet listed die-cast aluminum construction with UV stabilized polycarbonate lens complete with stainless steel hardware. Mounts to standard 4 inch square electrical junction boxes. Alternate junction box mounting possible via universal mounting ring. Ingress resistant gasket included.

- Economic grade architectural wall pack
- Mid-power LED chips and YG® driver technology
- Dimming option available
- Precision die cast
- Easy wall mount installation
- IP65 rated fixture for outdoor use
- Chip and fade resistant powder coat finish in any color
- Forward throw reflector
- Industrial grade, Button-type photocell
- Dark sky compliant mounting

APPLICATIONS

Ideal for driveways adjacent to buildings and outside warehousing

CERTIFICATIONS

• DLC 4.1 Premium • cUL-us Listed



* Please refer to the DLC QPL website for the latest and most complete information at www.designlights.org/QPL


PRODUCT PERFORMANCE

SYSTEM WATTAGE	LED WATTAGE	LUMENS	LP/W	CRI	REPLACES (MH)
80W	70W	7802 lm	100 lm/w	≥80	250W

PRODUCT SUMMARY


EFFICACY	>100 lm/w
LED CHIP	Mid-power
CCT	4000K
DRIVER	Dimmable LED power supplies, Current can be adjusted The 0-10V Dimming type is continuous, The product can dim to 10%
DRIVER EFFICIENCY	>85%
DIMENSIONS	11.76 x 9.41 x 5.02
WEIGHT	8.25 lbs
STANDARD LIFETIME	Design minimum 75,000 hours
STANDARD WARRANTY	5 Years
WATER PROOFING GRADE	IP65

PRODUCT DIMENSIONS

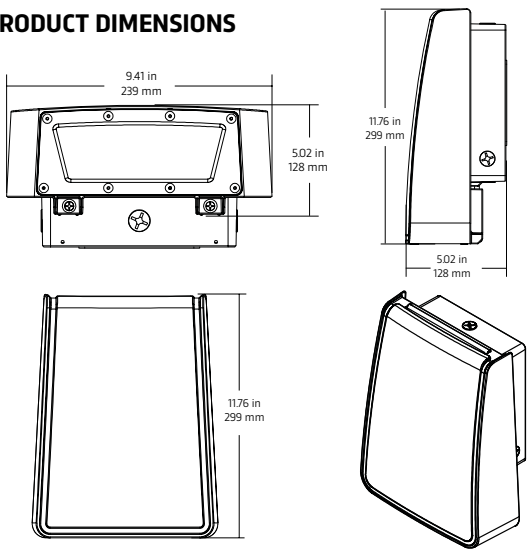

PRODUCT PHOTOMETRY

MOUNTED AT 15ft.

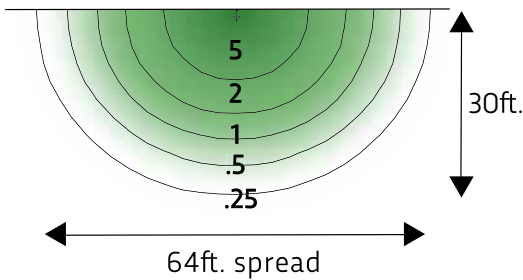

PRODUCT SPECIFICATIONS & VARIATIONS

BODY TYPE	SYSTEM WATTS	CCT	VOLTS	DIMMING OPTIONS	ELECTRICAL PHOTOCELL	HOUSING FINISH
HH	80	4	U	D	P	Z
L-HH	80 = 80W	4 = 4000k	U = 120-277V	D = Dimming	P = Photocell N = None	Z = Bronze V = Silver B = Black W = White G = Grey

MUSTANG

LED WALLPACK
52W | 7086 LUMENS | REPLACES 200W

ORDER NUMBER: **L-MU52-4UD-PZ**



KEY BENEFITS

UL wet listed die-cast aluminum construction with UV stabilized polycarbonate lens complete with stainless steel hardware. Mounts to standard 4 inch square electrical junction boxes. Alternate junction box mounting possible via universal mounting ring. Ingress resistant gasket included.

- Economic grade architectural wall pack
- Mid-power LED chips and YG® driver technology
- Dimming option available
- Precision die cast
- Easy wall mount installation
- IP65 rated fixture for outdoor use
- Chip and fade resistant powder coat finish in any color
- Forward throw reflector
- Industrial grade, Button-type photocell
- Dark sky compliant mounting

APPLICATIONS

Ideal for driveways adjacent to buildings and outside warehousing

CERTIFICATIONS

• DLC 4.1 Premium • cUL-us Listed



* Please refer to the DLC QPL website for the latest and most complete information at www.designlights.org/QPL


PRODUCT PERFORMANCE

SYSTEM WATTAGE	LED WATTAGE	LUMENS	LP/W	CRI	REPLACES (MH)
52W	46W	7086 lm	136 lm/w	≥70	200W

PRODUCT SUMMARY


EFFICACY	>136 lm/w
LED CHIP	Mid-power
CCT	4000K
DRIVER	Dimmable LED power supplies, Current can be adjusted The 0-10V Dimming type is continuous, The product can dim to 10%
DRIVER EFFICIENCY	>85%
DIMENSIONS	12.62 x 11.58 x 6.64
WEIGHT	8.25 lbs
STANDARD LIFETIME	Design minimum 75,000 hours
STANDARD WARRANTY	5 Years
WATER PROOFING GRADE	IP65

PRODUCT DIMENSIONS

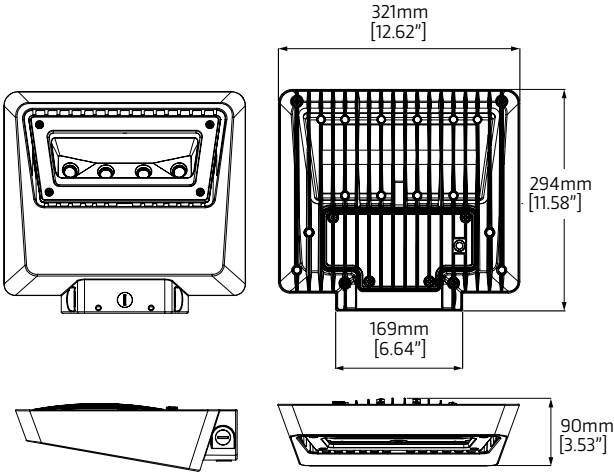

PRODUCT PHOTOMETRY

MOUNTED AT 15ft.

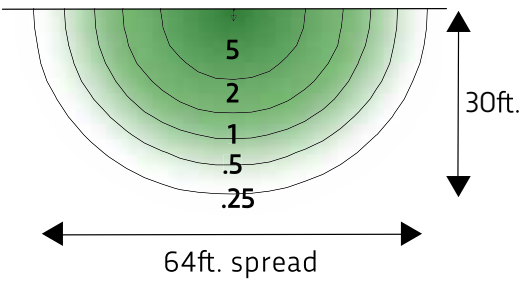

PRODUCT SPECIFICATIONS & VARIATIONS

BODY TYPE	SYSTEM WATTS	CCT	VOLTS	DIMMING OPTIONS	ELECTRICAL PHOTOCELL	HOUSING FINISH
MU	52	4	U	D	P	Z
L-MU	52 = 52W	4 = 4000k	U = 120-277V	D = Dimming	P = Photocell N = None	Z = Bronze V = Silver B = Black W = White G = Grey

MUSTANG

LED WALLPACK
28W | 3519 LUMENS | REPLACES 150W

ORDER NUMBER: **L-MU28-4UD-P-Z**



KEY BENEFITS

UL wet listed die-cast aluminum construction with UV stabilized polycarbonate lens complete with stainless steel hardware. Mounts to standard 4 inch square electrical junction boxes. Alternate junction box mounting possible via universal mounting ring. Ingress resistant gasket included.

- Economic grade architectural wall pack
- Mid-power LED chips and YG® driver technology
- Dimming option available
- Precision die cast
- Easy wall mount installation
- IP65 rated fixture for outdoor use
- Chip and fade resistant powder coat finish in any color
- Forward throw reflector
- Industrial grade, Button-type photocell
- Dark sky compliant mounting

APPLICATIONS

Ideal for driveways adjacent to buildings and outside warehousing

CERTIFICATIONS

• DLC 4.1 Premium • cUL-us Listed



* Please refer to the DLC QPL website for the latest and most complete information at www.designlights.org/QPL


PRODUCT PERFORMANCE

SYSTEM WATTAGE	LED WATTAGE	LUMENS	LP/W	CRI	REPLACES (MH)
28W	25W	3519 lm	126 lm/w	≥70	150W

PRODUCT SUMMARY


EFFICACY	>126 lm/w
LED CHIP	Mid-power
CCT	4000K
DRIVER	Dimmable LED power supplies, Current can be adjusted The 0-10V Dimming type is continuous, The product can dim to 10%
DRIVER EFFICIENCY	>85%
DIMENSIONS	11.04 x 9.5 x 3.11
WEIGHT	8.25 lbs
STANDARD LIFETIME	Design minimum 75,000 hours
STANDARD WARRANTY	5 Years
WATER PROOFING GRADE	IP65

PRODUCT DIMENSIONS

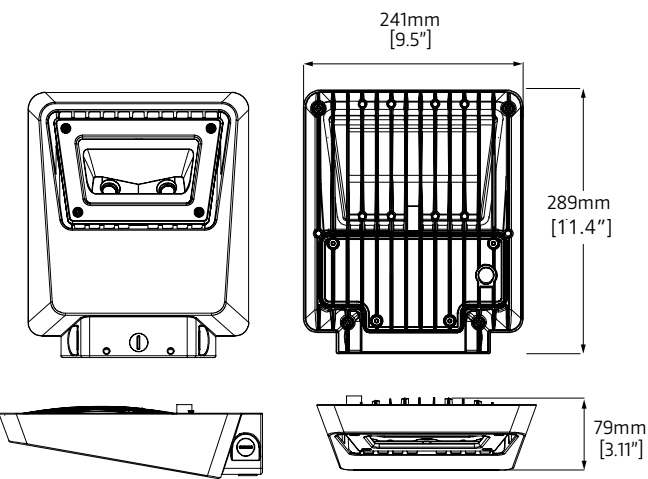

PRODUCT PHOTOMETRY

MOUNTED AT 10ft.

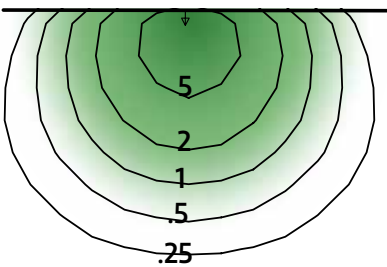

PRODUCT SPECIFICATIONS & VARIATIONS

BODY TYPE	SYSTEM WATTS	CCT	VOLTS	DIMMING OPTIONS	ELECTRICAL PHOTOCELL	HOUSING FINISH
MU	28	4	U	D	P	Z
L-MU	28 = 28W	4 = 4000k	U = 120-277V	D = Dimming	P = Photocell N = None	Z = Bronze V = Silver B = Black W = White G = Grey



MUSTANG

LED WALLPACK
14W | 1540 LUMENS | REPLACES 70W

ORDER NUMBER: **L-MU14-4UD-P-Z**



KEY BENEFITS

UL wet listed die-cast aluminum construction with UV stabilized polycarbonate lens complete with stainless steel hardware. Mounts to standard 4 inch square electrical junction boxes. Alternate junction box mounting possible via universal mounting ring. Ingress resistant gasket included.

- Economic grade architectural wall pack
- Mid-power LED chips and YG® driver technology
- Dimming option available
- Precision die cast
- Easy wall mount installation
- IP65 rated fixture for outdoor use
- Chip and fade resistant powder coat finish in any color
- Forward throw reflector
- Industrial grade, Button-type photocell
- Dark sky compliant mounting

APPLICATIONS

Ideal for driveways adjacent to buildings and outside warehousing

CERTIFICATIONS

• DLC 4.1 Premium • cUL-us Listed



* Please refer to the DLC QPL website for the latest and most complete information at www.designlights.org/QPL


PRODUCT PERFORMANCE

SYSTEM WATTAGE	LED WATTAGE	LUMENS	LP/W	CRI	REPLACES (MH)
14W	13W	1540 lm	110 lm/w	≥70	70W


PRODUCT SUMMARY

EFFICACY	>110 lm/w
LED CHIP	Mid-power
CCT	4000K
DRIVER	Dimmable LED power supplies, Current can be adjusted The 0-10V Dimming type is continuous, The product can dim to 10%
DRIVER EFFICIENCY	>85%
DIMENSIONS	11.04 x 9.5 x 3.11
WEIGHT	8.25 lbs
STANDARD LIFETIME	Design minimum 75,000 hours
STANDARD WARRANTY	5 Years
WATER PROOFING GRADE	IP65

PRODUCT DIMENSIONS

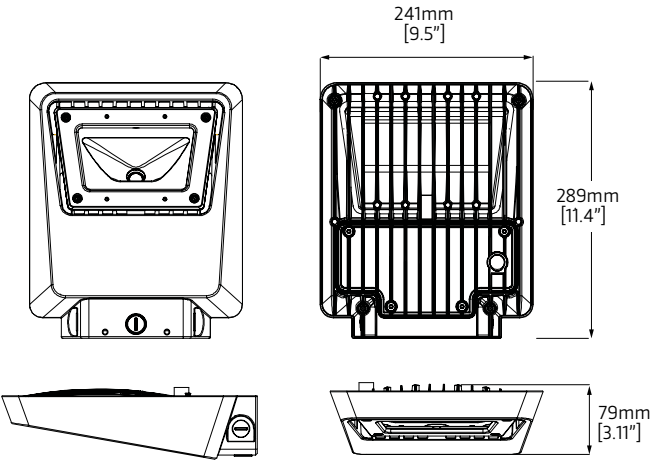

PRODUCT PHOTOMETRY

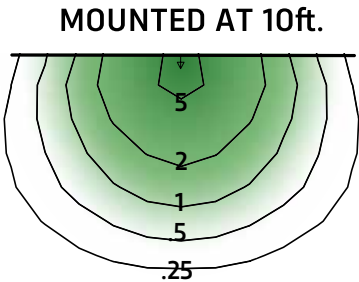

PRODUCT SPECIFICATIONS & VARIATIONS

BODY TYPE	SYSTEM WATTS	CCT	VOLTS	DIMMING OPTIONS	ELECTRICAL PHOTOCELL	HOUSING FINISH
MU	14	4	U	D	P	Z
L-MU	14 = 14W	4 = 4000k	U = 120-277V	D = Dimming	P = Photocell N = None	Z = Bronze V = Silver B = Black W = White G = Grey

MUSTANG

LED WALLPACK
20W | 2200 LUMENS | REPLACES 100W

ORDER NUMBER: **L-MU20-4UD-P-Z**



KEY BENEFITS

UL wet listed die-cast aluminum construction with UV stabilized polycarbonate lens complete with stainless steel hardware. Mounts to standard 4 inch square electrical junction boxes. Alternate junction box mounting possible via universal mounting ring. Ingress resistant gasket included.

- Economic grade architectural wall pack
- Mid-power LED chips and YG® driver technology
- Dimming option available
- Precision die cast
- Easy wall mount installation
- IP65 rated fixture for outdoor use
- Chip and fade resistant powder coat finish in any color
- Forward throw reflector
- Industrial grade, Button-type photocell
- Dark sky compliant mounting

APPLICATIONS

Ideal for driveways adjacent to buildings and outside warehousing

CERTIFICATIONS

• DLC 4.1 Premium • cUL-us Listed



* Please refer to the DLC QPL website for the latest and most complete information at www.designlights.org/QPL


PRODUCT PERFORMANCE

SYSTEM WATTAGE	LED WATTAGE	LUMENS	LP/W	CRI	REPLACES (MH)
20W	18W	2200 lm	110 lm/w	≥70	100W

PRODUCT SUMMARY


EFFICACY	>110 lm/w
LED CHIP	Mid-power
CCT	4000K
DRIVER	Dimmable LED power supplies, Current can be adjusted The 0-10V Dimming type is continuous, The product can dim to 10%
DRIVER EFFICIENCY	>85%
DIMENSIONS	11.04 x 9.5 x 3.11
WEIGHT	8.25 lbs
STANDARD LIFETIME	Design minimum 75,000 hours
STANDARD WARRANTY	5 Years
WATER PROOFING GRADE	IP65

PRODUCT DIMENSIONS

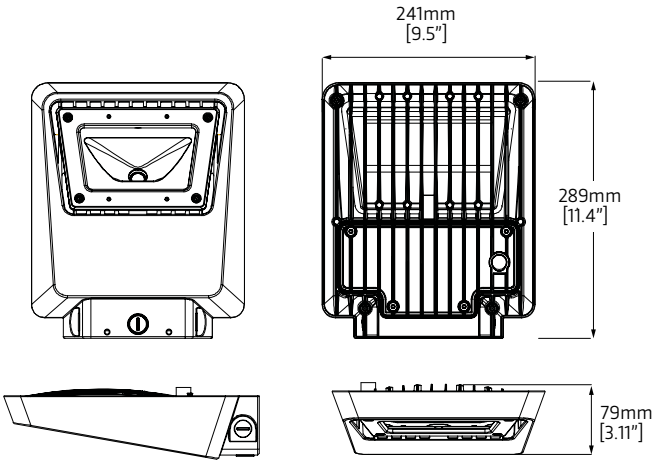

PRODUCT PHOTOMETRY

MOUNTED AT 10ft.

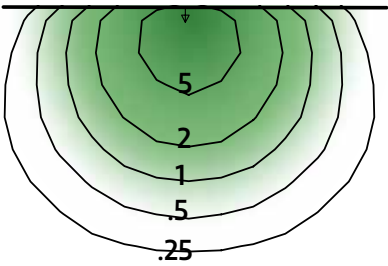

PRODUCT SPECIFICATIONS & VARIATIONS

BODY TYPE	SYSTEM WATTS	CCT	VOLTS	DIMMING OPTIONS	ELECTRICAL PHOTOCELL	HOUSING FINISH
MU	20	4	U	D	P	Z
L-MU	20 = 20W	4 = 4000k	U = 120-277V	D = Dimming	P = Photocell N = None	Z = Bronze V = Silver B = Black W = White G = Grey

VANGUARD

LED WALLPACK
26W | 3473 LUMENS | REPLACES 100W

ORDER NUMBER: **L-VA26-4UD-P-Z**



KEY BENEFITS

UL wet listed die-cast aluminum construction with tempered glass lens complete with stainless steel hardware. Mounts to standard 4 inch square electrical junction boxes. Alternate junction box mounting possible via universal mounting ring. Ingress resistant gasket included.

- Citizen® COB LED's and YG® driver technology
- Dimming option available
- Precision die cast • IP65 rated fixture for outdoor use
- Chip and fade resistant powder coat finish in many colors
- Highly specular forward throw reflector
- Industrial grade, Button-type Photocell
- Easy installation with hands free mounting
- Dark sky compliant mounting with optional Dark Sky Adaptor.

APPLICATIONS

Ideal for driveways adjacent to buildings and outside warehousing

CERTIFICATIONS

• DLC 4.1 Premium • cUL-us Listed



* Please refer to the DLC QPL website for the latest and most complete information at www.designlights.org/QPL


PRODUCT PERFORMANCE

SYSTEM WATTAGE	LED WATTAGE	LUMENS	LP/W	CRI	REPLACES (MH)
26W	23W	3473 lm	124 lm/w	≥80	100W


PRODUCT SUMMARY

EFFICACY	>124 lm/w
LED CHIP	Citizen COB LED's
CCT	4000K
DRIVER	Dimmable LED power supplies, Current can be adjusted The 0-10V Dimming type is continuous, The product can dim to 10%
DRIVER EFFICIENCY	>85%
DIMENSIONS	9.77 x 8.45 x 2.85
WEIGHT	11.02 lbs
STANDARD LIFETIME	Design minimum 75,000 hours
STANDARD WARRANTY	5 Years
WATER PROOFING GRADE	IP65

PRODUCT DIMENSIONS

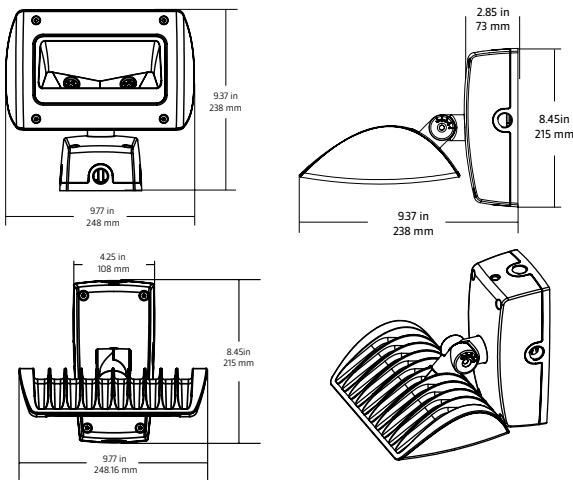

PRODUCT PHOTOMETRY

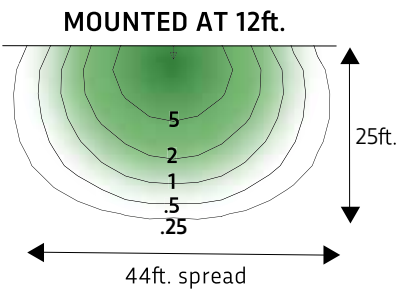

PRODUCT SPECIFICATIONS & VARIATIONS

BODY TYPE	SYSTEM WATTS	CCT	VOLTS	DIMMING OPTIONS	ELECTRICAL PHOTOCELL	HOUSING FINISH
VA	26	4	U	D	P	Z
L-VA	26 = 26W	4 = 4000k	U = 120-277V	D = Dimming	P = Photocell N = None	Z = Bronze V = Silver B = Black W = White G = Grey

VANGUARD

LED WALLPACK
52W | 6953 LUMENS | REPLACES 150W

ORDER NUMBER: **L-VA52-4UD-P-Z**



KEY BENEFITS

UL wet listed die-cast aluminum construction with tempered glass lens complete with stainless steel hardware. Mounts to standard 4 inch square electrical junction boxes. Alternate junction box mounting possible via universal mounting ring. Ingress resistant gasket included.

- Citizen® COB LED's and YG® driver technology
- Dimming option available
- Precision die cast
- IP65 rated fixture for outdoor use
- Chip and fade resistant powder coat finish in many colors
- Highly specular forward throw reflector
- Industrial grade, Button-type Photocell
- Easy installation with hands free mounting
- Dark sky compliant mounting with optional Dark Sky Adaptor.

APPLICATIONS

Ideal for driveways adjacent to buildings and outside warehousing

CERTIFICATIONS

• DLC 4.1 Premium • cUL-us Listed



* Please refer to the DLC QPL website for the latest and most complete information at www.designlights.org/QPL


PRODUCT PERFORMANCE

SYSTEM WATTAGE	LED WATTAGE	LUMENS	LP/W	CRI	REPLACES (MH)
52W	46W	6953 lm	129 lm/w	≥80	150W

PRODUCT SUMMARY


EFFICACY	>129 lm/w
LED CHIP	Citizen COB LED's
CCT	4000K
DRIVER	Dimmable LED power supplies, Current can be adjusted The 0-10V Dimming type is continuous, The product can dim to 10%
DRIVER EFFICIENCY	>85%
DIMENSIONS	15 x 8.45 x 2.85
WEIGHT	13.89 lbs
STANDARD LIFETIME	Design minimum 75,000 hours
STANDARD WARRANTY	5 Years
WATER PROOFING GRADE	IP65

PRODUCT DIMENSIONS

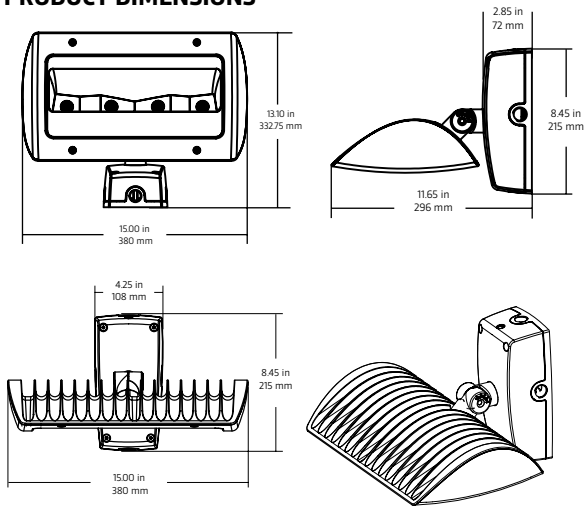

PRODUCT PHOTOMETRY

MOUNTED AT 12ft.

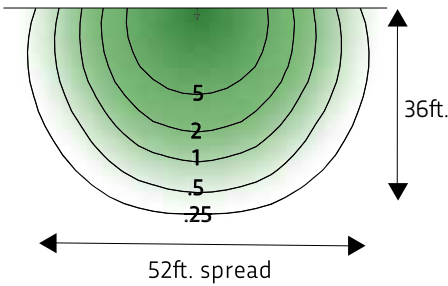

PRODUCT SPECIFICATIONS & VARIATIONS

BODY TYPE	SYSTEM WATTS	CCT	VOLTS	DIMMING OPTIONS	ELECTRICAL PHOTOCELL	HOUSING FINISH
VA	52	4	U	D	P	Z
L-VA	52 = 52W	4 = 4000k	U = 120-277V	D = Dimming	P = Photocell N = None	Z = Bronze V = Silver B = Black W = White G = Grey

VANGUARD

LED WALLPACK
76W | 9940 LUMENS | REPLACES 200W

ORDER NUMBER: **L-VA76-4UD-P-Z**



KEY BENEFITS

UL wet listed die-cast aluminum construction with tempered glass lens complete with stainless steel hardware. Mounts to standard 4 inch square electrical junction boxes. Alternate junction box mounting possible via universal mounting ring. Ingress resistant gasket included.

- Citizen® COB LED's and YG® driver technology
- Dimming option available
- Precision die cast • IP65 rated fixture for outdoor use
- Chip and fade resistant powder coat finish in many colors
- Highly specular forward throw reflector
- Industrial grade, Button-type Photocell
- Easy installation with hands free mounting
- Dark sky compliant mounting with optional Dark Sky Adaptor.

APPLICATIONS

Ideal for driveways adjacent to buildings and outside warehousing

CERTIFICATIONS

• DLC 4.1 Premium • cUL-us Listed



* Please refer to the DLC QPL website for the latest and most complete information at www.designlights.org/QPL


PRODUCT PERFORMANCE

SYSTEM WATTAGE	LED WATTAGE	LUMENS	LP/W	CRI	REPLACES (MH)
76W	66W	9940 lm	123 lm/w	≥80	200W

PRODUCT SUMMARY


EFFICACY	>123 lm/w
LED CHIP	Citizen COB LED's
CCT	4000K
DRIVER	Dimmable LED power supplies, Current can be adjusted The 0-10V Dimming type is continuous, The product can dim to 10%
DRIVER EFFICIENCY	>85%
DIMENSIONS	15 x 8.45 x 2.85
WEIGHT	13.89 lbs
STANDARD LIFETIME	Design minimum 75,000 hours
STANDARD WARRANTY	5 Years
WATER PROOFING GRADE	IP65

PRODUCT DIMENSIONS

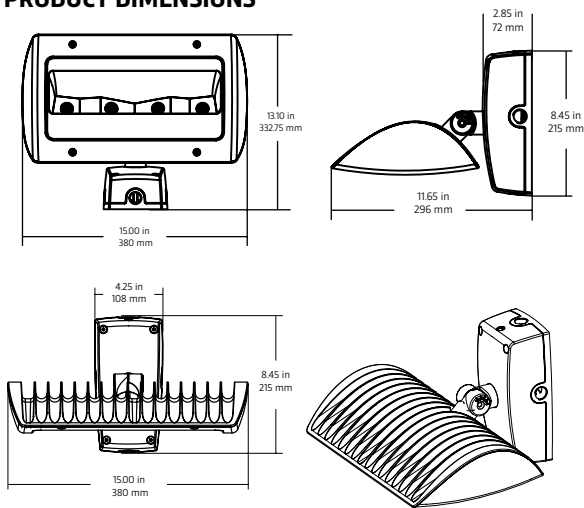

PRODUCT PHOTOMETRY

MOUNTED AT 15ft.

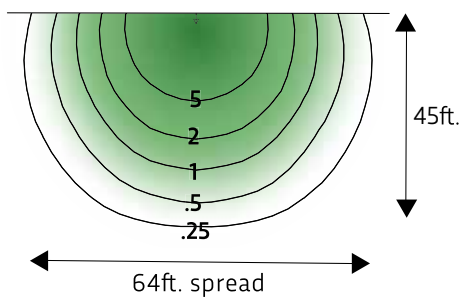

PRODUCT SPECIFICATIONS & VARIATIONS

BODY TYPE	SYSTEM WATTS	CCT	VOLTS	DIMMING OPTIONS	ELECTRICAL PHOTOCELL	HOUSING FINISH
VA	76	4	U	D	P	Z
L-VA	76 = 76W	4 = 4000k	U = 120-277V	D = Dimming	P = Photocell N = None	Z = Bronze V = Silver B = Black W = White G = Grey

NOMAD

LED WALLPACK
20W | 1993 LUMENS | REPLACES 70W

ORDER NUMBER: **L-N020-4UD-P-Z**



KEY BENEFITS

UL wet listed die-cast aluminum construction with borosilicate glass lens or UV stabilized polycarbonate diffuser complete with stainless steel hardware. Mounts to standard 4 inch square electrical junction boxes. Alternate junction box mounting possible via universal mounting ring. Ingress resistant gasket included.

- Same footprint as traditional HID fixtures • Premium brand LEDs (Phillips® chips depending on SKU) and YG® driver technology • Dimming option available
- Precision die-cast Aluminum • Wet location rated fixture for outdoor use • Chip and fade resistant powder coat finish in any color • Precision prismatic reflector
- Industrial grade, Standard button Photocell available

APPLICATIONS

Ideal for driveways adjacent to buildings and outside warehousing

CERTIFICATIONS

• DLC 4.1 Premium • cUL-us Listed



* Please refer to the DLC QPL website for the latest and most complete information at www.designlights.org/QPL


PRODUCT PERFORMANCE

SYSTEM WATTAGE	LED WATTAGE	LUMENS	LP/W	CRI	REPLACES (MH)
20W	18W	1933 lm	113 lm/w	≥80	70W


PRODUCT SUMMARY

EFFICACY	>113 lm/w
LED CHIP	Premium brand LEDs (Phillips® chips depending on SKU)
CCT	4000K
DRIVER	Dimmable LED power supplies, Current can be adjusted The 0-10V Dimming type is continuous, The product can dim to 10%
DRIVER EFFICIENCY	>85%
DIMENSIONS	9.2 x 8.7 x 8.4
WEIGHT	7.7 lbs
STANDARD LIFETIME	Design minimum 75,000 hours
STANDARD WARRANTY	5 Years
WATER PROOFING GRADE	IP65

PRODUCT DIMENSIONS

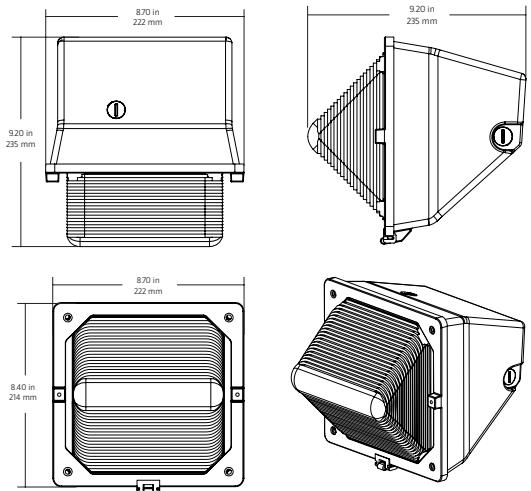

PRODUCT PHOTOMETRY

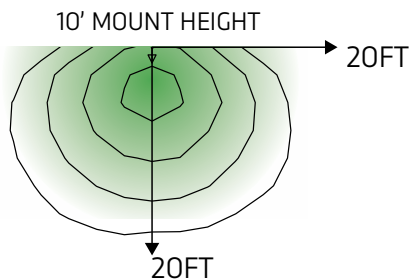

PRODUCT SPECIFICATIONS & VARIATIONS

BODY TYPE	SYSTEM WATTS	CCT	VOLTS	DIMMING OPTIONS	ELECTRICAL PHOTOCELL	HOUSING FINISH
NO	20	4	U	D	P	Z
L-NO	20 = 20W	4 = 4000k	U = 120-277V	D = Dimming	P = Photocell N = None	Z = Bronze V = Silver B = Black W = White G = Grey

WARWICK

LED WALLPACK
20W | 1827 LUMENS | REPLACES 70W

ORDER NUMBER: **L-WW20-4UD-P-Z**



KEY BENEFITS

UL wet listed die-cast aluminum construction with borosilicate glass lens or UV stabilized polycarbonate diffuser complete with stainless steel hardware. Mounts to standard 4 inch square electrical junction boxes. Alternate junction box mounting possible via universal mounting ring. Ingress resistant gasket included.

- Same footprint as traditional HID fixtures • Premium brand LEDs (Phillips® chips depending on SKU) and YG® driver technology • Dimming option available • Precision die-cast Aluminum • Wet location rated fixture for outdoor use • Chip and fade resistant powder coat finish in any color • Precision prismatic reflector • Industrial grade, Standard button Photocell available

APPLICATIONS

Ideal for driveways adjacent to buildings and outside warehousing

CERTIFICATIONS

• DLC 4.1 Premium • cUL-us Listed



* Please refer to the DLC QPL website for the latest and most complete information at www.designlights.org/QPL


PRODUCT PERFORMANCE

SYSTEM WATTAGE	LED WATTAGE	LUMENS	LP/W	CRI	REPLACES (MH)
20W	18W	1827 lm	95 lm/w	≥80	70W


PRODUCT SUMMARY

EFFICACY	>95 lm/w
LED CHIP	Premium brand LEDs (Phillips® chips depending on SKU)
CCT	4000K
DRIVER	Dimmable LED power supplies, Current can be adjusted The 0-10V Dimming type is continuous, The product can dim to 10%
DRIVER EFFICIENCY	>85%
DIMENSIONS	13x7.9 x5.5
WEIGHT	7.08 lbs
STANDARD LIFETIME	Design minimum 75,000 hours
STANDARD WARRANTY	5 Years
WATER PROOFING GRADE	IP65

PRODUCT DIMENSIONS

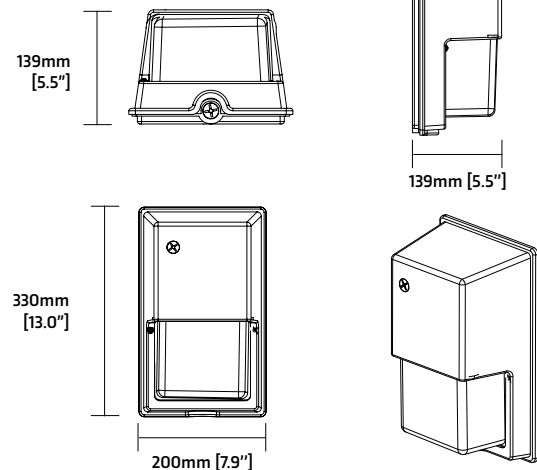

PRODUCT PHOTOMETRY

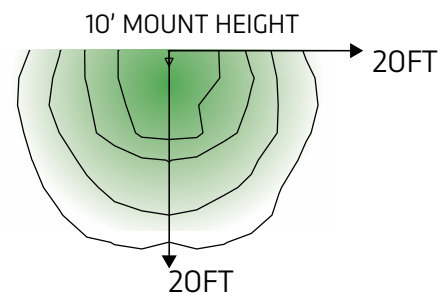

PRODUCT SPECIFICATIONS & VARIATIONS

BODY TYPE	SYSTEM WATTS	CCT	VOLTS	DIMMING OPTIONS	ELECTRICAL PHOTOCELL	HOUSING FINISH
WW	20	4	U	D	P	Z
L-WW	20 = 20W	4 = 4000k	U = 120-277V	D = Dimming	P = Photocell N = None	Z = Bronze V = Silver B = Black W = White G = Grey

FALCON

LED WALLPACK
35W | 3850 LUMENS | REPLACES 150W

ORDER NUMBER: **L-FA35-4UD-P-Z**



KEY BENEFITS

UL wet listed die-cast aluminum construction with tempered glass lens or borosilicate glass reflectors, complete with stainless steel hardware. Mounts to standard 4 inch square electrical junction boxes. Alternate junction box mounting possible via universal mounting ring. Ingress resistant gasket included.

- Same foot print as traditional HID fixtures • Premium brand LEDs (Phillips® chips depending on SKU) and YG® driver technology • Dimming option available
- Precision die-cast Aluminum • Wet location rated fixture for outdoor use • Chip and fade resistant powder coat finish in any color • Precision prismatic refractor
- Industrial grade, Button-type photocell.

APPLICATIONS

Ideal for driveways adjacent to buildings and outside warehousing

CERTIFICATIONS

• DLC 4.1 Premium • cUL-us Listed



* Please refer to the DLC QPL website for the latest and most complete information at www.designlights.org/QPL


PRODUCT PERFORMANCE

SYSTEM WATTAGE	LED WATTAGE	LUMENS	LP/W	CRI	REPLACES (MH)
35W	30W	3850 lm	110 lm/w	≥80	150W

PRODUCT SUMMARY


EFFICACY	>110 lm/w
LED CHIP	Premium brand LEDs (Phillips® chips depending on SKU)
CCT	4000K
DRIVER	Dimmable LED power supplies, Current can be adjusted The 0-10V Dimming type is continuous, The product can dim to 10%
DRIVER EFFICIENCY	>85%
DIMENSIONS	14.3 x 9.2 x 7.5
WEIGHT	8.82 lbs
STANDARD LIFETIME	Design minimum 75,000 hours
STANDARD WARRANTY	5 Years
WATER PROOFING GRADE	IP65

PRODUCT DIMENSIONS

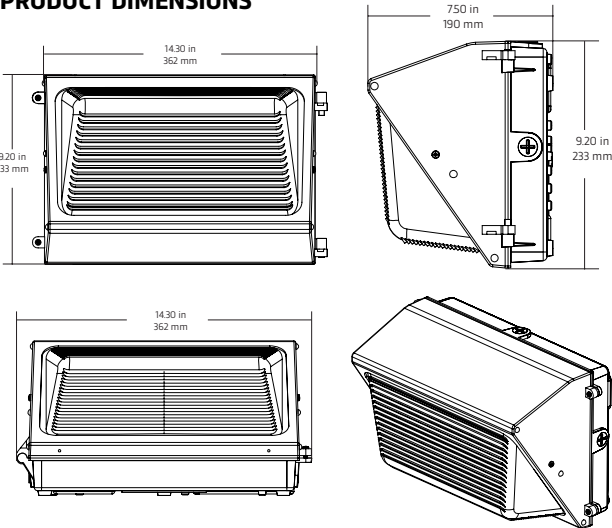

PRODUCT PHOTOMETRY

MOUNTED AT 12ft.

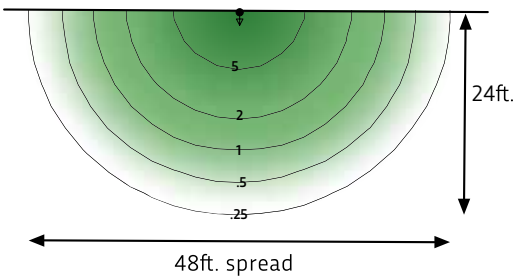

PRODUCT SPECIFICATIONS & VARIATIONS

BODY TYPE	SYSTEM WATTS	CCT	VOLTS	DIMMING OPTIONS	ELECTRICAL PHOTOCELL	HOUSING FINISH
FA	35	4	U	D	P	Z
L-FA Falcon	35 = 35W	4 = 4000k	U = 120-277V	D = Dimming	P = Photocell N = None	Z = Bronze V = Silver B = Black W = White G = Grey

FALCON

LED WALLPACK
50W | 5641 LUMENS | REPLACES 175W

ORDER NUMBER: **L-FA50-4UD-P-Z**



KEY BENEFITS

UL wet listed die-cast aluminum construction with tempered glass lens or borosilicate glass reflectors, complete with stainless steel hardware. Mounts to standard 4 inch square electrical junction boxes. Alternate junction box mounting possible via universal mounting ring. Ingress resistant gasket included.

- Same foot print as traditional HID fixtures • Premium brand LEDs (Phillips® chips depending on SKU) and YG® driver technology • Dimming option available
- Precision die-cast Aluminum • Wet location rated fixture for outdoor use • Chip and fade resistant powder coat finish in any color • Precision prismatic refractor
- Industrial grade, Button-type photocell.

APPLICATIONS

Ideal for driveways adjacent to buildings and outside warehousing

CERTIFICATIONS

• DLC 4.1 Premium • cUL-us Listed



* Please refer to the DLC QPL website for the latest and most complete information at www.designlights.org/QPL


PRODUCT PERFORMANCE

SYSTEM WATTAGE	LED WATTAGE	LUMENS	LP/W	CRI	REPLACES (MH)
50W	45W	5641 lm	116 lm/w	≥80	175W

PRODUCT SUMMARY


EFFICACY	>116 lm/w
LED CHIP	Premium brand LEDs (Phillips® chips depending on SKU)
CCT	4000K
DRIVER	Dimmable LED power supplies, Current can be adjusted The 0-10V Dimming type is continuous, The product can dim to 10%
DRIVER EFFICIENCY	>85%
DIMENSIONS	14.3 x 9.2 x 7.5
WEIGHT	8.82 lbs
STANDARD LIFETIME	Design minimum 75,000 hours
STANDARD WARRANTY	5 Years
WATER PROOFING GRADE	IP65

PRODUCT DIMENSIONS

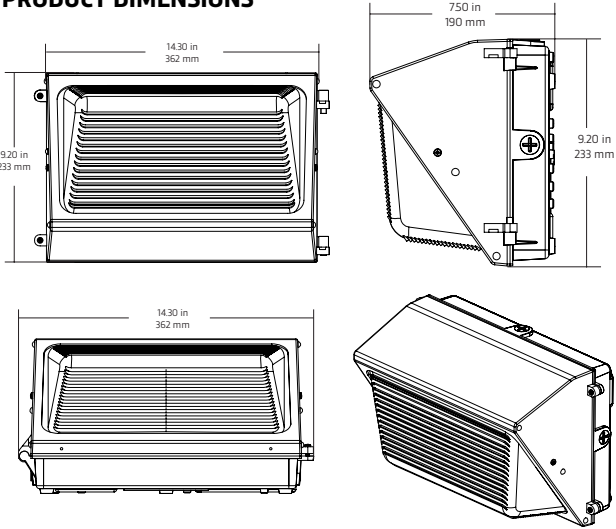

PRODUCT PHOTOMETRY

MOUNTED AT 12ft.

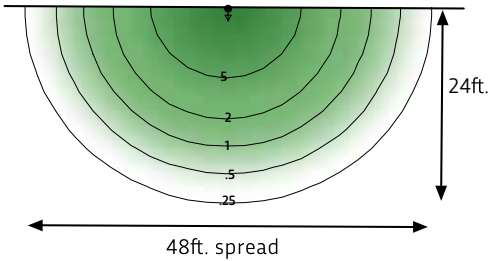

PRODUCT SPECIFICATIONS & VARIATIONS

BODY TYPE	SYSTEM WATTS	CCT	VOLTS	DIMMING OPTIONS	ELECTRICAL PHOTOCELL	HOUSING FINISH
FA	50	4	U	D	P	Z
L-FA Falcon	50 = 50W	4 = 4000k	U = 120-277V	D = Dimming	P = Photocell N = None	Z = Bronze V = Silver B = Black W = White G = Grey

FALCON

LED WALLPACK
70W | 8473 LUMENS | REPLACES 200W

ORDER NUMBER: **L-FA70-4UD-P-Z**



KEY BENEFITS

UL wet listed die-cast aluminum construction with tempered glass lens or borosilicate glass reflectors, complete with stainless steel hardware. Mounts to standard 4 inch square electrical junction boxes. Alternate junction box mounting possible via universal mounting ring. Ingress resistant gasket included.

- Same foot print as traditional HID fixtures
- Premium brand LEDs (Phillips® chips depending on SKU) and YG® driver technology
- Dimming option available
- Precision die-cast Aluminum
- Wet location rated fixture for outdoor use
- Chip and fade resistant powder coat finish in any color
- Precision prismatic refractor
- Industrial grade, Button-type photocell.

APPLICATIONS

Ideal for driveways adjacent to buildings and outside warehousing

CERTIFICATIONS

• DLC 4.1 Premium • cUL-us Listed



* Please refer to the DLC QPL website for the latest and most complete information at www.designlights.org/QPL


PRODUCT PERFORMANCE

SYSTEM WATTAGE	LED WATTAGE	LUMENS	LP/W	CRI	REPLACES (MH)
70W	62W	8473 lm	121 lm/w	≥80	200W


PRODUCT SUMMARY

EFFICACY	>121 lm/w
LED CHIP	Premium brand LEDs (Phillips® chips depending on SKU)
CCT	4000K
DRIVER	Dimmable LED power supplies, Current can be adjusted The 0-10V Dimming type is continuous, The product can dim to 10%
DRIVER EFFICIENCY	>85%
DIMENSIONS	14.3 x 9.2 x 7.5
WEIGHT	8.82 lbs
STANDARD LIFETIME	Design minimum 75,000 hours
STANDARD WARRANTY	5 Years
WATER PROOFING GRADE	IP65

PRODUCT DIMENSIONS

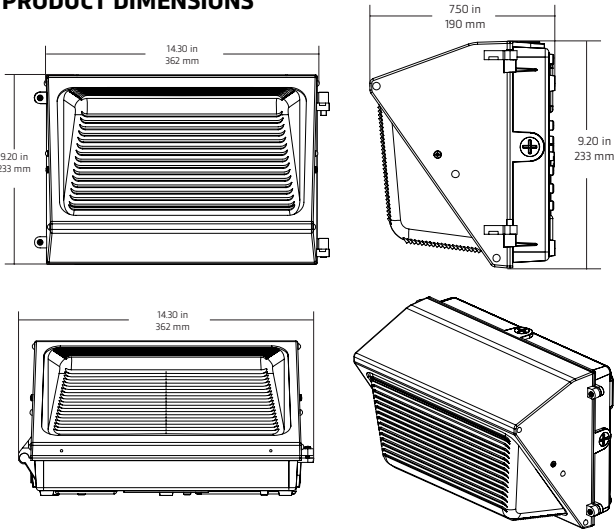

PRODUCT PHOTOMETRY

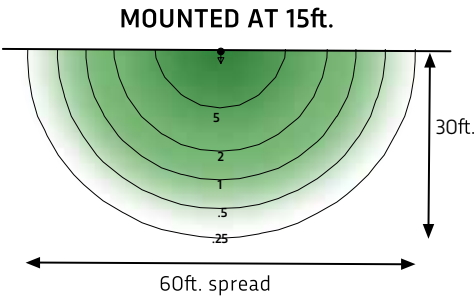

PRODUCT SPECIFICATIONS & VARIATIONS

BODY TYPE	SYSTEM WATTS	CCT	VOLTS	DIMMING OPTIONS	ELECTRICAL PHOTOCELL	HOUSING FINISH
FA	70	4	U	D	P	Z
L-FA Falcon	70 = 70W	4 = 4000k	U = 120-277V	D = Dimming	P = Photocell N = None	Z = Bronze V = Silver B = Black W = White G = Grey

FALCON



LED WALLPACK
100W | 11507 LUMENS | REPLACES 250W

ORDER NUMBER: **L-FA100-4UD-P-Z**



KEY BENEFITS

UL wet listed die-cast aluminum construction with tempered glass lens or borosilicate glass reflectors, complete with stainless steel hardware. Mounts to standard 4 inch square electrical junction boxes. Alternate junction box mounting possible via universal mounting ring. Ingress resistant gasket included.

- Same foot print as traditional HID fixtures • Premium brand LEDs (Phillips® chips depending on SKU) and YG® driver technology • Dimming option available
- Precision die-cast Aluminum • Wet location rated fixture for outdoor use • Chip and fade resistant powder coat finish in any color • Precision prismatic refractor
- Industrial grade, Button-type photocell.

APPLICATIONS

Ideal for driveways adjacent to buildings and outside warehousing

CERTIFICATIONS

• DLC 4.1 Premium • cUL-us Listed



* Please refer to the DLC QPL website for the latest and most complete information at www.designlights.org/QPL


PRODUCT PERFORMANCE

SYSTEM WATTAGE	LED WATTAGE	LUMENS	LP/W	CRI	REPLACES (MH)
100W	90W	11507 lm	118 lm/w	≥80	250W

PRODUCT SUMMARY


EFFICACY	>118 lm/w
LED CHIP	Premium brand LEDs (Phillips® chips depending on SKU)
CCT	4000K
DRIVER	Dimmable LED power supplies, Current can be adjusted The 0-10V Dimming type is continuous, The product can dim to 10%
DRIVER EFFICIENCY	>85%
DIMENSIONS	18.5 x 9.4 x 9.1
WEIGHT	17.64 lbs
STANDARD LIFETIME	Design minimum 75,000 hours
STANDARD WARRANTY	5 Years
WATER PROOFING GRADE	IP65

PRODUCT DIMENSIONS

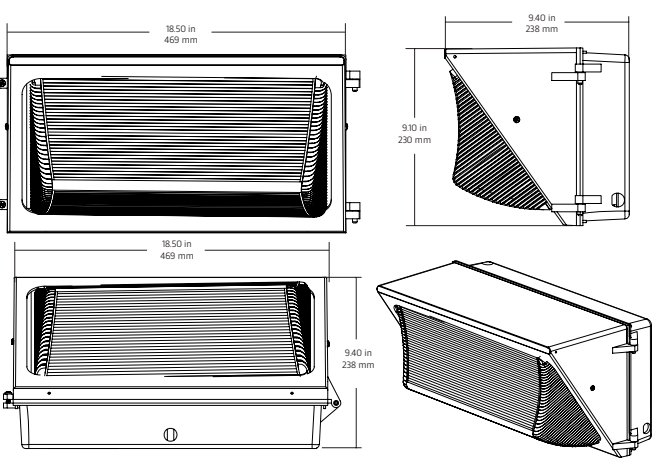

PRODUCT PHOTOMETRY

MOUNTED AT 15ft.

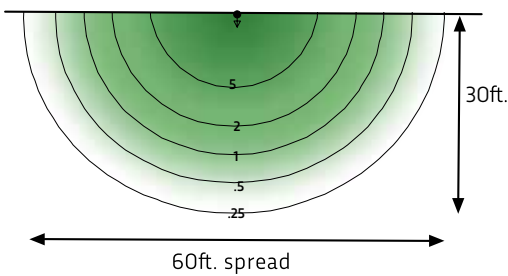

PRODUCT SPECIFICATIONS & VARIATIONS

BODY TYPE	SYSTEM WATTS	CCT	VOLTS	DIMMING OPTIONS	ELECTRICAL PHOTOCELL	HOUSING FINISH
FA	100	4	U	D	P	Z
L-FA Falcon	100 = 100W	4 = 4000k	U = 120-277V	D = Dimming	P = Photocell N = None	Z = Bronze V = Silver B = Black W = White G = Grey



FALCON FIRE

LED WALLPACK
35W | 3255 LUMENS | REPLACES 150W

ORDER NUMBER: **L-FF35-4UD-P-Z**



KEY BENEFITS

UL wet listed die-cast aluminum construction with tempered glass lens or borosilicate glass reflectors, complete with stainless steel hardware. Mounts to standard 4 inch square electrical junction boxes. Alternate junction box mounting possible via universal mounting ring. Ingress resistant gasket included.

- Same foot print as traditional HID fixtures
- Premium brand LEDs (Phillips® chips depending on SKU) and YG® driver technology
- Dimming option available
- Precision die-cast Aluminum
- Wet location rated fixture for outdoor use
- Chip and fade resistant powder coat finish in any color
- Precision prismatic refractor
- Industrial grade, Button-type photocell.

APPLICATIONS

Ideal for driveways adjacent to buildings and outside warehousing

CERTIFICATIONS

• DLC 4.1 Premium • cUL-us Listed



* Please refer to the DLC QPL website for the latest and most complete information at www.designlights.org/QPL


PRODUCT PERFORMANCE

SYSTEM WATTAGE	LED WATTAGE	LUMENS	LP/W	CRI	REPLACES (MH)
35W	30W	3255 lm	94 lm/w	≥80	150W


PRODUCT SUMMARY

EFFICACY	>94 lm/w
LED CHIP	Premium brand LEDs (Phillips® chips depending on SKU)
CCT	4000K
DRIVER	Dimmable LED power supplies, Current can be adjusted The 0-10V Dimming type is continuous, The product can dim to 10%
DRIVER EFFICIENCY	>85%
DIMENSIONS	14.2 x 11.4 x 9.1
WEIGHT	12.12 lbs
STANDARD LIFETIME	Design minimum 75,000 hours
STANDARD WARRANTY	5 Years
WATER PROOFING GRADE	IP65

PRODUCT DIMENSIONS

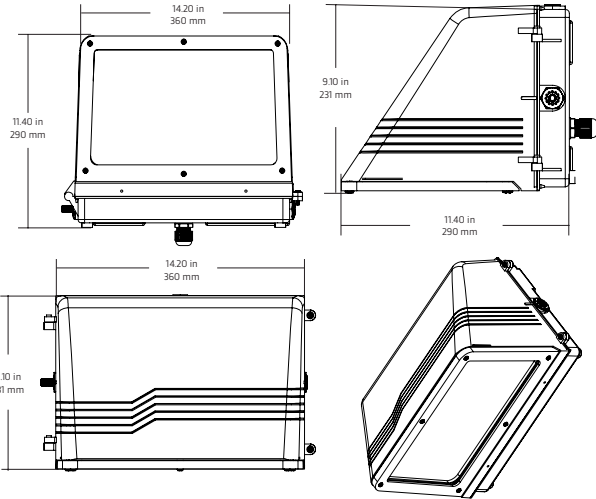

PRODUCT PHOTOMETRY

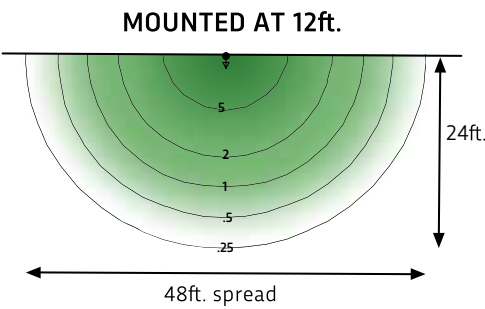

PRODUCT SPECIFICATIONS & VARIATIONS

BODY TYPE	SYSTEM WATTS	CCT	VOLTS	DIMMING OPTIONS	ELECTRICAL PHOTOCELL	HOUSING FINISH
FF	35	4	U	D	P	Z
L-FF Falcon Fire	35 = 35W	4 = 4000k	U = 120-277V	D = Dimming	P = Photocell N = None	Z = Bronze V = Silver B = Black W = White G = Grey

FALCON FIRE

LED WALLPACK
50W | 4837 LUMENS | REPLACES 175W

ORDER NUMBER: **L-FF50-DZ4**



KEY BENEFITS

UL wet listed die-cast aluminum construction with tempered glass lens or borosilicate glass reflectors, complete with stainless steel hardware. Mounts to standard 4 inch square electrical junction boxes. Alternate junction box mounting possible via universal mounting ring. Ingress resistant gasket included.

- Same foot print as traditional HID fixtures
- Premium brand LEDs (Phillips® chips depending on SKU) and YG® driver technology
- Dimming option available
- Precision die-cast Aluminum
- Wet location rated fixture for outdoor use
- Chip and fade resistant powder coat finish in any color
- Precision prismatic refractor
- Industrial grade, Button-type photocell.

APPLICATIONS

Ideal for driveways adjacent to buildings and outside warehousing

CERTIFICATIONS

• DLC 4.1 Premium • cUL-us Listed



* Please refer to the DLC QPL website for the latest and most complete information at www.designlights.org/QPL


PRODUCT PERFORMANCE

SYSTEM WATTAGE	LED WATTAGE	LUMENS	LP/W	CRI	REPLACES (MH)
50W	45W	4837 lm	98 lm/w	≥80	175W


PRODUCT SUMMARY

EFFICACY	>98 lm/w
LED CHIP	Premium brand LEDs (Phillips® chips depending on SKU)
CCT	4000K
DRIVER	Dimmable LED power supplies, Current can be adjusted The 0-10V Dimming type is continuous, The product can dim to 10%
DRIVER EFFICIENCY	>85%
DIMENSIONS	14.2 x 11.4 x 9.1
WEIGHT	12.12 lbs
STANDARD LIFETIME	Design minimum 75,000 hours
STANDARD WARRANTY	5 Years
WATER PROOFING GRADE	IP65

PRODUCT DIMENSIONS

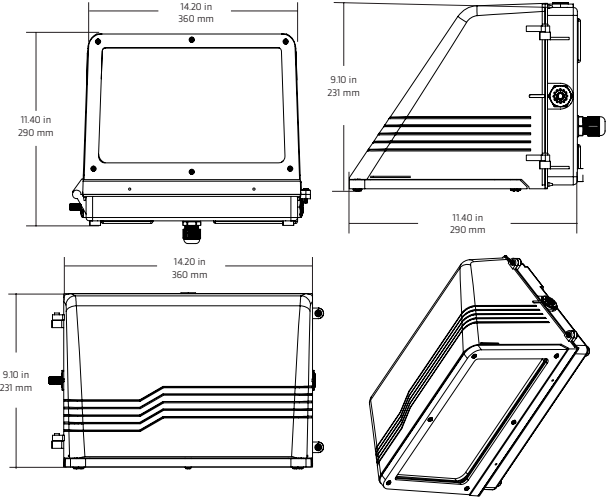

PRODUCT PHOTOMETRY

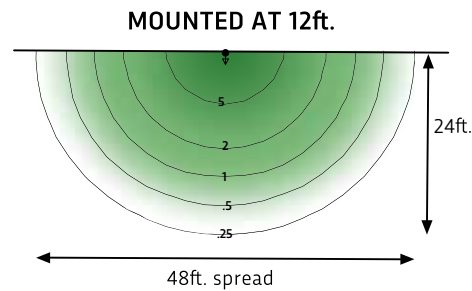

PRODUCT SPECIFICATIONS & VARIATIONS

BODY TYPE	SYSTEM WATTS	CCT	VOLTS	DIMMING OPTIONS	ELECTRICAL PHOTOCELL	HOUSING FINISH
FF	50	4	U	D	P	Z
L-FF Falcon Fire	50 = 50W	4 = 4000k	U = 120-277V	D = Dimming	P = Photocell N = None	Z = Bronze V = Silver B = Black W = White G = Grey

FALCON FIRE

LED WALLPACK
70W | 6239 LUMENS | REPLACES 200W

ORDER NUMBER: **L-FF70-4UD-P-Z**



KEY BENEFITS

UL wet listed die-cast aluminum construction with tempered glass lens or borosilicate glass reflectors, complete with stainless steel hardware. Mounts to standard 4 inch square electrical junction boxes. Alternate junction box mounting possible via universal mounting ring. Ingress resistant gasket included.

- Same foot print as traditional HID fixtures
- Premium brand LEDs (Phillips® chips depending on SKU) and YG® driver technology
- Dimming option available
- Precision die-cast Aluminum
- Wet location rated fixture for outdoor use
- Chip and fade resistant powder coat finish in any color
- Precision prismatic refractor
- Industrial grade, Button-type photocell.

APPLICATIONS

Ideal for driveways adjacent to buildings and outside warehousing

CERTIFICATIONS

• DLC 4.1 Premium • cUL-us Listed



* Please refer to the DLC QPL website for the latest and most complete information at www.designlights.org/QPL


PRODUCT PERFORMANCE

SYSTEM WATTAGE	LED WATTAGE	LUMENS	LP/W	CRI	REPLACES (MH)
70W	62W	6239 lm	92 lm/w	≥80	200W


PRODUCT SUMMARY

EFFICACY	>92 lm/w
LED CHIP	Premium brand LEDs (Phillips® chips depending on SKU)
CCT	4000K
DRIVER	Dimmable LED power supplies, Current can be adjusted The 0-10V Dimming type is continuous, The product can dim to 10%
DRIVER EFFICIENCY	>85%
DIMENSIONS	14.2 x 11.4 x 9.1
WEIGHT	12.12 lbs
STANDARD LIFETIME	Design minimum 75,000 hours
STANDARD WARRANTY	5 Years
WATER PROOFING GRADE	IP65

PRODUCT DIMENSIONS

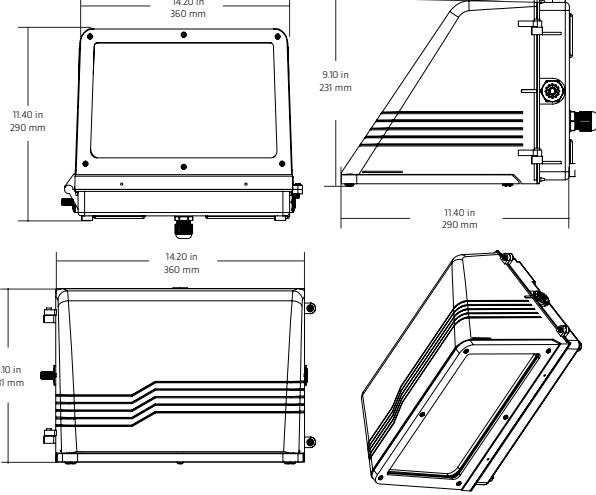

PRODUCT PHOTOMETRY

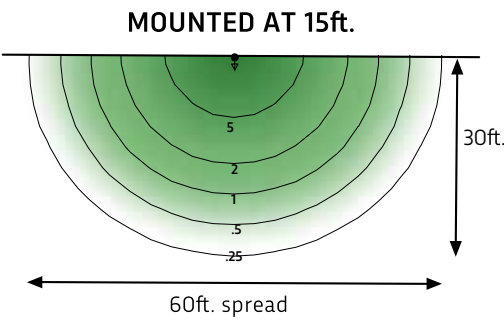

PRODUCT SPECIFICATIONS & VARIATIONS

BODY TYPE	SYSTEM WATTS	CCT	VOLTS	DIMMING OPTIONS	ELECTRICAL PHOTOCELL	HOUSING FINISH
FF	70	4	U	D	P	Z
L-FF Falcon Fire	70 = 70W	4 = 4000k	U = 120-277V	D = Dimming	P = Photocell N = None	Z = Bronze V = Silver B = Black W = White G = Grey

FALCON FIRE



LED WALLPACK
100W | 10426 LUMENS | REPLACES 250W

ORDER NUMBER: **L-FF100-DZ4**



KEY BENEFITS

UL wet listed die-cast aluminum construction with tempered glass lens or borosilicate glass reflectors, complete with stainless steel hardware. Mounts to standard 4 inch square electrical junction boxes. Alternate junction box mounting possible via universal mounting ring. Ingress resistant gasket included.

- Same foot print as traditional HID fixtures • Premium brand LEDs (Phillips® chips depending on SKU) and YG® driver technology • Dimming option available
- Precision die-cast Aluminum • Wet location rated fixture for outdoor use • Chip and fade resistant powder coat finish in any color • Precision prismatic refractor
- Industrial grade, Button-type photocell.

APPLICATIONS

Ideal for driveways adjacent to buildings and outside warehousing

CERTIFICATIONS

• DLC 4.1 Premium • cUL-us Listed



* Please refer to the DLC QPL website for the latest and most complete information at www.designlights.org/QPL


PRODUCT PERFORMANCE

SYSTEM WATTAGE	LED WATTAGE	LUMENS	LP/W	CRI	REPLACES (MH)
100W	90W	10426 lm	105 lm/w	≥80	250W


PRODUCT SUMMARY

EFFICACY	>105 lm/w
LED CHIP	Premium brand LEDs (Phillips® chips depending on SKU)
CCT	4000K
DRIVER	Dimmable LED power supplies, Current can be adjusted The 0-10V Dimming type is continuous, The product can dim to 10%
DRIVER EFFICIENCY	>85%
DIMENSIONS	18.5 x 13.7 x 9.1
WEIGHT	20.94 lbs
STANDARD LIFETIME	Design minimum 75,000 hours
STANDARD WARRANTY	5 Years
WATER PROOFING GRADE	IP65

PRODUCT DIMENSIONS

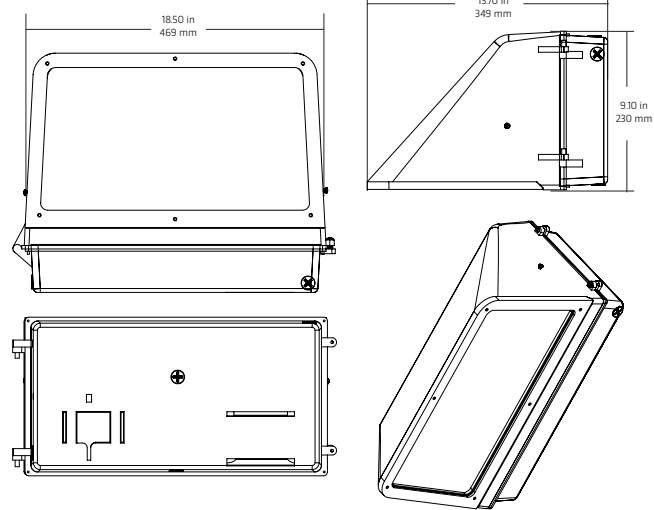

PRODUCT PHOTOMETRY

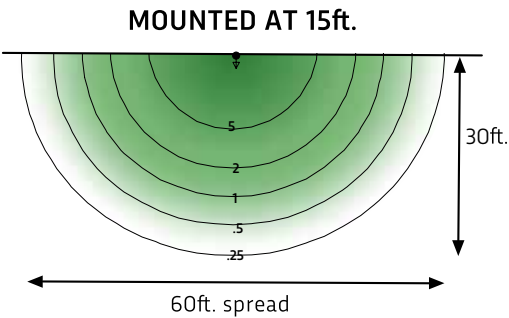

TARPON

LED WALLPACK
35W | 3346 LUMENS | REPLACES 150W

ORDER NUMBER: **L-TA35-4UD-P-Z**



KEY BENEFITS

UL wet listed die-cast aluminum construction with tempered glass lens complete with stainless steel hardware. Mounts to standard 4 inch square electrical junction boxes. Alternate junction box mounting possible via universal mounting ring. Ingress resistant gasket included.

- Architectural style with great performance
- Premium brand LEDs (Phillips® chips depending on SKU) and YG® driver technology
- Dimming option available
- Precision die cast aluminum
- Wet location rated fixture for outdoor use
- Chip and fade resistant powder coat finish in any color
- Industrial grade, Standard button Photocell
- Easy installation with hands free mounting
- Dark sky compliant

APPLICATIONS

Ideal for driveways adjacent to buildings and outside warehousing

CERTIFICATIONS

• DLC 4.1 Premium • cUL-us Listed



* Please refer to the DLC QPL website for the latest and most complete information at www.designlights.org/QPL


PRODUCT PERFORMANCE

SYSTEM WATTAGE	LED WATTAGE	LUMENS	LP/W	CRI	REPLACES (MH)
35W	30W	3346 lm	101 lm/w	≥80	150W


PRODUCT SUMMARY

EFFICACY	>101 lm/w
LED CHIP	Premium brand LEDs (Phillips® chips depending on SKU)
CCT	4000K
DRIVER	Dimmable LED power supplies, Current can be adjusted The 0-10V Dimming type is continuous, The product can dim to 10%
DRIVER EFFICIENCY	>85%
DIMENSIONS	18.1 x 9.1 x 7.1
WEIGHT	13 lbs
STANDARD LIFETIME	Design minimum 75,000 hours
STANDARD WARRANTY	5 Years
WATER PROOFING GRADE	IP65

PRODUCT DIMENSIONS

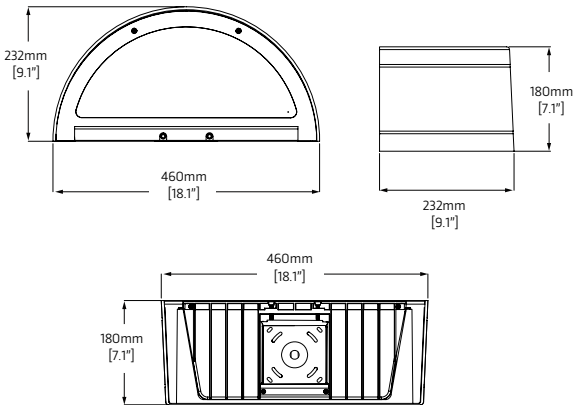

PRODUCT PHOTOMETRY

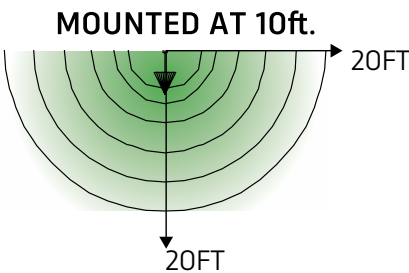

PRODUCT SPECIFICATIONS & VARIATIONS

BODY TYPE	SYSTEM WATTS	CCT	VOLTS	DIMMING OPTIONS	ELECTRICAL PHOTOCELL	HOUSING FINISH
TA	35	4	U	D	P	Z
L-TA Tarpon	35 = 35W	4 = 4000k	U = 120-277V	D = Dimming	P = Photocell N = None	Z = Bronze V = Silver B = Black W = White G = Grey

TARPON

LED WALLPACK
50W | 5127 LUMENS | REPLACES 175W

ORDER NUMBER: **L-TA50-DZ4**



KEY BENEFITS

UL wet listed die-cast aluminum construction with tempered glass lens complete with stainless steel hardware. Mounts to standard 4 inch square electrical junction boxes. Alternate junction box mounting possible via universal mounting ring. Ingress resistant gasket included.

• Architectural style with great performance • Premium brand LEDs (Phillips® chips depending on SKU) and YG® driver technology • Dimming option available • Precision die cast aluminum • Wet location rated fixture for outdoor use • Chip and fade resistant powder coat finish in any color • Industrial grade, Standard button Photocell • Easy installation with hands free mounting • Dark sky compliant

APPLICATIONS

Ideal for driveways adjacent to buildings and outside warehousing

CERTIFICATIONS

• DLC 4.1 Premium • cUL-us Listed



* Please refer to the DLC QPL website for the latest and most complete information at www.designlights.org/QPL


PRODUCT PERFORMANCE

SYSTEM WATTAGE	LED WATTAGE	LUMENS	LP/W	CRI	REPLACES (MH)
50W	45W	5127 lm	104 lm/w	≥80	175W

PRODUCT SUMMARY


EFFICACY	>104 lm/w
LED CHIP	Premium brand LEDs (Phillips® chips depending on SKU)
CCT	4000K
DRIVER	Dimmable LED power supplies, Current can be adjusted The 0-10V Dimming type is continuous, The product can dim to 10%
DRIVER EFFICIENCY	>85%
DIMENSIONS	18.1 x 9.1 x 7.1
WEIGHT	13 lbs
STANDARD LIFETIME	Design minimum 75,000 hours
STANDARD WARRANTY	5 Years
WATER PROOFING GRADE	IP65

PRODUCT DIMENSIONS

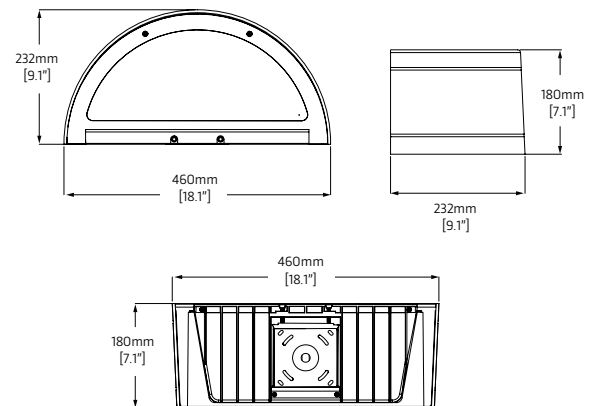

PRODUCT PHOTOMETRY

MOUNTED AT 12ft.

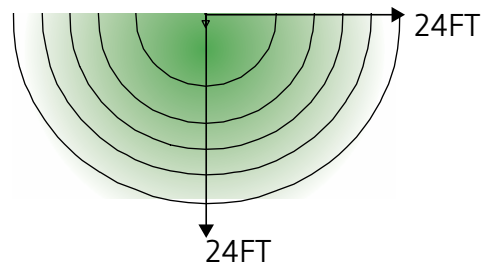

PRODUCT SPECIFICATIONS & VARIATIONS

BODY TYPE	SYSTEM WATTS	CCT	VOLTS	DIMMING OPTIONS	ELECTRICAL PHOTOCELL	HOUSING FINISH
TA	50	4	U	D	P	Z
L-TA Tarpon	50 = 50W	4 = 4000k	U = 120-277V	D = Dimming	P = Photocell N = None	Z = Bronze V = Silver B = Black W = White G = Grey

TARPON

LED WALLPACK
70W | 6596 LUMENS | REPLACES 250W

ORDER NUMBER: **L-TA70-4UD-P-Z**



KEY BENEFITS

UL wet listed die-cast aluminum construction with tempered glass lens complete with stainless steel hardware. Mounts to standard 4 inch square electrical junction boxes. Alternate junction box mounting possible via universal mounting ring. Ingress resistant gasket included.

- Architectural style with great performance
- Premium brand LEDs (Phillips® chips depending on SKU) and YG® driver technology
- Dimming option available
- Precision die cast aluminum
- Wet location rated fixture for outdoor use
- Chip and fade resistant powder coat finish in any color
- Industrial grade, Standard button Photocell
- Easy installation with hands free mounting
- Dark sky compliant

APPLICATIONS

Ideal for driveways adjacent to buildings and outside warehousing

CERTIFICATIONS

• DLC 4.1 Premium • cUL-us Listed



* Please refer to the DLC QPL website for the latest and most complete information at www.designlights.org/QPL


PRODUCT PERFORMANCE

SYSTEM WATTAGE	LED WATTAGE	LUMENS	LP/W	CRI	REPLACES (MH)
70W	62W	6596 lm	99 lm/w	≥80	250W

PRODUCT SUMMARY


EFFICACY	>99 lm/w
LED CHIP	Premium brand LEDs (Phillips® chips depending on SKU)
CCT	4000K
DRIVER	Dimmable LED power supplies, Current can be adjusted The 0-10V Dimming type is continuous, The product can dim to 10%
DRIVER EFFICIENCY	>85%
DIMENSIONS	18.1 x 9.1 x 7.1
WEIGHT	13 lbs
STANDARD LIFETIME	Design minimum 75,000 hours
STANDARD WARRANTY	5 Years
WATER PROOFING GRADE	IP65

PRODUCT DIMENSIONS

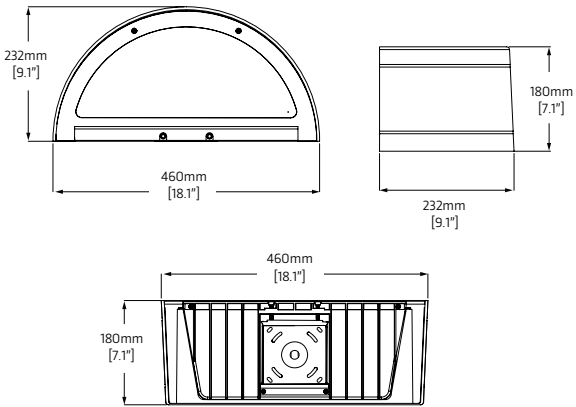

PRODUCT PHOTOMETRY

MOUNTED AT 12ft.

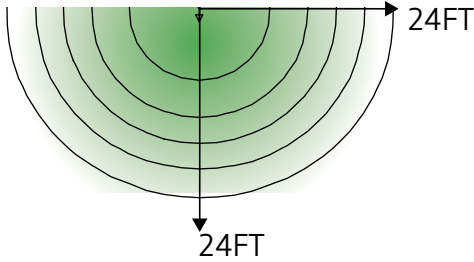

PRODUCT SPECIFICATIONS & VARIATIONS

BODY TYPE	SYSTEM WATTS	CCT	VOLTS	DIMMING OPTIONS	ELECTRICAL PHOTOCELL	HOUSING FINISH
TA	70	4	U	D	P	Z
L-TA Tarpon	70 = 70W	4 = 4000k	U = 120-277V	D = Dimming	P = Photocell N = None	Z = Bronze V = Silver B = Black W = White G = Grey

CATALINA



LED WALLPACK
30W | 3418 LUMENS | REPLACES 100W

ORDER NUMBER: **L-CA30-4UD-P-Z**



KEY BENEFITS

UL wet listed die-cast aluminum construction with a frosted UV stabilized poly carbonate diffuser lens, completed with stainless steel hardware. Mounts to standard 4 inch square electrical junction boxes. Alternate junction box mounting possible via universal mounting ring. Ingress resistant gasket included. Aesthetic curved design • Citizen® COB LED's and YG® driver technology • Dimming option available • Polycarbonate with aluminum backplate • Wall mount (ADA compliant, OVL500 only) • Wet location rated fixture for outdoor use • Chip and fade resistant powder coat finish in any color • Frosted UV stabilized poly carbonate Diffuser • Industrial grade Photocell intergraded • Easy installation with hands free mounting

APPLICATIONS

Ideal for driveways adjacent to buildings and outside warehousing



CERTIFICATIONS

• DLC 4.1 Premium • cUL-us Listed



* Please refer to the DLC QPL website for the latest and most complete information at www.designlights.org/QPL


PRODUCT PERFORMANCE

SYSTEM WATTAGE	LED WATTAGE	LUMENS	LP/W	CRI	REPLACES (MH)
30W	27W	3418 lm	114 lm/w	≥80	100W


PRODUCT SUMMARY

EFFICACY	>114 lm/w
LED CHIP	Citizen COB LED's
CCT	4000K
DRIVER	Dimmable LED power supplies, Current can be adjusted The 0-10V Dimming type is continuous, The product can dim to 10%
DRIVER EFFICIENCY	>85%
DIMENSIONS	11.76 x 9.05 x 4.27
WEIGHT	5.29 lbs
STANDARD LIFETIME	Design minimum 75,000 hours
STANDARD WARRANTY	5 Years
WATER PROOFING GRADE	IP65

PRODUCT DIMENSIONS

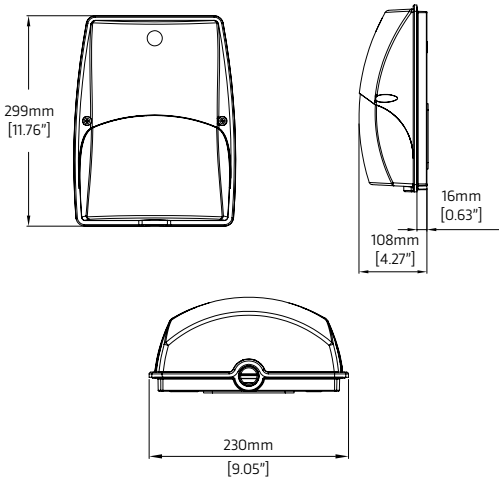

PRODUCT PHOTOMETRY

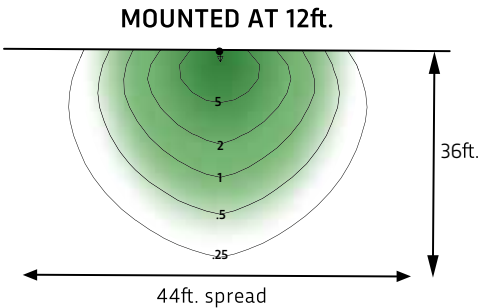

PRODUCT SPECIFICATIONS & VARIATIONS

BODY TYPE	SYSTEM WATTS	CCT	VOLTS	DIMMING OPTIONS	ELECTRICAL PHOTOCELL	HOUSING FINISH
CA	30	4	U	D	P	Z
L-CA Catalina	30 = 30W	4 = 4000k	U = 120-277V	D = Dimming	P = Photocell N = None	Z = Bronze V = Silver B = Black W = White G = Grey

CATALINA

LED WALLPACK
10W | 1168 LUMENS | REPLACES 50W

ORDER NUMBER: **L-CA10-4UD-P-Z**



KEY BENEFITS

UL wet listed die-cast aluminum construction with a frosted UV stabilized poly carbonate diffuser lens, completed with stainless steel hardware. Mounts to standard 4 inch square electrical junction boxes. Alternate junction box mounting possible via universal mounting ring. Ingress resistant gasket included. Aesthetic curved design • Citizen® COB LED's and YG® driver technology • Dimming option available • Polycarbonate with aluminum backplate • Wall mount (ADA compliant, OVL500 only) • Wet location rated fixture for outdoor use • Chip and fade resistant powder coat finish in any color • Frosted UV stabilized poly carbonate Diffuser • Industrial grade Photocell intergraded • Easy installation with hands free mounting

APPLICATIONS

Ideal for driveways adjacent to buildings and outside warehousing



CERTIFICATIONS

• DLC 4.1 Premium • cUL-us Listed



* Please refer to the DLC QPL website for the latest and most complete information at www.designlights.org/QPL


PRODUCT PERFORMANCE

SYSTEM WATTAGE	LED WATTAGE	LUMENS	LP/W	CRI	REPLACES (MH)
10W	9W	1168 lm	117 lm/w	≥80	50W


PRODUCT SUMMARY

EFFICACY	>117 lm/w
LED CHIP	Citizen COB LED's
CCT	4000K
DRIVER	Dimmable LED power supplies, Current can be adjusted The 0-10V Dimming type is continuous, The product can dim to 10%
DRIVER EFFICIENCY	>85%
DIMENSIONS	8.25 x 6.35 x 3.03
WEIGHT	1.76 lbs
STANDARD LIFETIME	Design minimum 75,000 hours
STANDARD WARRANTY	5 Years
WATER PROOFING GRADE	IP65

PRODUCT DIMENSIONS

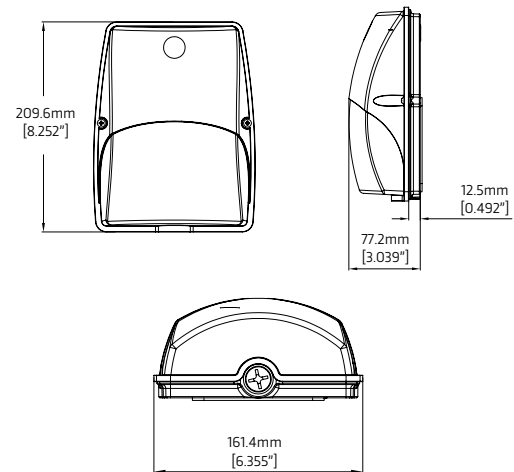

PRODUCT PHOTOMETRY

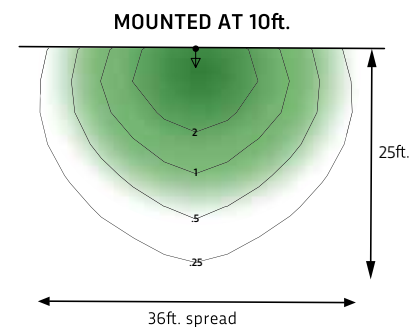

PRODUCT SPECIFICATIONS & VARIATIONS

BODY TYPE	SYSTEM WATTS	CCT	VOLTS	DIMMING OPTIONS	ELECTRICAL PHOTOCELL	HOUSING FINISH
CA	10	4	U	D	P	Z
L-CA Catalina	10 = 10W	4 = 4000k	U = 120-277V	D = Dimming	P = Photocell N = None	Z = Bronze V = Silver B = Black W = White G = Grey

CATALINA



LED WALLPACK
15W | 1652 LUMENS | REPLACES 50W



ORDER NUMBER: **L-CA15-4UD-P-Z**

KEY BENEFITS

UL wet listed die-cast aluminum construction with a frosted UV stabilized poly carbonate diffuser lens, completed with stainless steel hardware. Mounts to standard 4 inch square electrical junction boxes. Alternate junction box mounting possible via universal mounting ring. Ingress resistant gasket included. Aesthetic curved design • Citizen® COB LED's and YG® driver technology • Dimming option available • Polycarbonate with aluminum backplate • Wall mount (ADA compliant, OVL500 only) • Wet location rated fixture for outdoor use • Chip and fade resistant powder coat finish in any color • Frosted UV stabilized poly carbonate Diffuser • Industrial grade Photocell intergraded • Easy installation with hands free mounting

APPLICATIONS

Ideal for driveways adjacent to buildings and outside warehousing



CERTIFICATIONS

• DLC 4.1 Premium • cUL-us Listed



* Please refer to the DLC QPL website for the latest and most complete information at www.designlights.org/QPL


PRODUCT PERFORMANCE

SYSTEM WATTAGE	LED WATTAGE	LUMENS	LP/W	CRI	REPLACES (MH)
15W	14W	1652 lm	110 lm/w	≥80	50W

PRODUCT SUMMARY


EFFICACY	>110 lm/w
LED CHIP	Citizen COB LED's
CCT	4000K
DRIVER	Dimmable LED power supplies, Current can be adjusted The 0-10V Dimming type is continuous, The product can dim to 10%
DRIVER EFFICIENCY	>85%
DIMENSIONS	8.25x6.35x3.03
WEIGHT	1.76 lbs
STANDARD LIFETIME	Design minimum 75,000 hours
STANDARD WARRANTY	5 Years
WATER PROOFING GRADE	IP65

PRODUCT DIMENSIONS

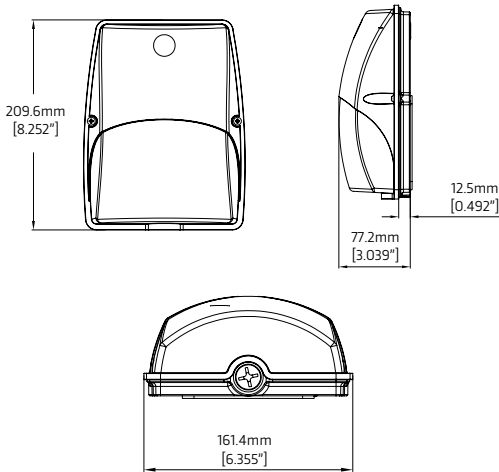

PRODUCT PHOTOMETRY

MOUNTED AT 10ft.

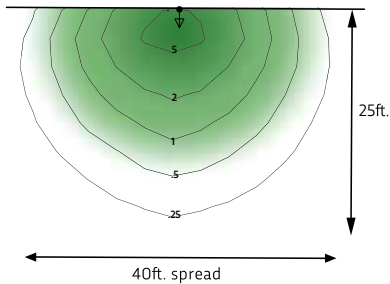

PRODUCT SPECIFICATIONS & VARIATIONS

BODY TYPE	SYSTEM WATTS	CCT	VOLTS	DIMMING OPTIONS	ELECTRICAL PHOTOCELL	HOUSING FINISH
CA	15	4	U	D	P	Z
L-CA Catalina	15 = 15W	4 = 4000k	U = 120-277V	D = Dimming	P = Photocell N = None	Z = Bronze V = Silver B = Black W = White G = Grey

CATALINA

LED WALLPACK
20W | 2205 LUMENS | REPLACES 50W

ORDER NUMBER: **L-CA20-4UD-P-Z**



KEY BENEFITS

UL wet listed die-cast aluminum construction with a frosted UV stabilized poly carbonate diffuser lens, completed with stainless steel hardware. Mounts to standard 4 inch square electrical junction boxes. Alternate junction box mounting possible via universal mounting ring. Ingress resistant gasket included. Aesthetic curved design • Citizen® COB LED's and YG® driver technology • Dimming option available • Polycarbonate with aluminum backplate • Wall mount (ADA compliant, OVL500 only) • Wet location rated fixture for outdoor use • Chip and fade resistant powder coat finish in any color • Frosted UV stabilized poly carbonate Diffuser • Industrial grade Photocell intergraded • Easy installation with hands free mounting

APPLICATIONS

Ideal for driveways adjacent to buildings and outside warehousing



CERTIFICATIONS

• DLC 4.1 Premium • cUL-us Listed



* Please refer to the DLC QPL website for the latest and most complete information at www.designlights.org/QPL


PRODUCT PERFORMANCE

SYSTEM WATTAGE	LED WATTAGE	LUMENS	LP/W	CRI	REPLACES (MH)
20W	18W	2205 lm	110 lm/w	≥80	50W

PRODUCT SUMMARY


EFFICACY	>110 lm/w
LED CHIP	Citizen COB LED's
CCT	4000K
DRIVER	Dimmable LED power supplies, Current can be adjusted The 0-10V Dimming type is continuous, The product can dim to 10%
DRIVER EFFICIENCY	>85%
DIMENSIONS	8.25 x 6.35 x 3.03
WEIGHT	1.76 lbs
STANDARD LIFETIME	Design minimum 75,000 hours
STANDARD WARRANTY	5 Years
WATER PROOFING GRADE	IP65

PRODUCT DIMENSIONS

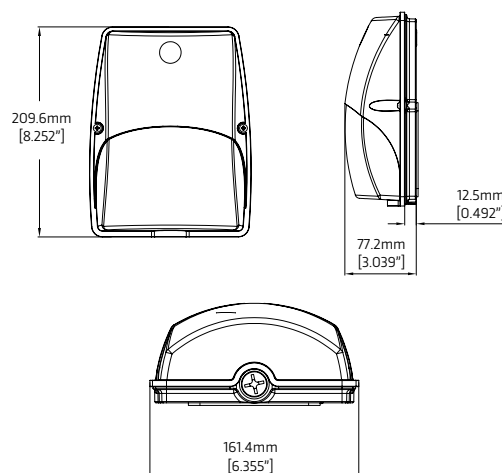

PRODUCT PHOTOMETRY

MOUNTED AT 10ft.

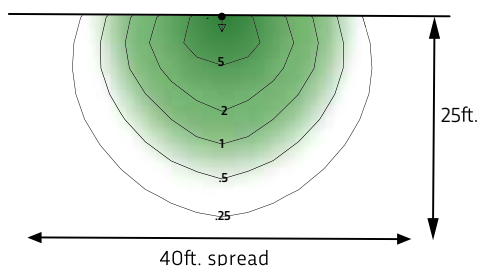

PRODUCT SPECIFICATIONS & VARIATIONS

BODY TYPE	SYSTEM WATTS	CCT	VOLTS	DIMMING OPTIONS	ELECTRICAL PHOTOCELL	HOUSING FINISH
CA	20	4	U	D	P	Z
L-CA Catalina	20 = 20W	4 = 4000k	U = 120-277V	D = Dimming	P = Photocell N = None	Z = Bronze V = Silver B = Black W = White G = Grey

FLOOD LIGHTS

VOYAGER

LED FLOOD LIGHT
14W | 1540 LUMENS | REPLACES 70W

ORDER NUMBER: **L-V014-4UD-1N-P-K-Z**



KEY BENEFITS

UL wet listed die-cast aluminum construction with tempered glass lens complete with stainless steel hardware. Wide and narrow beam spreads available • Citizen® COB LED's and YG® driver technology • Dimming option available • Precision die cast • Trunnion and Knuckle bracket mounting • IP65 rated fixture for outdoor use • Chip and fade resistant powder coat finish in any color • Highly efficient optics system • Superior thermal management and heat dissipation. • Industrial grade, Standard button Photocell

APPLICATIONS

Ideal for driveways adjacent to buildings and outside warehousing

CERTIFICATIONS

• DLC 4.1 Premium • cUL-us Listed



* Please refer to the DLC QPL website for the latest and most complete info www.designlights.org/QPL


PRODUCT PERFORMANCE

SYSTEM WATTAGE	LED WATTAGE	LUMENS	LP/W	CRI	REPLACES (MH)
14W	13W	1540 lm	110 lm/w	≥80	70W

PRODUCT SUMMARY


EFFICACY	>110 lm/w
LED CHIP	Citizen COB LED's
CCT	4000K
DRIVER	Dimmable LED power supplies, Current can be adjusted The 0-10V Dimming type is continuous, The product can dim to 10%
DRIVER EFFICIENCY	>85%
DIMENSIONS	10.55in x 6.08in x 8.24in
WEIGHT	7.6 lbs
STANDARD LIFETIME	Design minimum 75,000 hours
STANDARD WARRANTY	5 Years
WATER PROOFING GRADE	IP65

PRODUCT DIMENSIONS

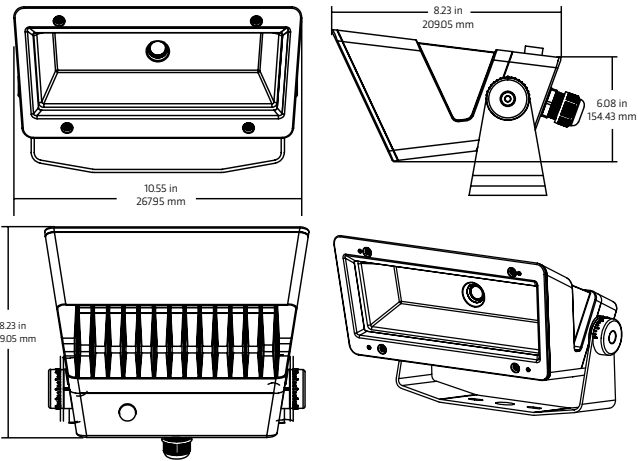

PRODUCT PHOTOMETRY

MOUNTED AT 10ft.

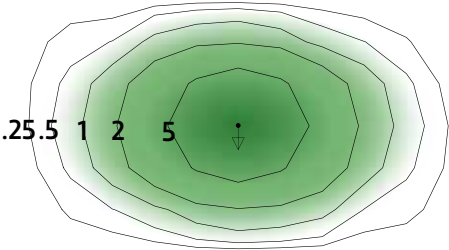

PRODUCT SPECIFICATIONS & VARIATIONS

BODY TYPE	SYSTEM WATTS	CCT	VOLTAGE	DIMMING OPTIONS	ELECTRICAL OPTICS	ELECTRICAL PHOTOCELL	MOUNTING	HOUSING FINISH
L-VO	14	4	U	D	1N	P	K	Z
L-VO Voyager	14 = 14W	4=4000K	U = 120-277V	D = Dimming	1N = NEMA 1 (18°) 2N = NEMA 2 (36°) WB = Wide Beam	P = Photocell N = None	K = Knuckle T = Trunnion	Z = Bronze V = Silver B = Black W = White G = Grey

VOYAGER

LED FLOOD LIGHT
20W | 2198 LUMENS | REPLACES 70W

ORDER NUMBER: **L-VO20-4UD-1N-P-K-Z**



KEY BENEFITS

UL wet listed die-cast aluminum construction with tempered glass lens complete with stainless steel hardware. Wide and narrow beam spreads available • Citizen® COB LED's and YG® driver technology • Dimming option available • Precision die cast • Trunnion and Knuckle bracket mounting • IP65 rated fixture for outdoor use • Chip and fade resistant powder coat finish in any color • Highly efficient optics system • Superior thermal management and heat dissipation. • Industrial grade, Standard button Photocell

APPLICATIONS

Ideal for driveways adjacent to buildings and outside warehousing

CERTIFICATIONS

• DLC 4.1 Premium • cUL-us Listed



* Please refer to the DLC QPL website for the latest and most complete info www.designlights.org/QPL


PRODUCT PERFORMANCE

SYSTEM WATTAGE	LED WATTAGE	LUMENS	LP/W	CRI	REPLACES (MH)
20W	18W	2198 lm	110 lm/w	≥80	70W

PRODUCT SUMMARY


EFFICACY	>110 lm/w
LED CHIP	Citizen COB LED's
CCT	4000K
DRIVER	Dimmable LED power supplies, Current can be adjusted The 0-10V Dimming type is continuous, The product can dim to 10%
DRIVER EFFICIENCY	>85%
DIMENSIONS	10.55in x 6.08in x 8.24in
WEIGHT	7.6 lbs
STANDARD LIFETIME	Design minimum 75,000 hours
STANDARD WARRANTY	5 Years
WATER PROOFING GRADE	IP65

PRODUCT DIMENSIONS

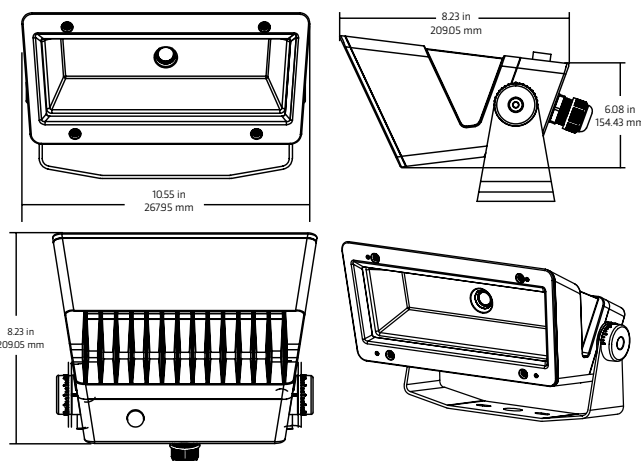

PRODUCT PHOTOMETRY

MOUNTED AT 10ft.

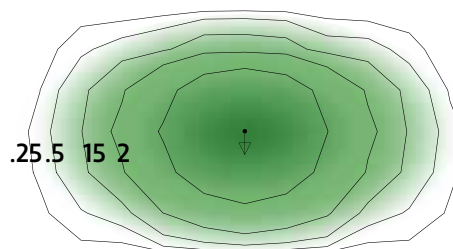

PRODUCT SPECIFICATIONS & VARIATIONS

BODY TYPE	SYSTEM WATTS	CCT	VOLTAGE	DIMMING OPTIONS	ELECTRICAL OPTICS	ELECTRICAL PHOTOCELL	MOUNTING	HOUSING FINISH
L-VO	20	4	U	D	1N	P	K	Z
L-VO Voyager	20 = 20W	4=4000K	U = 120-277V	D = Dimming	1N = NEMA 1 (18°) 2N = NEMA 2 (36°) WB = Wide Beam	P = Photocell N = None	K = Knuckle T = Trunnion	Z = Bronze V = Silver B = Black W = White G = Grey

VOYAGER

LED FLOOD LIGHT
28W | 3693 LUMENS | REPLACES 100W

ORDER NUMBER: **L-VO28-4UD-1N-P-K-Z**



KEY BENEFITS

UL wet listed die-cast aluminum construction with tempered glass lens complete with stainless steel hardware. Wide and narrow beam spreads available • Citizen® COB LED's and YG® driver technology • Dimming option available • Precision die cast • Trunnion and Knuckle bracket mounting • IP65 rated fixture for outdoor use • Chip and fade resistant powder coat finish in any color • Highly efficient optics system • Superior thermal management and heat dissipation. • Industrial grade, Standard button Photocell

APPLICATIONS

Ideal for driveways adjacent to buildings and outside warehousing

CERTIFICATIONS

• DLC 4.1 Premium • cUL-us Listed



* Please refer to the DLC QPL website for the latest and most complete info www.designlights.org/QPL


PRODUCT PERFORMANCE

SYSTEM WATTAGE	LED WATTAGE	LUMENS	LP/W	CRI	REPLACES (MH)
28W	26W	3693 lm	132 lm/w	≥70	100W


PRODUCT SUMMARY

EFFICACY	>132 lm/w
LED CHIP	Citizen COB LED's
CCT	4000K
DRIVER	Dimmable LED power supplies, Current can be adjusted The 0-10V Dimming type is continuous, The product can dim to 10%
DRIVER EFFICIENCY	>85%
DIMENSIONS	10.55in x 6.08in x 8.24in
WEIGHT	7.6 lbs
STANDARD LIFETIME	Design minimum 75,000 hours
STANDARD WARRANTY	5 Years
WATER PROOFING GRADE	IP65

PRODUCT DIMENSIONS

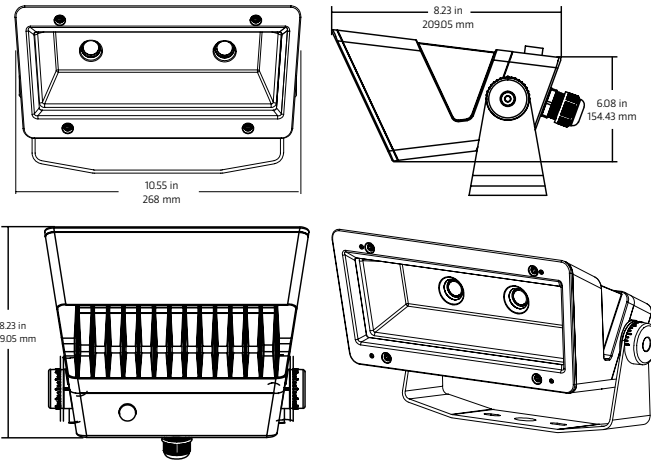

PRODUCT PHOTOMETRY



PRODUCT SPECIFICATIONS & VARIATIONS

BODY TYPE	SYSTEM WATTS	CCT	VOLTAGE	DIMMING OPTIONS	ELECTRICAL OPTICS	ELECTRICAL PHOTOCELL	MOUNTING	HOUSING FINISH
L-VO	28	4	U	D	1N	P	K	Z
L-VO Voyager	28 = 28W	4=4000K	U = 120-277V	D = Dimming	1N = NEMA 1 (18°) 2N = NEMA 2 (36°) WB = Wide Beam	P = Photocell N = None	K = Knuckle T = Trunnion	Z = Bronze V = Silver B = Black W = White G = Grey

VOYAGER

LED FLOOD LIGHT
52W | 7111 LUMENS | REPLACES 150W

ORDER NUMBER: **L-V052-4UD-1N-P-K-Z**



KEY BENEFITS

UL wet listed die-cast aluminum construction with tempered glass lens complete with stainless steel hardware. Wide and narrow beam spreads available • Citizen® COB LED's and YG® driver technology • Dimming option available • Precision die cast • Trunnion and Knuckle bracket mounting • IP65 rated fixture for outdoor use • Chip and fade resistant powder coat finish in any color • Highly efficient optics system • Superior thermal management and heat dissipation. • Industrial grade, Standard button Photocell

APPLICATIONS

Ideal for driveways adjacent to buildings and outside warehousing

CERTIFICATIONS

• **DLC 4.1 Premium** • **cUL-us Listed**



* Please refer to the DLC QPL website for the latest and most complete info www.designlights.org/QPL


PRODUCT PERFORMANCE

SYSTEM WATTAGE	LED WATTAGE	LUMENS	LP/W	CRI	REPLACES (MH)
52W	46W	7111 lm	137 lm/w	≥70	150W


PRODUCT SUMMARY

EFFICACY	>137 lm/w
LED CHIP	Citizen COB LED's
CCT	4000K
DRIVER	Dimmable LED power supplies, Current can be adjusted The 0-10V Dimming type is continuous, The product can dim to 10%
DRIVER EFFICIENCY	>85%
DIMENSIONS	13.50in x 5.31in x 9.39in
WEIGHT	1079 lbs
STANDARD LIFETIME	Design minimum 75,000 hours
STANDARD WARRANTY	5 Years
WATER PROOFING GRADE	IP65

PRODUCT DIMENSIONS

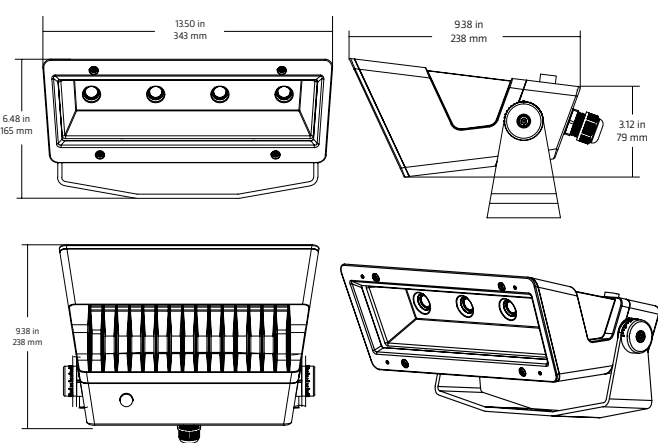

PRODUCT PHOTOMETRY



PRODUCT SPECIFICATIONS & VARIATIONS

BODY TYPE	SYSTEM WATTS	CCT	VOLTAGE	DIMMING OPTIONS	ELECTRICAL OPTICS	ELECTRICAL PHOTOCELL	MOUNTING	HOUSING FINISH
L-V0	52	4	U	D	1N	P	K	Z
L-V0 Voyager	52 = 52W	4=4000K	U = 120-277V	D = Dimming	1N = NEMA 1 (18°) 2N = NEMA 2 (36°) WB = Wide Beam	P = Photocell N = None	K = Knuckle T = Trunnion	Z = Bronze V = Silver B = Black W = White G = Grey



NIGHT CRAWLER

LED FLOOD LIGHT
40W | 4908 LUMENS | REPLACES 150W

ORDER NUMBER: **L-NC40-DZ4**



KEY BENEFITS

Die-cast (grade of aluminum) Aluminum with tempered glass lens, utilizing stainless steel hardware.

- Citizen® COB LED's and YG® driver technology
- Dimming option available
- Precision die cast
- IP66 rated fixture for outdoor use
- Chip and fade resistant powder coat finish in any color
- Industrial grade, Standard button Photocell
- 6X6 beam angle optics
- Multiple mounting configurations to fit any application

APPLICATIONS

Designed for architectural & property lighting. Energy efficient & durable providing uniform lighting with no hotspots

CERTIFICATIONS

• DLC 4.1 Premium • cUL-us Listed



* Please refer to the DLC QPL website for the latest and most complete info www.designlights.org/QPL


PRODUCT PERFORMANCE

SYSTEM WATTAGE	LED WATTAGE	LUMENS	LP/W	CRI	REPLACES (MH)
40W	36W	4908 lm	129 lm/w	≥70	150W


PRODUCT SUMMARY

EFFICACY	>129 lm/w
LED CHIP	Citizen COB LED's
CCT	4000K
DRIVER	Dimmable LED power supplies, Current can be adjusted The 0-10V Dimming type is continuous, The product can dim to 10%
DRIVER EFFICIENCY	>85%
DIMENSIONS	10.62in x 6.31in x 6.90in
WEIGHT	8.81 lbs
STANDARD LIFETIME	Design minimum 75,000 hours
STANDARD WARRANTY	5 Years
WATER PROOFING GRADE	IP66

PRODUCT DIMENSIONS

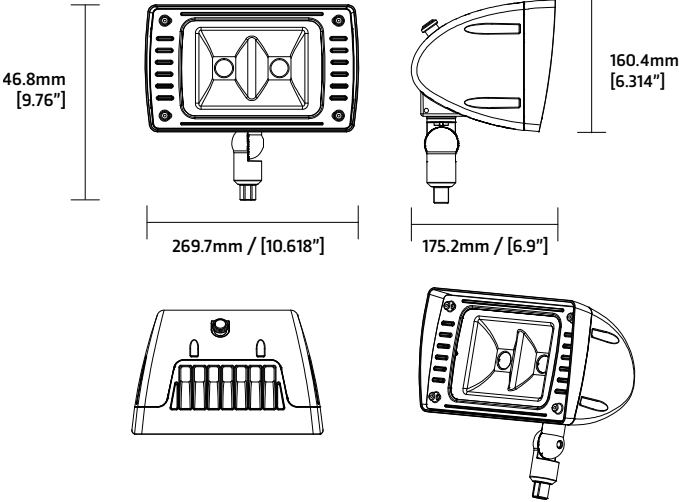

PRODUCT PHOTOMETRY



PRODUCT SPECIFICATIONS & VARIATIONS

BODY TYPE	SYSTEM WATTS	CCT	VOLTAGE	DIMMING OPTIONS	ELECTRICAL OPTICS	ELECTRICAL PHOTOCELL	MOUNTING	HOUSING FINISH
L-NC	40	4	U	D	W6	P	K	Z
L-NC Night Crawler	40 = 40W	4=4000K	U = 120-277V	D = Dimming	W6 = Flood/Wide	P = Photocell N = None	K = Knuckle T = Trunnion S = Slipfitter W = Wall Mount	Z = Bronze V = Silver B = Black W = White G = Grey



IP66

NIGHT CRAWLER

LED FLOOD LIGHT
50W | 6547 LUMENS | REPLACES 150W

ORDER NUMBER: **L-NC50-4UD-W6-P-K-Z**



KEY BENEFITS

Die-cast (grade of aluminum) Aluminum with tempered glass lens, utilizing stainless steel hardware.

• Citizen® COB LED's and YG® driver technology • Dimming option available • Precision die cast • IP66 rated fixture for outdoor use • Chip and fade resistant powder coat finish in any color • Industrial grade, Standard button Photocell • 6X6 beam angle optics • Multiple mounting configurations to fit any application

APPLICATIONS

Designed for architectural & property lighting. Energy efficient & durable providing uniform lighting with no hotspots

CERTIFICATIONS

• DLC 4.1 Premium • cUL-us Listed



* Please refer to the DLC QPL website for the latest and most complete info www.designlights.org/QPL


PRODUCT PERFORMANCE

SYSTEM WATTAGE	LED WATTAGE	LUMENS	LP/W	CRI	REPLACES (MH)
50W	45W	6547 lm	120 lm/w	≥70	150W

PRODUCT SUMMARY


EFFICACY	>120 lm/w
LED CHIP	Citizen COB LED's
CCT	4000K
DRIVER	Dimmable LED power supplies, Current can be adjusted The 0-10V Dimming type is continuous, The product can dim to 10%
DRIVER EFFICIENCY	>85%
DIMENSIONS	10.62in x 6.31in x 6.90in
WEIGHT	8.81 lbs
STANDARD LIFETIME	Design minimum 75,000 hours
STANDARD WARRANTY	5 Years
WATER PROOFING GRADE	IP66

PRODUCT DIMENSIONS

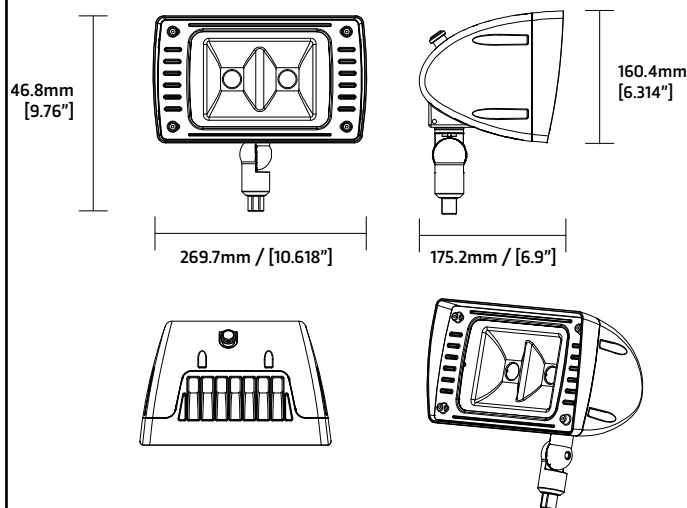

PRODUCT PHOTOMETRY

MOUNTED AT 30ft.



PRODUCT SPECIFICATIONS & VARIATIONS

BODY TYPE	SYSTEM WATTS	CCT	VOLTAGE	DIMMING OPTIONS	ELECTRICAL OPTICS	ELECTRICAL PHOTOCELL	MOUNTING	HOUSING FINISH
L-NC	50	4	U	D	W6	P	K	Z
L-NC Night Crawler	50 = 50W	4=4000K	U = 120-277V	D = Dimming	W6 = Flood/Wide	P = Photocell N = None	K = Knuckle T = Trunnion S = Slipfitter W = Wall Mount	Z = Bronze V = Silver B = Black W = White G = Grey

NIGHT CRAWLER

LED FLOOD LIGHT
78W | 9518 LUMENS | REPLACES 250W

ORDER NUMBER: **L-NC78-DZ4**



KEY BENEFITS

Die-cast (grade of aluminum) Aluminum with tempered glass lens, utilizing stainless steel hardware.

• Citizen® COB LED's and YG® driver technology • Dimming option available • Precision die cast • IP66 rated fixture for outdoor use • Chip and fade resistant powder coat finish in any color • Industrial grade, Standard button Photocell • 6X6 beam angle optics • Multiple mounting configurations to fit any application

APPLICATIONS

Designed for architectural & property lighting. Energy efficient & durable providing uniform lighting with no hotspots

CERTIFICATIONS

• DLC 4.1 Premium • cUL-us Listed



* Please refer to the DLC QPL website for the latest and most complete info www.designlights.org/QPL


PRODUCT PERFORMANCE

SYSTEM WATTAGE	LED WATTAGE	LUMENS	LP/W	CRI	REPLACES (MH)
78W	68W	9518 lm	121 lm/w	≥70	250W

PRODUCT SUMMARY


EFFICACY	>121 lm/w
LED CHIP	Citizen COB LED's
CCT	4000K
DRIVER	Dimmable LED power supplies, Current can be adjusted The 0-10V Dimming type is continuous, The product can dim to 10%
DRIVER EFFICIENCY	>85%
DIMENSIONS	12.08in x 7.48in x 8.14in
WEIGHT	17.62 lbs
STANDARD LIFETIME	Design minimum 75,000 hours
STANDARD WARRANTY	5 Years
WATER PROOFING GRADE	IP66

PRODUCT DIMENSIONS

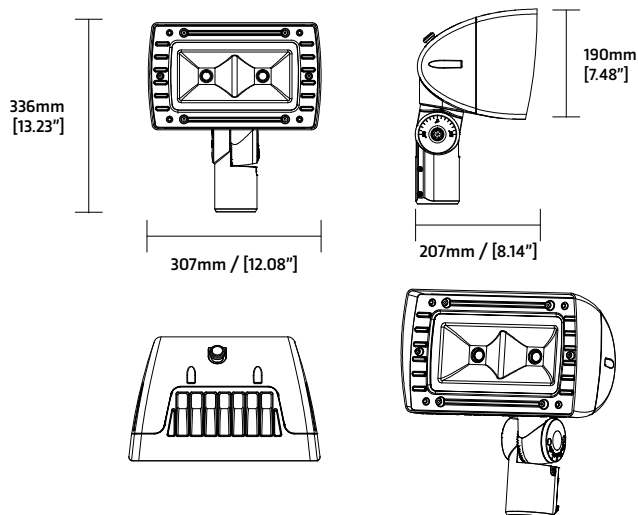

PRODUCT PHOTOMETRY

MOUNTED AT 30ft.



PRODUCT SPECIFICATIONS & VARIATIONS

BODY TYPE	SYSTEM WATTS	CCT	VOLTAGE	DIMMING OPTIONS	ELECTRICAL OPTICS	ELECTRICAL PHOTOCELL	MOUNTING	HOUSING FINISH
L-NC	78	4	U	D	W6	P	K	Z
L-NC Night Crawler	78 = 78W	4=4000K	U = 120-277V	D = Dimming	W6 = Flood/Wide	P = Photocell N = None	K = Knuckle T = Trunnion S = Slipfitter W = Wall Mount	Z = Bronze V = Silver B = Black W = White G = Grey

NIGHT CRAWLER

LED FLOOD LIGHT
100W | 13584 LUMENS | REPLACES 320W

ORDER NUMBER: **L-NC100-4UD-W6-P-K-Z**



KEY BENEFITS

Die-cast (grade of aluminum) Aluminum with tempered glass lens, utilizing stainless steel hardware.

• Citizen® COB LED's and YG® driver technology • Dimming option available • Precision die cast • IP66 rated fixture for outdoor use • Chip and fade resistant powder coat finish in any color • Industrial grade, Standard button Photocell • 6X6 beam angle optics • Multiple mounting configurations to fit any application

APPLICATIONS

Designed for architectural & property lighting. Energy efficient & durable providing uniform lighting with no hotspots

CERTIFICATIONS

• DLC 4.1 Premium • cUL-us Listed



* Please refer to the DLC QPL website for the latest and most complete info www.designlights.org/QPL


PRODUCT PERFORMANCE

SYSTEM WATTAGE	LED WATTAGE	LUMENS	LP/W	CRI	REPLACES (MH)
100W	90W	13584 lm	120 lm/w	≥80	320W

PRODUCT SUMMARY


EFFICACY	>120 lm/w
LED CHIP	Citizen COB LED's
CCT	4000K
DRIVER	Dimmable LED power supplies, Current can be adjusted The 0-10V Dimming type is continuous, The product can dim to 10%
DRIVER EFFICIENCY	>85%
DIMENSIONS	15.71in x 9.49in x 10.00in
WEIGHT	26.43 lbs
STANDARD LIFETIME	Design minimum 75,000 hours
STANDARD WARRANTY	5 Years
WATER PROOFING GRADE	IP66

PRODUCT DIMENSIONS

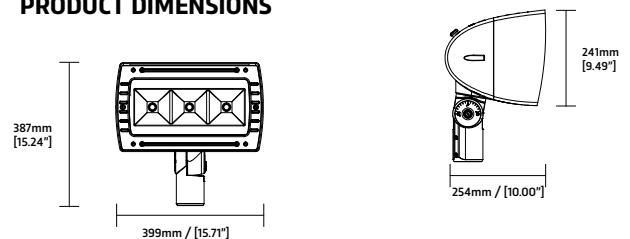

PRODUCT PHOTOMETRY

MOUNTED AT 30ft.



PRODUCT SPECIFICATIONS & VARIATIONS

BODY TYPE	SYSTEM WATTS	CCT	VOLTAGE	DIMMING OPTIONS	ELECTRICAL OPTICS	ELECTRICAL PHOTOCELL	MOUNTING	HOUSING FINISH
L-NC	100	4	U	D	W6	P	K	Z
L-NC Night Crawler	100 = 100W	4=4000K	U = 120-277V	D = Dimming	W6 = Flood/Wide	P = Photocell N = None	K = Knuckle T = Trunnion S = Slipfitter W = Wall Mount	Z = Bronze V = Silver B = Black W = White G = Grey

NIGHT CRAWLER

LED FLOOD LIGHT
114W | 14756 LUMENS | REPLACES 320W

ORDER NUMBER: **L-NC114-DZ4**



KEY BENEFITS

Die-cast (grade of aluminum) Aluminum with tempered glass lens, utilizing stainless steel hardware.
 • Citizen® COB LED's and YG® driver technology • Dimming option available • Precision die cast • IP66 rated fixture for outdoor use • Chip and fade resistant powder coat finish in any color • Industrial grade, Standard button Photocell • 6X6 beam angle optics • Multiple mounting configurations to fit any application

APPLICATIONS

Designed for architectural & property lighting. Energy efficient & durable providing uniform lighting with no hotspots

CERTIFICATIONS

• DLC 4.1 Premium • cUL-us Listed



* Please refer to the DLC QPL website for the latest and most complete info www.designlights.org/QPL


PRODUCT PERFORMANCE

SYSTEM WATTAGE	LED WATTAGE	LUMENS	LP/W	CRI	REPLACES (MH)
114W	100W	14756 lm	129 lm/w	≥80	320W

PRODUCT SUMMARY


EFFICACY	>129 lm/w
LED CHIP	Citizen COB LED's
CCT	4000K
DRIVER	Dimmable LED power supplies, Current can be adjusted The 0-10V Dimming type is continuous, The product can dim to 10%
DRIVER EFFICIENCY	>85%
DIMENSIONS	15.71in x 9.49in x 10.00in
WEIGHT	26.43 lbs
STANDARD LIFETIME	Design minimum 75,000 hours
STANDARD WARRANTY	5 Years
WATER PROOFING GRADE	IP66

PRODUCT DIMENSIONS

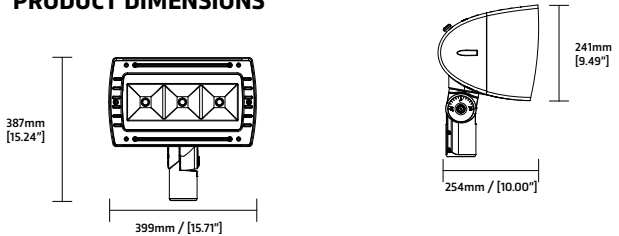

PRODUCT PHOTOMETRY

MOUNTED AT 30ft.



PRODUCT SPECIFICATIONS & VARIATIONS

BODY TYPE	SYSTEM WATTS	CCT	VOLTAGE	DIMMING OPTIONS	ELECTRICAL OPTICS	ELECTRICAL PHOTOCELL	MOUNTING	HOUSING FINISH
L-NC	114	4	U	D	W6	P	K	Z
L-NC Night Crawler	114 = 114W	4=4000K	U = 120-277V	D = Dimming	W6 = Flood/Wide	P = Photocell N = None	K = Knuckle T = Trunnion S = Slipfitter W = Wall Mount	Z = Bronze V = Silver B = Black W = White G = Grey

NIGHT CRAWLER

LED FLOOD LIGHT
135W | 16609 LUMENS | REPLACES 400W

ORDER NUMBER: **L-NC135-4UD-W6-P-K-Z**



KEY BENEFITS

Die-cast (grade of aluminum) Aluminum with tempered glass lens, utilizing stainless steel hardware.
 • Citizen® COB LED's and YG® driver technology • Dimming option available • Precision die cast • IP66 rated fixture for outdoor use • Chip and fade resistant powder coat finish in any color • Industrial grade, Standard button Photocell • 6X6 beam angle optics • Multiple mounting configurations to fit any application

APPLICATIONS

Designed for architectural & property lighting. Energy efficient & durable providing uniform lighting with no hotspots

CERTIFICATIONS

• DLC 4.1 Premium • cUL-us Listed



* Please refer to the DLC QPL website for the latest and most complete info www.designlights.org/QPL


PRODUCT PERFORMANCE

SYSTEM WATTAGE	LED WATTAGE	LUMENS	LP/W	CRI	REPLACES (MH)
135W	120W	16609 lm	137 lm/w	≥80	400W

PRODUCT SUMMARY


EFFICACY	>137 lm/w
LED CHIP	Citizen COB LED's
CCT	4000K
DRIVER	Dimmable LED power supplies, Current can be adjusted The 0-10V Dimming type is continuous, The product can dim to 10%
DRIVER EFFICIENCY	>85%
DIMENSIONS	15.71in x 9.49in x 10.00in
WEIGHT	26.43 lbs
STANDARD LIFETIME	Design minimum 75,000 hours
STANDARD WARRANTY	5 Years
WATER PROOFING GRADE	IP66

PRODUCT DIMENSIONS

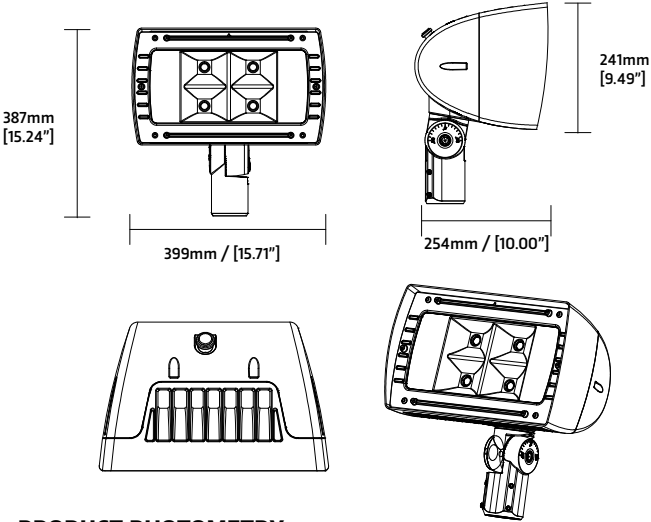

PRODUCT PHOTOMETRY

MOUNTED AT 15ft.



PRODUCT SPECIFICATIONS & VARIATIONS

BODY TYPE	SYSTEM WATTS	CCT	VOLTAGE	DIMMING OPTIONS	ELECTRICAL OPTICS	ELECTRICAL PHOTOCELL	MOUNTING	HOUSING FINISH
L-NC	135	4	U	D	W6	P	K	Z
L-NC Night Crawler	135 = 135W	4=4000K	U = 120-277V	D = Dimming	W6 = Flood/Wide	P = Photocell N = None	K = Knuckle T = Trunnion S = Slipfitter W = Wall Mount	Z = Bronze V = Silver B = Black W = White G = Grey

NIGHT CRAWLER

LED FLOOD LIGHT
20W | 2399 LUMENS | REPLACES 70W

ORDER NUMBER: **L-NC20-DZ4**



KEY BENEFITS

Die-cast (grade of aluminum) Aluminum with tempered glass lens, utilizing stainless steel hardware.

• Citizen® COB LED's and YG® driver technology • Dimming option available • Precision die cast • IP66 rated fixture for outdoor use • Chip and fade resistant powder coat finish in any color • Industrial grade, Standard button Photocell • 6X6 beam angle optics • Multiple mounting configurations to fit any application

APPLICATIONS

Designed for architectural & property lighting. Energy efficient & durable providing uniform lighting with no hotspots

CERTIFICATIONS

• DLC 4.1 Premium • cUL-us Listed



* Please refer to the DLC QPL website for the latest and most complete info www.designlights.org/QPL


PRODUCT PERFORMANCE

SYSTEM WATTAGE	LED WATTAGE	LUMENS	LP/W	CRI	REPLACES (MH)
20W	18W	2399 lm	115lm/w	≥70	70W

PRODUCT SUMMARY


EFFICACY	>115 lm/w
LED CHIP	Citizen COB LED's
CCT	4000K
DRIVER	Dimmable LED power supplies, Current can be adjusted The 0-10V Dimming type is continuous, The product can dim to 10%
DRIVER EFFICIENCY	>85%
DIMENSIONS	7.84in x 5.95in x 6.70in
WEIGHT	6.33 lbs
STANDARD LIFETIME	Design minimum 75,000 hours
STANDARD WARRANTY	5 Years
WATER PROOFING GRADE	IP66

PRODUCT DIMENSIONS

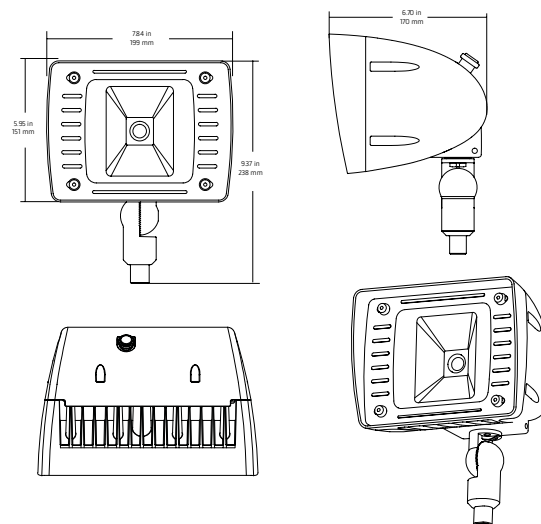

PRODUCT PHOTOMETRY

MOUNTED AT 15ft.

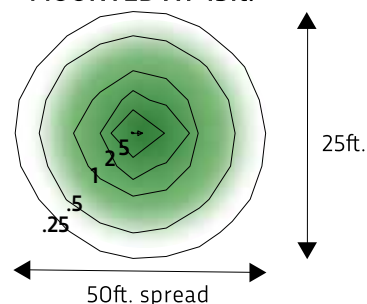

PRODUCT SPECIFICATIONS & VARIATIONS

BODY TYPE	SYSTEM WATTS	CCT	VOLTAGE	DIMMING OPTIONS	ELECTRICAL OPTICS	ELECTRICAL PHOTOCELL	MOUNTING	HOUSING FINISH
L-NC	20	4	U	D	W6	P	K	Z
L-NC Night Crawler	20 = 20W	4=4000K	U = 120-277V	D = Dimming	W6 = Flood/Wide	P = Photocell N = None	K = Knuckle T = Trunnion S = Slipfitter W = Wall Mount	Z = Bronze V = Silver B = Black W = White G = Grey

NIGHT CRAWLER

LED FLOOD LIGHT
152W | 18774 LUMENS | REPLACES 400W

ORDER NUMBER: **L-NC152-DZ4**



KEY BENEFITS

Die-cast (grade of aluminum) Aluminum with tempered glass lens, utilizing stainless steel hardware.

• Citizen® COB LED's and YG® driver technology • Dimming option available • Precision die cast • IP66 rated fixture for outdoor use • Chip and fade resistant powder coat finish in any color • Industrial grade, Standard button Photocell • 6X6 beam angle optics • Multiple mounting configurations to fit any application

APPLICATIONS

Designed for architectural & property lighting. Energy efficient & durable providing uniform lighting with no hotspots

CERTIFICATIONS

• DLC 4.1 Premium • cUL-us Listed



* Please refer to the DLC QPL website for the latest and most complete info www.designlights.org/QPL


PRODUCT PERFORMANCE

SYSTEM WATTAGE	LED WATTAGE	LUMENS	LP/W	CRI	REPLACES (MH)
152W	135W	18774 lm	121 lm/w	≥80	400W

PRODUCT SUMMARY


EFFICACY	>121 lm/w
LED CHIP	Citizen COB LED's
CCT	4000K
DRIVER	Dimmable LED power supplies, Current can be adjusted The 0-10V Dimming type is continuous, The product can dim to 10%
DRIVER EFFICIENCY	>85%
DIMENSIONS	15.71in x 9.49in x 10.00in
WEIGHT	26.43 lbs
STANDARD LIFETIME	Design minimum 75,000 hours
STANDARD WARRANTY	5 Years
WATER PROOFING GRADE	IP66

PRODUCT DIMENSIONS

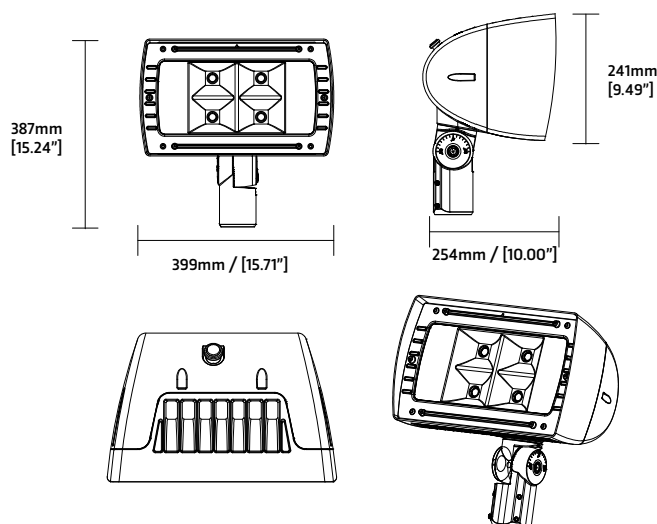

PRODUCT PHOTOMETRY

MOUNTED AT 30ft.



PRODUCT SPECIFICATIONS & VARIATIONS

BODY TYPE	SYSTEM WATTS	CCT	VOLTAGE	DIMMING OPTIONS	ELECTRICAL OPTICS	ELECTRICAL PHOTOCELL	MOUNTING	HOUSING FINISH
L-NC	152	4	U	D	W6	P	K	Z
L-NC Night Crawler	152 = 152W	4=4000K	U = 120-277V	D = Dimming	W6 = Flood/Wide	P = Photocell N = None	K = Knuckle T = Trunnion S = Slipfitter W = Wall Mount	Z = Bronze V = Silver B = Black W = White G = Grey

ASIMO

LED FLOOD LIGHT
300W | 32939 LUMENS | REPLACES 1000W

ORDER NUMBER: **L-AS300-4UD-N3-P-K-Z**



KEY BENEFITS

- Economic, versatile, high efficiency flood family, with Multiple mounting configurations to fit any application
- Mid-power LED chips and YG® driver technology
- Dimming option available
- Precision die cast • IP66 rated fixture for outdoor use
- Chip and fade resistant powder coat finish in any color
- Industrial grade, Standard button Photocell

APPLICATIONS

Designed for architectural & property lighting. Energy efficient & durable providing uniform lighting with no hotspots

CERTIFICATIONS

• DLC 4.1 Premium • cUL-us Listed



* Please refer to the DLC QPL website for the latest and most complete info www.designlights.org/QPL


PRODUCT PERFORMANCE

SYSTEM WATTAGE	LED WATTAGE	LUMENS	LP/W	CRI	REPLACES (MH)
300W	270W	32939 lm	108 lm/w	≥80	1000W


PRODUCT SUMMARY

EFFICACY	>108 lm/w
LED CHIP	Mid-power
CCT	4000K
DRIVER	Dimmable LED power supplies, Current can be adjusted The 0-10V Dimming type is continuous, The product can dim to 10%
DRIVER EFFICIENCY	>85%
DIMENSIONS	20.50in x 16.45in x 9.80in
WEIGHT	29 lbs
STANDARD LIFETIME	Design minimum 75,000 hours
STANDARD WARRANTY	5 Years
WATER PROOFING GRADE	IP66

PRODUCT DIMENSIONS

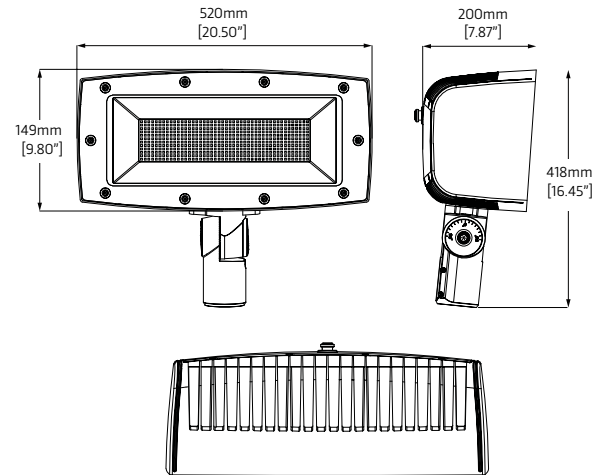

PRODUCT PHOTOMETRY



PRODUCT SPECIFICATIONS & VARIATIONS

BODY TYPE	SYSTEM WATTS	CCT	VOLTAGE	DIMMING OPTIONS	ELECTRICAL OPTICS	ELECTRICAL PHOTOCELL	MOUNTING	HOUSING FINISH
L-AS	300	4	U	D	W6	P	K	Z
L-AS Asimo	300 = 300W	4=4000K	U = 120-277V	D = Dimming	W6 = Flood/Wide	P = Photocell N = None	K = Knuckle T = Trunnion S = Slipfitter W = Wall Mount	Z = Bronze V = Silver B = Black W = White G = Grey

ASIMO

LED FLOOD LIGHT
150W | 16391 LUMENS | REPLACES 400W

ORDER NUMBER: **L-AS150-4UD-P-K-Z**



IP66



KEY BENEFITS

- Economic, versatile, high efficiency flood family, with Multiple mounting configurations to fit any application
- Mid-power LED chips and YG® driver technology
- Dimming option available
- Precision die cast
- IP66 rated fixture for outdoor use
- Chip and fade resistant powder coat finish in any color
- Industrial grade, Standard button Photocell

APPLICATIONS

Designed for architectural & property lighting. Energy efficient & durable providing uniform lighting with no hotspots

CERTIFICATIONS

• DLC 4.1 Premium • cUL-us Listed



* Please refer to the DLC QPL website for the latest and most complete info www.designlights.org/QPL


PRODUCT PERFORMANCE

SYSTEM WATTAGE	LED WATTAGE	LUMENS	LP/W	CRI	REPLACES (MH)
150W	133W	16391 lm	110 lm/w	≥80	400W


PRODUCT SUMMARY

EFFICACY	>110 lm/w
LED CHIP	Mid-power
CCT	4000K
DRIVER	Dimmable LED power supplies, Current can be adjusted The 0-10V Dimming type is continuous, The product can dim to 10%
DRIVER EFFICIENCY	>85%
DIMENSIONS	15.75in x 8.66in x 6.70in
WEIGHT	22.65 lbs
STANDARD LIFETIME	Design minimum 75,000 hours
STANDARD WARRANTY	5 Years
WATER PROOFING GRADE	IP66

PRODUCT DIMENSIONS

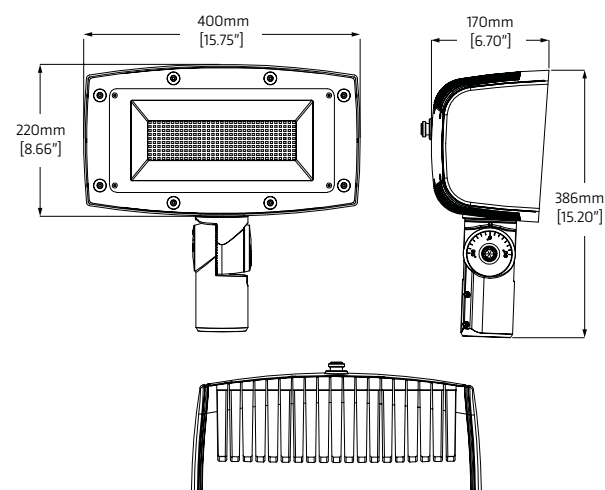

PRODUCT PHOTOMETRY

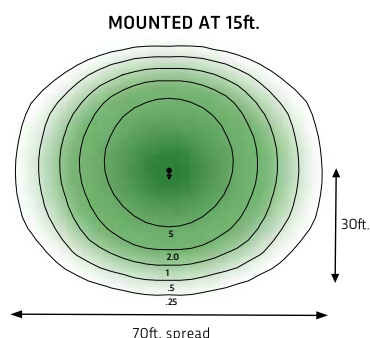

PRODUCT SPECIFICATIONS & VARIATIONS

BODY TYPE	SYSTEM WATTS	CCT	VOLTAGE	DIMMING OPTIONS	ELECTRICAL PHOTOCELL	MOUNTING	HOUSING FINISH
L-AS	150	4	U	D	P	K	Z
L-AS Asimo	150 = 150W	4 = 4000k	U = 120-277V	D = Dimming	P = Photocell N = None	K = Knuckle T = Trunnion S = Slipfitter W = Wall Mount	Z = Bronze V = Silver B = Black W = White G = Grey

ASIMO

LED FLOOD LIGHT
100W | 10859 LUMENS | REPLACES 250W

ORDER NUMBER: **L-AS100-4UD-P-K-Z**



KEY BENEFITS

- Economic, versatile, high efficiency flood family, with Multiple mounting configurations to fit any application
- Mid-power LED chips and YG® driver technology
- Dimming option available
- Precision die cast
- IP66 rated fixture for outdoor use
- Chip and fade resistant powder coat finish in any color
- Industrial grade, Standard button Photocell

APPLICATIONS

Designed for architectural & property lighting. Energy efficient & durable providing uniform lighting with no hotspots

CERTIFICATIONS

• DLC 4.1 Premium • cUL-us Listed



* Please refer to the DLC QPL website for the latest and most complete info www.designlights.org/QPL


PRODUCT PERFORMANCE

SYSTEM WATTAGE	LED WATTAGE	LUMENS	LP/W	CRI	REPLACES (MH)
100W	90W	10859 lm	109 lm/w	≥80	250W


PRODUCT SUMMARY

EFFICACY	>109 lm/w
LED CHIP	Mid-power
CCT	4000K
DRIVER	Dimmable LED power supplies, Current can be adjusted The 0-10V Dimming type is continuous, The product can dim to 10%
DRIVER EFFICIENCY	>85%
DIMENSIONS	12.70in x 7.87in x 6.30in
WEIGHT	16.25 lbs
STANDARD LIFETIME	Design minimum 75,000 hours
STANDARD WARRANTY	5 Years
WATER PROOFING GRADE	IP66

PRODUCT DIMENSIONS

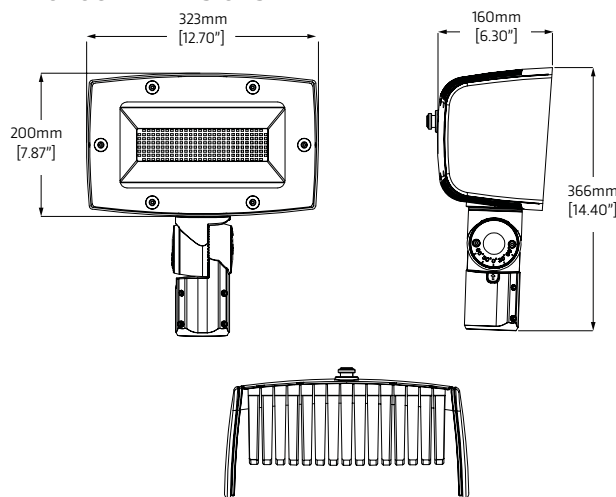

PRODUCT PHOTOMETRY



PRODUCT SPECIFICATIONS & VARIATIONS

BODY TYPE	SYSTEM WATTS	CCT	VOLTAGE	DIMMING OPTIONS	ELECTRICAL PHOTOCELL	MOUNTING	HOUSING FINISH
L-AS	100	4	U	D	P	K	Z
L-AS Asimo	100 = 100W	4 = 4000k	U = 120-277V	D = Dimming	P = Photocell N = None	K = Knuckle T = Trunnion S = Slipfitter W = Wall Mount	Z = Bronze V = Silver B = Black W = White G = Grey

ASIMO

LED FLOOD LIGHT
40W | 4107 LUMENS | REPLACES 150W

ORDER NUMBER: **L-AS40-4UD-P-K-Z**



IP66



KEY BENEFITS

- Economic, versatile, high efficiency flood family, with Multiple mounting configurations to fit any application
- Mid-power LED chips and YG® driver technology
- Dimming option available
- Precision die cast
- IP66 rated fixture for outdoor use
- Chip and fade resistant powder coat finish in any color
- Industrial grade, Standard button Photocell

APPLICATIONS

Designed for architectural & property lighting. Energy efficient & durable providing uniform lighting with no hotspots

CERTIFICATIONS

• DLC 4.1 Premium • cUL-us Listed



* Please refer to the DLC QPL website for the latest and most complete info www.designlights.org/QPL


PRODUCT PERFORMANCE

SYSTEM WATTAGE	LED WATTAGE	LUMENS	LP/W	CRI	REPLACES (MH)
40W	36W	4107 lm	102 lm/w	≥80	150W

PRODUCT SUMMARY


EFFICACY	>102 lm/w
LED CHIP	Mid-power
CCT	4000K
DRIVER	Dimmable LED power supplies, Current can be adjusted The 0-10V Dimming type is continuous, The product can dim to 10%
DRIVER EFFICIENCY	>85%
DIMENSIONS	10in x 6.26in x 4.72in
WEIGHT	6.55 lbs
STANDARD LIFETIME	Design minimum 75,000 hours
STANDARD WARRANTY	5 Years
WATER PROOFING GRADE	IP66

PRODUCT DIMENSIONS

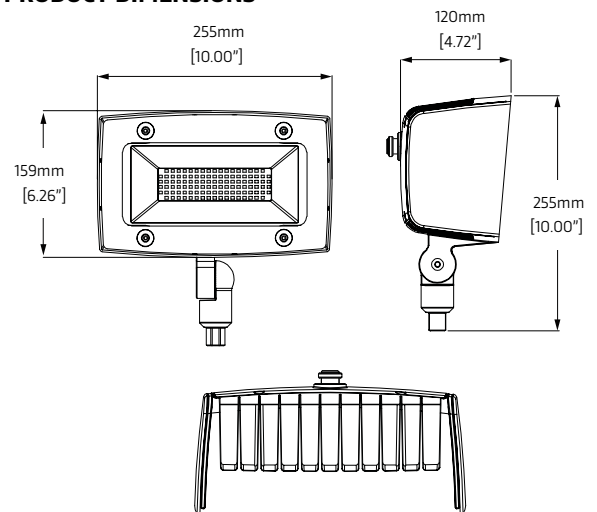

PRODUCT PHOTOMETRY

MOUNTED AT 12ft.

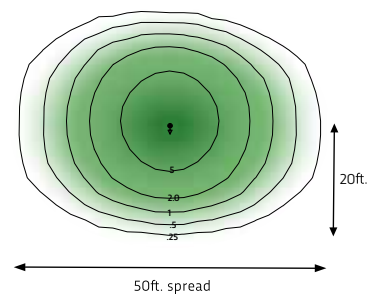

PRODUCT SPECIFICATIONS & VARIATIONS

BODY TYPE	SYSTEM WATTS	CCT	VOLTAGE	DIMMING OPTIONS	ELECTRICAL PHOTOCELL	MOUNTING	HOUSING FINISH
L-AS	40	4	U	D	P	K	Z
L-AS Asimo	40 = 40W	4 = 4000k	U = 120-277V	D = Dimming	P = Photocell N = None	K = Knuckle T = Trunnion S = Slipfitter W = Wall Mount	Z = Bronze V = Silver B = Black W = White G = Grey

ASIMO

LED FLOOD LIGHT
20W | 1981 LUMENS | REPLACES 70W

ORDER NUMBER: **L-AS20-4UD-P-K-Z**



IP66



KEY BENEFITS

- Economic, versatile, high efficiency flood family, with Multiple mounting configurations to fit any application
- Mid-power LED chips and YG® driver technology
- Dimming option available
- Precision die cast
- IP66 rated fixture for outdoor use
- Chip and fade resistant powder coat finish in any color
- Industrial grade, Standard button Photocell

APPLICATIONS

Designed for architectural & property lighting. Energy efficient & durable providing uniform lighting with no hotspots

CERTIFICATIONS

• DLC 4.1 Premium • cUL-us Listed



* Please refer to the DLC QPL website for the latest and most complete info www.designlights.org/QPL


PRODUCT PERFORMANCE

SYSTEM WATTAGE	LED WATTAGE	LUMENS	LP/W	CRI	REPLACES (MH)
20W	18W	1981 lm	100 lm/w	≥80	70W

PRODUCT SUMMARY


EFFICACY	>100 lm/w
LED CHIP	Mid-power
CCT	4000K
DRIVER	Dimmable LED power supplies, Current can be adjusted The 0-10V Dimming type is continuous, The product can dim to 10%
DRIVER EFFICIENCY	>85%
DIMENSIONS	8.86in x 7.77in x 5.10in
WEIGHT	4.55 lbs
STANDARD LIFETIME	Design minimum 75,000 hours
STANDARD WARRANTY	5 Years
WATER PROOFING GRADE	IP66

PRODUCT DIMENSIONS

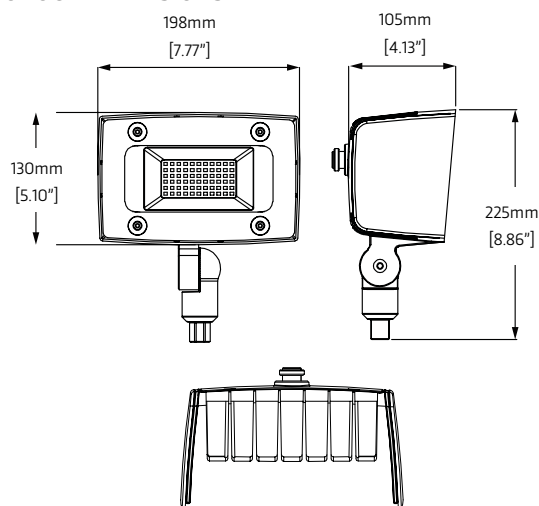

PRODUCT PHOTOMETRY

MOUNTED AT 10ft.

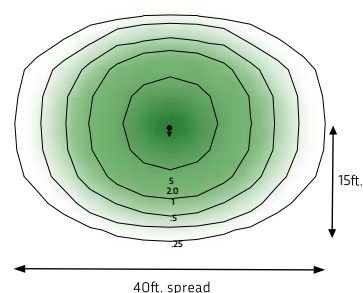

PRODUCT SPECIFICATIONS & VARIATIONS

BODY TYPE	SYSTEM WATTS	CCT	VOLTAGE	DIMMING OPTIONS	ELECTRICAL PHOTOCELL	MOUNTING	HOUSING FINISH
L-AS	20	4	U	D	P	K	Z
L-AS Asimo	20 = 20W	4 = 4000k	U = 120-277V	D = Dimming	P = Photocell N = None	K = Knuckle T = Trunnion S = Slipfitter W = Wall Mount	Z = Bronze V = Silver B = Black W = White G = Grey

IP66

ASIMO

LED FLOOD LIGHT
50W | 5007 LUMENS | REPLACES 150W

ORDER NUMBER: **L-AS50-4UD-P-K-Z**

KEY BENEFITS

• Economic, versatile, high efficiency flood family, with Multiple mounting configurations to fit any application • Mid-power LED chips and YG® driver technology • Dimming option available • Precision die cast • IP66 rated fixture for outdoor use • Chip and fade resistant powder coat finish in any color • Industrial grade, Standard button Photocell

APPLICATIONS

Designed for architectural & property lighting. Energy efficient & durable providing uniform lighting with no hotspots

CERTIFICATIONS

• DLC 4.1 Premium • cUL-us Listed



* Please refer to the DLC QPL website for the latest and most complete info www.designlights.org/QPL

PRODUCT PERFORMANCE

SYSTEM WATTAGE	LED WATTAGE	LUMENS	LP/W	CRI	REPLACES (MH)
50W	45W	5007 lm	101 lm/w	≥80	150W


PRODUCT SUMMARY

EFFICACY	>101 lm/w
LED CHIP	Mid-power
CCT	4000K
DRIVER	Dimmable LED power supplies, Current can be adjusted The 0-10V Dimming type is continuous, The product can dim to 10%
DRIVER EFFICIENCY	>85%
DIMENSIONS	10in x 6.26in x 4.72in
WEIGHT	6.55 lbs
STANDARD LIFETIME	Design minimum 75,000 hours
STANDARD WARRANTY	5 Years
WATER PROOFING GRADE	IP66

PRODUCT SPECIFICATIONS & VARIATIONS


BODY TYPE	SYSTEM WATTS	CCT	VOLTAGE	DIMMING OPTIONS	ELECTRICAL PHOTOCELL	MOUNTING	HOUSING FINISH
L-AS	50	4	U	D	P	K	Z
L-AS Asimo	50 = 50W	4 = 4000k	U = 120-277V	D = Dimming	P = Photocell N = None	K = Knuckle T = Trunnion S = Slipfitter W = Wall Mount	Z = Bronze V = Silver B = Black W = White G = Grey

PRODUCT DIMENSIONS

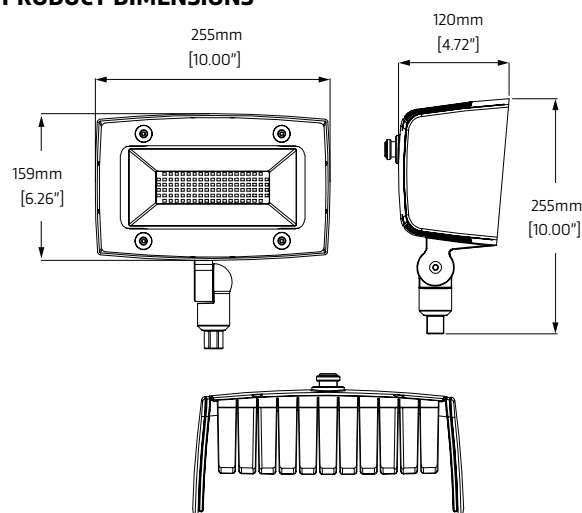

PRODUCT PHOTOMETRY

MOUNTED AT 12ft.

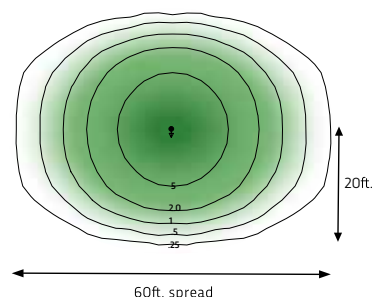

ASIMO

LED FLOOD LIGHT
30W | 3077 LUMENS | REPLACES 70W

ORDER NUMBER: **L-AS30-4UD-P-K-Z**

IP66



KEY BENEFITS

• Economic, versatile, high efficiency flood family, with Multiple mounting configurations to fit any application • Mid-power LED chips and YG® driver technology • Dimming option available • Precision die cast • IP66 rated fixture for outdoor use • Chip and fade resistant powder coat finish in any color • Industrial grade, Standard button Photocell

APPLICATIONS

Designed for architectural & property lighting. Energy efficient & durable providing uniform lighting with no hotspots

CERTIFICATIONS

• DLC 4.1 Premium • cUL-us Listed



* Please refer to the DLC QPL website for the latest and most complete info www.designlights.org/QPL


PRODUCT PERFORMANCE

SYSTEM WATTAGE	LED WATTAGE	LUMENS	LP/W	CRI	REPLACES (MH)
30W	27W	3077 lm	100 lm/w	≥80	70W

PRODUCT SUMMARY


EFFICACY	>100 lm/w
LED CHIP	Mid-power
CCT	4000K
DRIVER	Dimmable LED power supplies, Current can be adjusted The 0-10V Dimming type is continuous, The product can dim to 10%
DRIVER EFFICIENCY	>85%
DIMENSIONS	8.86in x 7.77in x 5.10in
WEIGHT	4.55 lbs
STANDARD LIFETIME	Design minimum 75,000 hours
STANDARD WARRANTY	5 Years
WATER PROOFING GRADE	IP66

PRODUCT DIMENSIONS

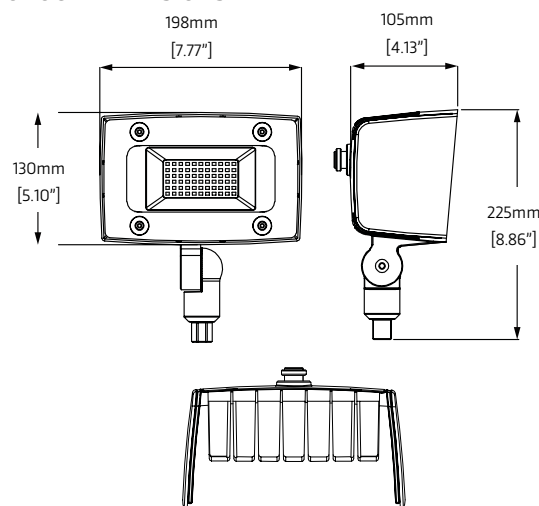

PRODUCT PHOTOMETRY

MOUNTED AT 12ft.

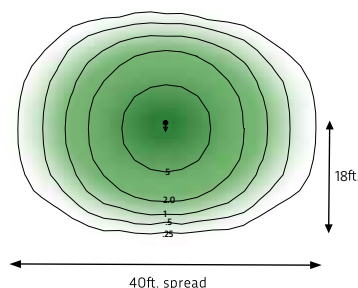

PRODUCT SPECIFICATIONS & VARIATIONS

BODY TYPE	SYSTEM WATTS	CCT	VOLTAGE	DIMMING OPTIONS	ELECTRICAL PHOTOCELL	MOUNTING	HOUSING FINISH
L-AS	50	4	U	D	P	K	Z
L-AS Asimo	50 = 50W	4 = 4000k	U = 120-277V	D = Dimming	P = Photocell N = None	K = Knuckle T = Trunnion S = Slipfitter W = Wall Mount	Z = Bronze V = Silver B = Black W = White G = Grey

TYPHOON



LED FLOOD LIGHT
50W | 5649 LUMENS | REPLACES 175W

ORDER NUMBER: **L-TY50-DZ4**

KEY BENEFITS

Die-cast (grade of aluminum) Aluminum with tempered glass lens, utilizing stainless steel hardware.

- Premium brand LEDs (Philips® chips depending on SKU) and YG® driver technology
- Dimming option available
- Precision die cast
- Industrial grade, Button-type photocell
- Wet location rated fixture for outdoor use
- Chip and fade resistant powder coat finish in any color

APPLICATIONS

Designed for architectural & property lighting. Energy efficient & durable providing uniform lighting with no hotspots

CERTIFICATIONS

• DLC 4.1 Premium • cUL-us Listed



* Please refer to the DLC QPL website for the latest and most complete info www.designlights.org/QPL


PRODUCT PERFORMANCE

SYSTEM WATTAGE	LED WATTAGE	LUMENS	LP/W	CRI	REPLACES (MH)
50W	45W	5649 lm	115 lm/w	≥80	175W


PRODUCT SUMMARY

EFFICACY	>115 lm/w
LED CHIP	Premium brand LEDs (Phillps® chips depending on SKU)
CCT	4000K
DRIVER	Dimmable LED power supplies, Current can be adjusted The 0-10V Dimming type is continuous, The product can dim to 10%
DRIVER EFFICIENCY	>85%
DIMENSIONS	10.3in x 9.1in x 7.2in
WEIGHT	8.26 lbs
STANDARD LIFETIME	Design minimum 75,000 hours
STANDARD WARRANTY	5 Years
WATER PROOFING GRADE	IP65

PRODUCT DIMENSIONS

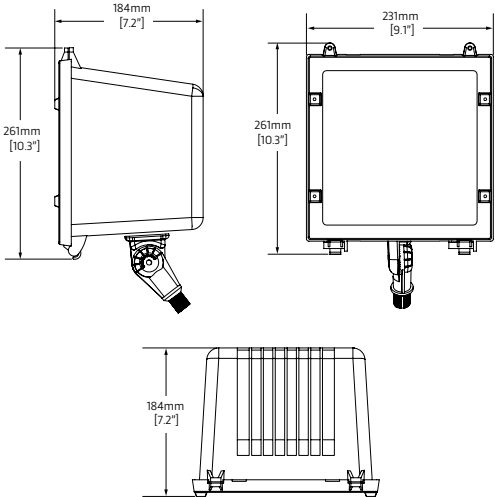

PRODUCT PHOTOMETRY



PRODUCT SPECIFICATIONS & VARIATIONS

BODY TYPE	SYSTEM WATTS	CCT	VOLTS	DIMMING OPTIONS	ELECTRICAL PHOTOCELL	MOUNTING	HOUSING FINISH
TY	50	4	U	D	P	S	Z
L-TY Typhoon	50 = 50W	4 = 4000k	U = 120-277V	D = Dimming	P = Photocell N = None	S = SlipfitterN T = Trunnion	Z = Bronze V = Silver B = Black W = White G = Grey

TYPHOON

LED FLOOD LIGHT
100W | 10475 LUMENS | REPLACES 250W

ORDER NUMBER: **L-TY100-DZ4**



KEY BENEFITS

Die-cast (grade of aluminum) Aluminum with tempered glass lens, utilizing stainless steel hardware.

- Premium brand LEDs (Philips® chips depending on SKU) and YG® driver technology
- Dimming option available
- Precision die cast
- Industrial grade, Button-type photocell
- Wet location rated fixture for outdoor use
- Chip and fade resistant powder coat finish in any color

APPLICATIONS

Designed for architectural & property lighting. Energy efficient & durable providing uniform lighting with no hotspots

CERTIFICATIONS

• DLC 4.1 Premium • cUL-us Listed



* Please refer to the DLC QPL website for the latest and most complete info www.designlights.org/QPL


PRODUCT PERFORMANCE

SYSTEM WATTAGE	LED WATTAGE	LUMENS	LP/W	CRI	REPLACES (MH)
100W	90W	10475 lm	105 lm/w	≥80	250W

PRODUCT SUMMARY


EFFICACY	>105 lm/w
LED CHIP	Premium brand LEDs (Phillips® chips depending on SKU)
CCT	4000K
DRIVER	Dimmable LED power supplies, Current can be adjusted The 0-10V Dimming type is continuous, The product can dim to 10%
DRIVER EFFICIENCY	>85%
DIMENSIONS	16.2in x 10.6in x 10.2in
WEIGHT	16.96lbs
STANDARD LIFETIME	Design minimum 75,000 hours
STANDARD WARRANTY	5 Years
WATER PROOFING GRADE	IP65

PRODUCT DIMENSIONS

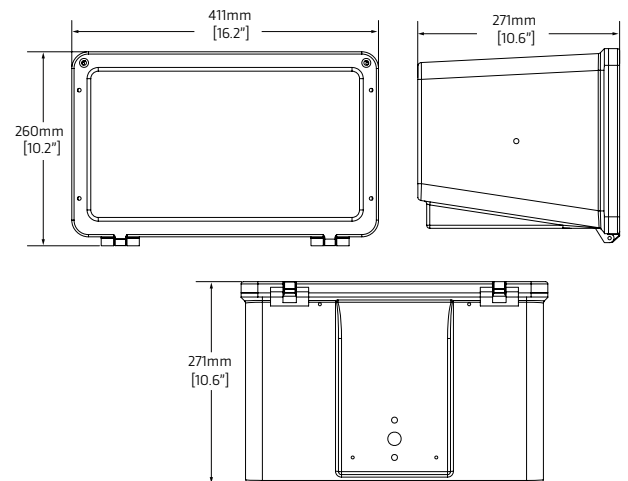

PRODUCT PHOTOMETRY

MOUNTED AT 15ft.



PRODUCT SPECIFICATIONS & VARIATIONS

BODY TYPE	SYSTEM WATTS	CCT	VOLTS	DIMMING OPTIONS	ELECTRICAL PHOTOCELL	MOUNTING	HOUSING FINISH
TY	100	4	U	D	P	S	Z
L-TY Typhoon	100 = 100W	4 = 4000k	U = 120-277V	D = Dimming	P = Photocell N = None	S = SlipfitterN T = Trunnion	Z = Bronze V = Silver B = Black W = White G = Grey

TYPHOON

LED FLOOD LIGHT
35W | 3782 LUMENS | REPLACES 150W

ORDER NUMBER: **L-TY35-4UD-P-T-Z**



KEY BENEFITS

Die-cast (grade of aluminum) Aluminum with tempered glass lens, utilizing stainless steel hardware.

- Premium brand LEDs (Philips® chips depending on SKU) and YG® driver technology
- Dimming option available
- Precision die cast
- Industrial grade, Button-type photocell
- Wet location rated fixture for outdoor use
- Chip and fade resistant powder coat finish in any color

APPLICATIONS

Designed for architectural & property lighting. Energy efficient & durable providing uniform lighting with no hotspots

CERTIFICATIONS

• DLC 4.1 Premium • cUL-us Listed



* Please refer to the DLC QPL website for the latest and most complete info www.designlights.org/QPL


PRODUCT PERFORMANCE

SYSTEM WATTAGE	LED WATTAGE	LUMENS	LP/W	CRI	REPLACES (MH)
35W	30W	3782 lm	110 lm/w	≥80	150W


PRODUCT SUMMARY

EFFICACY	>110 lm/w
LED CHIP	Premium brand LEDs (Phillips® chips depending on SKU)
CCT	4000K
DRIVER	Dimmable LED power supplies, Current can be adjusted The 0-10V Dimming type is continuous, The product can dim to 10%
DRIVER EFFICIENCY	>85%
DIMENSIONS	10.3in x 9.1in x 7.2in
WEIGHT	8.26 lbs
STANDARD LIFETIME	Design minimum 75,000 hours
STANDARD WARRANTY	5 Years
WATER PROOFING GRADE	IP65

PRODUCT DIMENSIONS

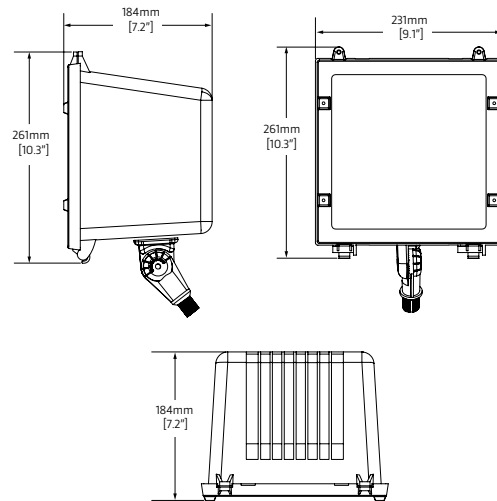

PRODUCT PHOTOMETRY



PRODUCT SPECIFICATIONS & VARIATIONS

BODY TYPE	SYSTEM WATTS	CCT	VOLTAGE	DIMMING OPTIONS	ELECTRICAL PHOTOCELL	MOUNTING	HOUSING FINISH
L-TY	35	4	U	D	P	T	Z
L-TY Typhoon	35 = 35W	4=4000K	U = 120-277V	D = Dimming	P = Photocell N = None	T = Trunnion S = Slipfitter	Z = Bronze V = Silver B = Black W = White G = Grey

TYPHOON

LED FLOOD LIGHT
20W | 1870 LUMENS | REPLACES 100W

ORDER NUMBER: **L-TY20-4UD-P-T-Z**



KEY BENEFITS

Die-cast (grade of aluminum) Aluminum with tempered glass lens, utilizing stainless steel hardware.

- Premium brand LEDs (Philips® chips depending on SKU) and YG® driver technology
- Dimming option available
- Precision die cast
- Industrial grade, Button-type photocell
- Wet location rated fixture for outdoor use
- Chip and fade resistant powder coat finish in any color

APPLICATIONS

Designed for architectural & property lighting. Energy efficient & durable providing uniform lighting with no hotspots

CERTIFICATIONS

• DLC 4.1 Premium • cUL-us Listed



* Please refer to the DLC QPL website for the latest and most complete info www.designlights.org/QPL


PRODUCT PERFORMANCE

SYSTEM WATTAGE	LED WATTAGE	LUMENS	LP/W	CRI	REPLACES (MH)
20W	18W	1870 lm	101 lm/w	≥80	100W

PRODUCT SUMMARY


EFFICACY	>101 lm/w
LED CHIP	Premium brand LEDs (Phillips® chips depending on SKU)
CCT	4000K
DRIVER	Dimmable LED power supplies, Current can be adjusted The 0-10V Dimming type is continuous, The product can dim to 10%
DRIVER EFFICIENCY	>85%
DIMENSIONS	9.2in x 9.1in x 7.5in
WEIGHT	8.81lbs
STANDARD LIFETIME	Design minimum 75,000 hours
STANDARD WARRANTY	5 Years
WATER PROOFING GRADE	IP65

PRODUCT DIMENSIONS

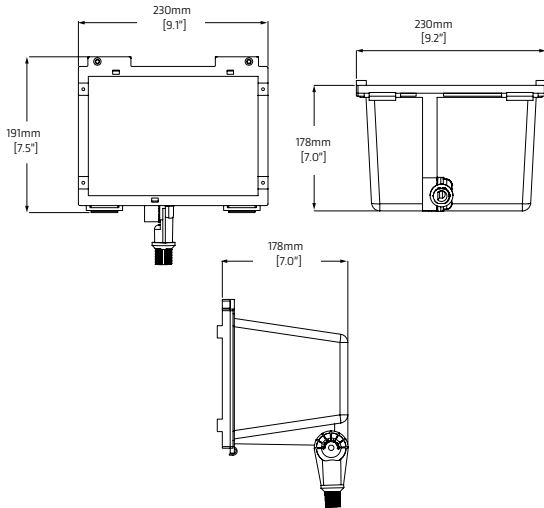

PRODUCT PHOTOMETRY

MOUNTED AT 10ft.



PRODUCT SPECIFICATIONS & VARIATIONS

BODY TYPE	SYSTEM WATTS	CCT	VOLTAGE	DIMMING OPTIONS	ELECTRICAL PHOTOCELL	MOUNTING	HOUSING FINISH
L-TY	20	4	U	D	P	T	Z
L-TY Typhoon	20 = 20W	4=4000K	U = 120-277V	D = Dimming	P = Photocell N = None	T = Trunnion S = Slipfitter	Z = Bronze V = Silver B = Black W = White G = Grey

BULLDOG

LED AREA/FLOOD LIGHT
115W | 13805 LUMENS | REPLACES 320W

ORDER NUMBER: **L-BU115-4UD-P-S-Z**



KEY BENEFITS

UL wet listed die-cast aluminum construction with impact resistant UV Stabilized polycarbonate linear prismatic. Premium brand LEDs (Samsung® or LG® chips depending on SKU) YG® driver technology

- Dimming option available
- Precision die cast
- Trunnion and Slip fitter mount available
- Optional arm mount (sold separately)
- Wet Location rated fixture for outdoor use
- Chip and fade resistant powder coat finish in any color
- Industrial grade, Button-type photocell available.

APPLICATIONS

Ideal for driveways adjacent to buildings and outside warehousing

CERTIFICATIONS

• DLC 4.1 Premium • cUL-us Listed



* Please refer to the DLC QPL website for the latest and most complete info www.designlights.org/QPL


PRODUCT PERFORMANCE

SYSTEM WATTAGE	LED WATTAGE	LUMENS	LP/W	CRI	REPLACES (MH)
115W	102W	13805 lm	120 lm/w	≥80	320W

PRODUCT SUMMARY


EFFICACY	>120 lm/w
LED CHIP	Premium brand LEDs (Samsung® or LG® chips depending on SKU)
CCT	4000K
DRIVER	Dimmable LED power supplies, Current can be adjusted The 0-10V Dimming type is continuous, The product can dim to 10%
DRIVER EFFICIENCY	>85%
DIMENSIONS	17.1in x 16.5in x 7.2in
WEIGHT	45 lbs
STANDARD LIFETIME	Design minimum 75,000 hours
STANDARD WARRANTY	5 Years
WATER PROOFING GRADE	IP65

PRODUCT DIMENSIONS

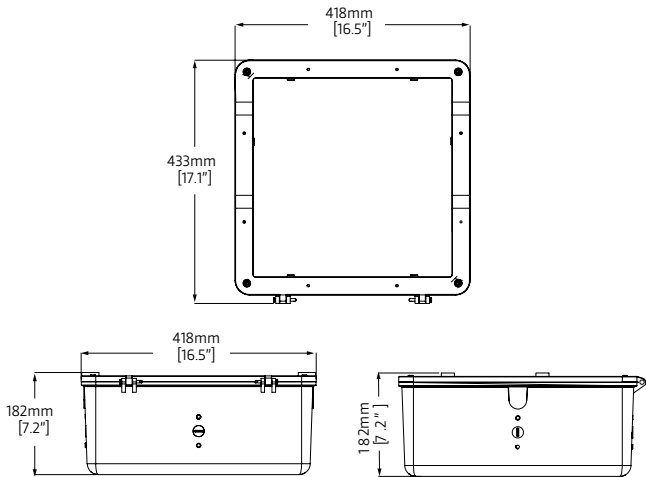

PRODUCT PHOTOMETRY

MOUNTED AT 15ft.

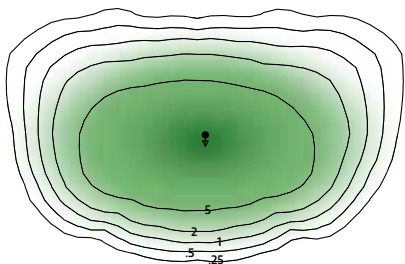

PRODUCT SPECIFICATIONS & VARIATIONS

BODY TYPE	SYSTEM WATTS	CCT	VOLTAGE	DIMMING OPTIONS	ELECTRICAL PHOTOCELL	MOUNTING	HOUSING FINISH
L-BU	115	4	U	D	P	S	Z
L-BU Bulldog	115 = 115W	4=4000K	U = 120-277V	D = Dimming	P = Photocell N = None	S = Slipfitter T = Trunnion	Z = Bronze V = Silver B = Black W = White G = Grey

BULLDOG

LED AREA/FLOOD LIGHT
145W | 16307 LUMENS | REPLACES 320W

ORDER NUMBER: **L-BU145-4UD-P-S-Z**



KEY BENEFITS

UL wet listed die-cast aluminum construction with impact resistant UV Stabilized polycarbonate linear prismatic. Premium brand LEDs (Samsung® or LG® chips depending on SKU) YG® driver technology

- Dimming option available
- Precision die cast
- Trunnion and Slip fitter mount available
- Optional arm mount (sold separately)
- Wet Location rated fixture for outdoor use
- Chip and fade resistant powder coat finish in any color
- Industrial grade, Button-type photocell available.

APPLICATIONS

Ideal for driveways adjacent to buildings and outside warehousing

CERTIFICATIONS

• DLC 4.1 Premium • cUL-us Listed



* Please refer to the DLC QPL website for the latest and most complete info www.designlights.org/QPL


PRODUCT PERFORMANCE

SYSTEM WATTAGE	LED WATTAGE	LUMENS	LP/W	CRI	REPLACES (MH)
145W	130W	16307 lm	113 lm/w	≥80	320W

PRODUCT SUMMARY


EFFICACY	>113 lm/w
LED CHIP	Premium brand LEDs (Samsung® or LG® chips depending on SKU)
CCT	4000K
DRIVER	Dimmable LED power supplies, Current can be adjusted The 0-10V Dimming type is continuous, The product can dim to 10%
DRIVER EFFICIENCY	>85%
DIMENSIONS	17.1in x 16.5in x 7.2in
WEIGHT	21 lbs
STANDARD LIFETIME	Design minimum 75,000 hours
STANDARD WARRANTY	5 Years
WATER PROOFING GRADE	IP65

PRODUCT DIMENSIONS

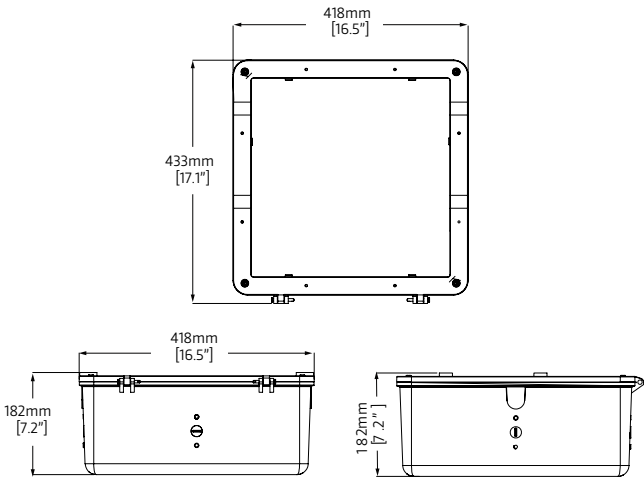

PRODUCT PHOTOMETRY

MOUNTED AT 15ft.

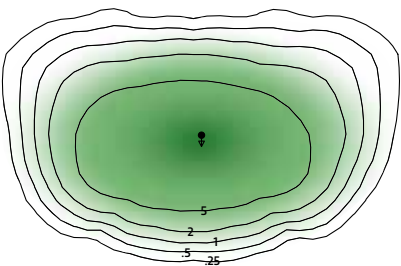

PRODUCT SPECIFICATIONS & VARIATIONS

BODY TYPE	SYSTEM WATTS	CCT	VOLTAGE	DIMMING OPTIONS	ELECTRICAL PHOTOCELL	MOUNTING	HOUSING FINISH
L-BU	145	4	U	D	P	S	Z
L-BU Bulldog	145 = 145W	4=4000K	U = 120-277V	D = Dimming	P = Photocell N = None	S = Slipfitter T = Trunnion	Z = Bronze V = Silver B = Black W = White G = Grey

BULLDOG

LED FLOOD LIGHT
200W | 20885 LUMENS | REPLACES 400W

ORDER NUMBER: **L-BU200-DZ4**



KEY BENEFITS

UL wet listed die-cast aluminum construction with impact resistant UV Stabilized polycarbonate linear prismatic. Premium brand LEDs (Samsung® or LG® chips depending on SKU) YG® driver technology

- Dimming option available • Precision die cast • Trunnion and Slip fitter mount available • Optional arm mount (sold separately) • Wet Location rated fixture for outdoor use • Chip and fade resistant powder coat finish in any color • Industrial grade, Button-type photocell available.

APPLICATIONS

Ideal for driveways adjacent to buildings and outside warehousing

CERTIFICATIONS

• DLC 4.1 Premium • cUL-us Listed



* Please refer to the DLC QPL website for the latest and most complete info www.designlights.org/QPL


PRODUCT PERFORMANCE

SYSTEM WATTAGE	LED WATTAGE	LUMENS	LP/W	CRI	REPLACES (MH)
200W	180W	20885 lm	109 lm/w	≥80	400W

PRODUCT SUMMARY


EFFICACY	>109 lm/w
LED CHIP	Premium brand LEDs (Samsung® or LG® chips depending on SKU)
CCT	4000K
DRIVER	Dimmable LED power supplies, Current can be adjusted The 0-10V Dimming type is continuous, The product can dim to 10%
DRIVER EFFICIENCY	>85%
DIMENSIONS	17.1in x 16.5in x 7.2in
WEIGHT	21 lbs
STANDARD LIFETIME	Design minimum 75,000 hours
STANDARD WARRANTY	5 Years
WATER PROOFING GRADE	IP65

PRODUCT DIMENSIONS

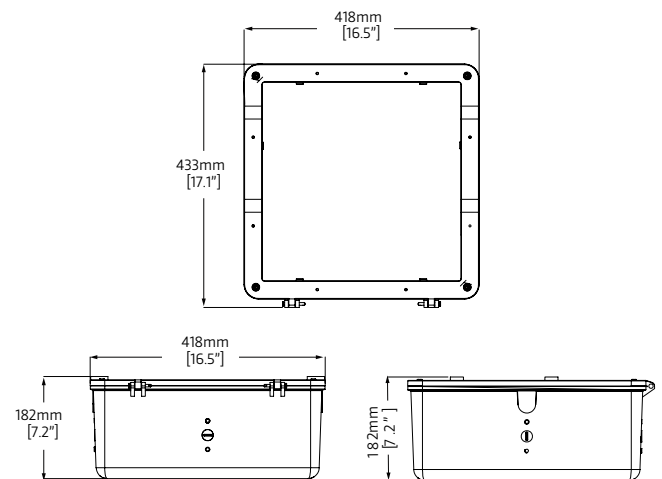

PRODUCT PHOTOMETRY

MOUNTED AT 15ft.

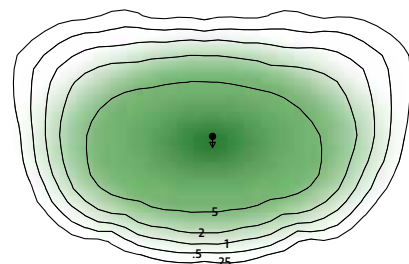

PRODUCT SPECIFICATIONS & VARIATIONS

BODY TYPE	SYSTEM WATTS	CCT	VOLTS	DIMMING OPTIONS	ELECTRICAL PHOTOCELL	MOUNTING	HOUSING FINISH
TY	200	4	U	D	P	S	Z
L-TY Typhoon	200 = 200W	4 = 4000k	U = 120-277V	D = Dimming	P = Photocell N = None	S = SlipfitterN T = Trunnion	Z = Bronze V = Silver B = Black W = White G = Grey

BULLDOG

LED AREA/FLOOD LIGHT
250W | 27935 LUMENS | REPLACES 600W

ORDER NUMBER: **L-BU250-4UD-P-S-Z**



KEY BENEFITS

UL wet listed die-cast aluminum construction with impact resistant UV Stabilized polycarbonate linear prismatic. Premium brand LEDs (Samsung® or LG® chips depending on SKU) YG® driver technology

- Dimming option available
- Precision die cast
- Trunnion and Slip fitter mount available
- Optional arm mount (sold separately)
- Wet Location rated fixture for outdoor use
- Chip and fade resistant powder coat finish in any color
- Industrial grade, Button-type photocell available.

APPLICATIONS

Ideal for driveways adjacent to buildings and outside warehousing

CERTIFICATIONS

• DLC 4.1 Premium • cUL-us Listed



* Please refer to the DLC QPL website for the latest and most complete info www.designlights.org/QPL


PRODUCT PERFORMANCE

SYSTEM WATTAGE	LED WATTAGE	LUMENS	LP/W	CRI	REPLACES (MH)
250W	225W	27935 lm	117 lm/w	≥80	600W

PRODUCT SUMMARY


EFFICACY	>117 lm/w
LED CHIP	Premium brand LEDs (Samsung® or LG® chips depending on SKU)
CCT	4000K
DRIVER	Dimmable LED power supplies, Current can be adjusted The 0-10V Dimming type is continuous, The product can dim to 10%
DRIVER EFFICIENCY	>85%
DIMENSIONS	23.9in x 23.9in x 10.2in
WEIGHT	45 lbs
STANDARD LIFETIME	Design minimum 75,000 hours
STANDARD WARRANTY	5 Years
WATER PROOFING GRADE	IP65

PRODUCT DIMENSIONS

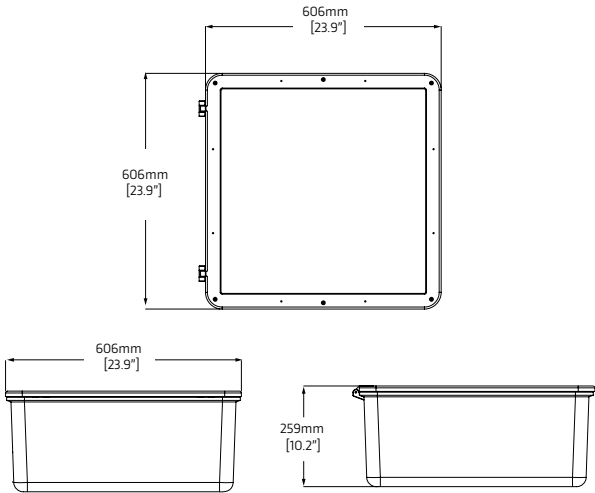

PRODUCT PHOTOMETRY

MOUNTED AT 15ft.

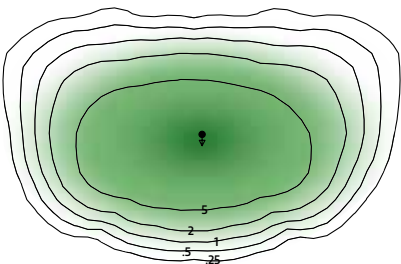

PRODUCT SPECIFICATIONS & VARIATIONS

BODY TYPE	SYSTEM WATTS	CCT	VOLTAGE	DIMMING OPTIONS	ELECTRICAL PHOTOCELL	MOUNTING	HOUSING FINISH
L-BU	250	4	U	D	P	S	Z
L-BU Bulldog	250 = 250W	4=4000K	U = 120-277V	D = Dimming	P = Photocell N = None	S = Slipfitter T = Trunnion	Z = Bronze V = Silver B = Black W = White G = Grey

BULLDOG

LED AREA/FLOOD LIGHT
300W | 34284 LUMENS | REPLACES 750W

ORDER NUMBER: **L-BU300-4UD-P-S-Z**



KEY BENEFITS

UL wet listed die-cast aluminum construction with impact resistant UV Stabilized polycarbonate linear prismatic. Premium brand LEDs (Samsung® or LG® chips depending on SKU) YG® driver technology

- Dimming option available
- Precision die cast
- Trunnion and Slip fitter mount available
- Optional arm mount (sold separately)
- Wet Location rated fixture for outdoor use
- Chip and fade resistant powder coat finish in any color
- Industrial grade, Button-type photocell available.

APPLICATIONS

Ideal for driveways adjacent to buildings and outside warehousing

CERTIFICATIONS

• DLC 4.1 Premium • cUL-us Listed



* Please refer to the DLC QPL website for the latest and most complete info www.designlights.org/QPL


PRODUCT PERFORMANCE

SYSTEM WATTAGE	LED WATTAGE	LUMENS	LP/W	CRI	REPLACES (MH)
300W	270W	34284 lm	117 lm/w	≥80	750W

PRODUCT SUMMARY


EFFICACY	>117 lm/w
LED CHIP	Premium brand LEDs (Samsung® or LG® chips depending on SKU)
CCT	4000K
DRIVER	Dimmable LED power supplies, Current can be adjusted The 0-10V Dimming type is continuous, The product can dim to 10%
DRIVER EFFICIENCY	>85%
DIMENSIONS	23.9in x 23.9in x 10.2in
WEIGHT	45 lbs
STANDARD LIFETIME	Design minimum 75,000 hours
STANDARD WARRANTY	5 Years
WATER PROOFING GRADE	IP65

PRODUCT DIMENSIONS

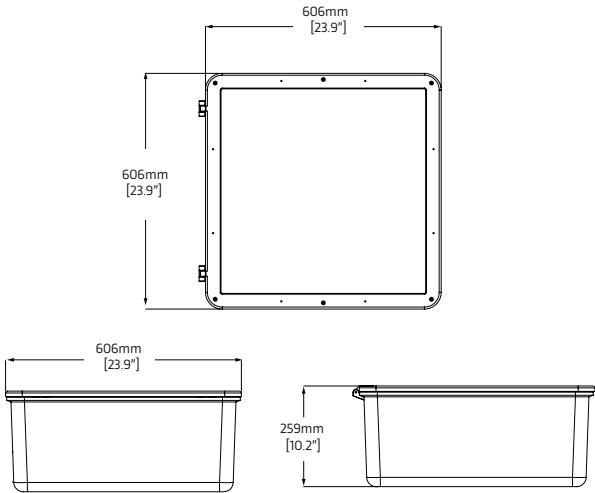

PRODUCT PHOTOMETRY

MOUNTED AT 15ft.

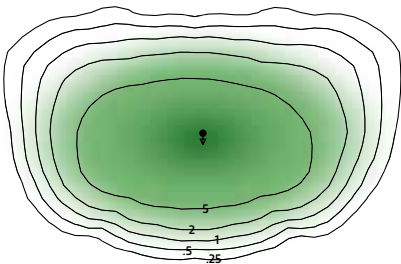

PRODUCT SPECIFICATIONS & VARIATIONS

BODY TYPE	SYSTEM WATTS	CCT	VOLTAGE	DIMMING OPTIONS	ELECTRICAL PHOTOCELL	MOUNTING	HOUSING FINISH
L-BU	300	4	U	D	P	S	Z
L-BU Bulldog	300 = 300W	4=4000K	U = 120-277V	D = Dimming	P = Photocell N = None	S = Slipfitter T = Trunnion	Z = Bronze V = Silver B = Black W = White G = Grey

BULLDOG

LED FLOOD LIGHT
400W | 44723 LUMENS | REPLACES 1000W

ORDER NUMBER: **L-BU400-DZ4**



KEY BENEFITS

UL wet listed die-cast aluminum construction with impact resistant UV Stabilized polycarbonate linear prismatic. Premium brand LEDs (Samsung® or LG® chips depending on SKU) YG® driver technology

- Dimming option available • Precision die cast • Trunnion and Slip fitter mount available • Optional arm mount (sold separately) • Wet Location rated fixture for outdoor use • Chip and fade resistant powder coat finish in any color • Industrial grade, Button-type photocell available.

APPLICATIONS

Ideal for driveways adjacent to buildings and outside warehousing

CERTIFICATIONS

• DLC 4.1 Premium • cUL-us Listed



* Please refer to the DLC QPL website for the latest and most complete info www.designlights.org/QPL


PRODUCT PERFORMANCE

SYSTEM WATTAGE	LED WATTAGE	LUMENS	LP/W	CRI	REPLACES (MH)
400W	360W	44723 lm	116 lm/w	≥80	1000W

PRODUCT SUMMARY


EFFICACY	>116 lm/w
LED CHIP	Premium brand LEDs (Samsung® or LG® chips depending on SKU)
CCT	4000K
DRIVER	Dimmable LED power supplies, Current can be adjusted The 0-10V Dimming type is continuous, The product can dim to 10%
DRIVER EFFICIENCY	>85%
DIMENSIONS	23.9in x 23.9in x 10.2in
WEIGHT	45 lbs
STANDARD LIFETIME	Design minimum 75,000 hours
STANDARD WARRANTY	5 Years
WATER PROOFING GRADE	IP65

PRODUCT DIMENSIONS

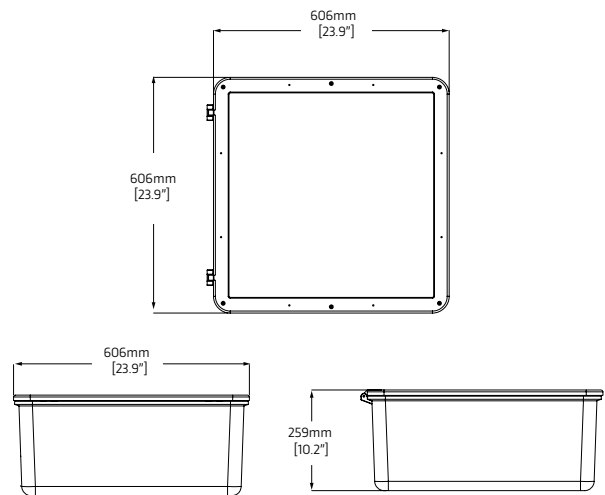

PRODUCT PHOTOMETRY

MOUNTED AT 15ft.

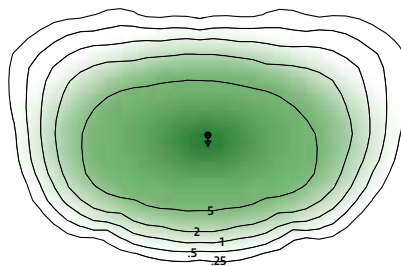

PRODUCT SPECIFICATIONS & VARIATIONS

BODY TYPE	SYSTEM WATTS	CCT	VOLTS	DIMMING OPTIONS	ELECTRICAL PHOTOCELL	MOUNTING	HOUSING FINISH
TY	400	4	U	D	P	S	Z
L-TY Typhoon	400 = 400W	4 = 4000k	U = 120-277V	D = Dimming	P = Photocell N = None	S = SlipfitterN T = Trunnion	Z = Bronze V = Silver B = Black W = White G = Grey

AREA LIGHTS

PHANTOM

LED AREA LIGHT
250W | 30826 LUMENS | REPLACES 400W

ORDER NUMBER: **L-PH250-4UD-E2-P-K-Z**



KEY BENEFITS

UL wet listed die-cast aluminum construction with impact resistant UV Stabilized polycarbonate linear prismatic lens complete with stainless steel hardware. Mounts to 4" junction box with wall mount option, plus tenon mount using slipfitter, trunnion for surface mount, square pole bracket and extension arm mount depending on application requirements.

- Designed for maximum aesthetic appeal and thermal management
- Multiple mounting configurations for maximum application versatility
- Attractive fin design for thermal management
- LG® 3535 or CREE® XPG2 LED's and YG® driver technology
- Dimming option available
- Precision die cast
- IP65 rated fixture for outdoor use
- Chip and fade resistant powder coat finish in any color
- Precision Type II, III, IV, V optics
- Industrial grade, 3 or 5 pin Photocell Receptacle

APPLICATIONS

Ideal for driveways adjacent to buildings and outside warehousing

CERTIFICATIONS

• DLC 4.1 Premium • cUL-us Listed



* Please refer to the DLC QPL website for the latest and most complete info www.designlights.org/QPL


PRODUCT PERFORMANCE

SYSTEM WATTAGE	LED WATTAGE	LUMENS	LP/W	CRI	REPLACES (MH)
250W	225W	30826 lm	123 lm/w	≥70	400W

PRODUCT SUMMARY


EFFICACY	>123 lm/w
LED CHIP	LG® 3535 or CREE® XPG2 LED's
CCT	4000K
DRIVER	Dimmable LED power supplies, Current can be adjusted The 0-10V Dimming type is continuous, The product can dim to 10%
DRIVER EFFICIENCY	>85%
DIMENSIONS	23.62in x 13.58in x 6.47in
WEIGHT	22.04 lbs
STANDARD LIFETIME	Design minimum 75,000 hours
STANDARD WARRANTY	5 Years
WATER PROOFING GRADE	IP65

PRODUCT DIMENSIONS

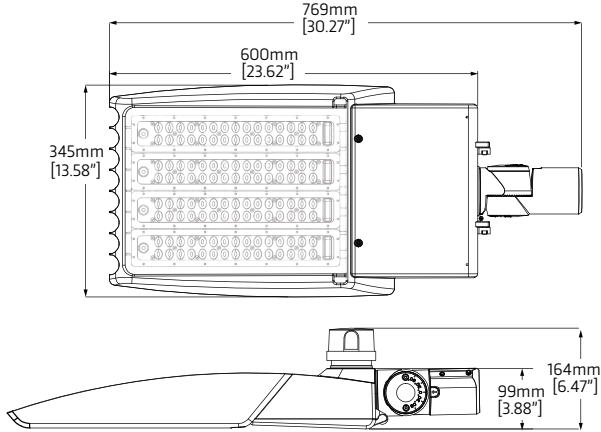

PRODUCT PHOTOMETRY

MOUNTED AT 30ft.



PRODUCT SPECIFICATIONS & VARIATIONS

BODY TYPE	SYSTEM WATTS	CCT	VOLTAGE	DIMMING OPTIONS	ELECTRICAL OPTICS	ELECTRICAL PHOTOCELL	MOUNTING	HOUSING FINISH
L-PH	250	4	U	D	E2	P	K	Z
L-PH Phantom	250 = 250W	4=4000K	U = 120-277V	D = Dimming	E2 = Type II E3 = Type III E4 = Type IV E5 = Type V	P = Photocell N = None	K = Knuckle T = Trunnion S = Slipfitter W = Wall Mount P = Pole Bracket E = External Arm	Z = Bronze V = Silver B = Black W = White G = Grey

PHANTOM

LED AREA LIGHT
200W | 24766 LUMENS | REPLACES 400W

ORDER NUMBER: **L-PH200-4UD-E2-P-K-Z**



KEY BENEFITS

UL wet listed die-cast aluminum construction with impact resistant UV Stabilized polycarbonate linear prismatic lens complete with stainless steel hardware. Mounts to 4" junction box with wall mount option, plus tenon mount using slipfitter, trunnion for surface mount, square pole bracket and extension arm mount depending on application requirements.

- Designed for maximum aesthetic appeal and thermal management
- Multiple mounting configurations for maximum application versatility
- Attractive fin design for thermal management
- LG® 3535 or CREE® XPG2 LED's and YG® driver technology
- Dimming option available
- Precision die cast
- IP65 rated fixture for outdoor use
- Chip and fade resistant powder coat finish in any color
- Precision Type II, III, IV, V optics
- Industrial grade, 3 or 5 pin Photocell Receptacle

APPLICATIONS

Ideal for driveways adjacent to buildings and outside warehousing

CERTIFICATIONS

• DLC 4.1 Premium • cUL-us Listed



* Please refer to the DLC QPL website for the latest and most complete info www.designlights.org/QPL


PRODUCT PERFORMANCE

SYSTEM WATTAGE	LED WATTAGE	LUMENS	LP/W	CRI	REPLACES (MH)
200W	180W	24766 lm	124 lm/w	≥70	400W

PRODUCT SUMMARY


EFFICACY	>124 lm/w
LED CHIP	LG® 3535 or CREE® XPG2 LED's
CCT	4000K
DRIVER	Dimmable LED power supplies, Current can be adjusted The 0-10V Dimming type is continuous, The product can dim to 10%
DRIVER EFFICIENCY	>85%
DIMENSIONS	23.62in x 13.58in x 6.47in
WEIGHT	22.04 lbs
STANDARD LIFETIME	Design minimum 75,000 hours
STANDARD WARRANTY	5 Years
WATER PROOFING GRADE	IP65

PRODUCT DIMENSIONS

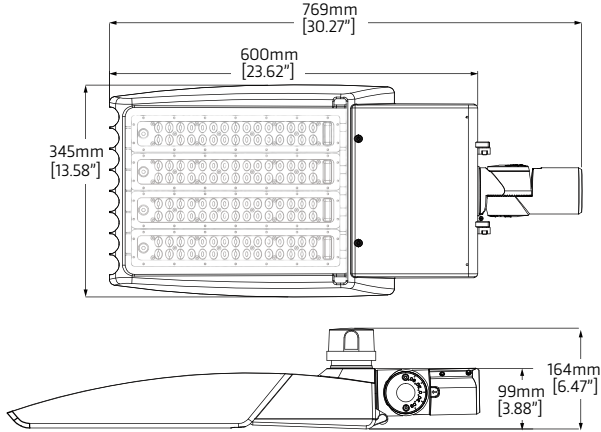

PRODUCT PHOTOMETRY

MOUNTED AT 30ft.



PRODUCT SPECIFICATIONS & VARIATIONS

BODY TYPE	SYSTEM WATTS	CCT	VOLTAGE	DIMMING OPTIONS	ELECTRICAL OPTICS	ELECTRICAL PHOTOCELL	MOUNTING	HOUSING FINISH
L-PH	200	4	U	D	E2	P	K	Z
L-PH Phantom	200 = 200W	4=4000K	U = 120-277V	D = Dimming	E2 = Type II E3 = Type III E4 = Type IV E5 = Type V	P = Photocell N = None	K = Knuckle T = Trunnion S = Slipfitter W = Wall Mount P = Pole Bracket E = External Arm	Z = Bronze V = Silver B = Black W = White G = Grey

PHANTOM

LED AREA LIGHT
150W | 19740 LUMENS | REPLACES 400W



ORDER NUMBER: **L-PH150-4UD-E2-P-K-Z**

KEY BENEFITS

UL wet listed die-cast aluminum construction with impact resistant UV Stabilized polycarbonate linear prismatic lens complete with stainless steel hardware. Mounts to 4" junction box with wall mount option, plus tenon mount using slipfitter, trunnion for surface mount, square pole bracket and extension arm mount depending on application requirements.

- Designed for maximum aesthetic appeal and thermal management
- Multiple mounting configurations for maximum application versatility
- Attractive fin design for thermal management
- LG® 3535 or CREE® XPG2 LED's and YG® driver technology
- Dimming option available
- Precision die cast
- IP65 rated fixture for outdoor use
- Chip and fade resistant powder coat finish in any color
- Precision Type II, III, IV, V optics
- Industrial grade, 3 or 5 pin Photocell Receptacle

APPLICATIONS

Ideal for driveways adjacent to buildings and outside warehousing

CERTIFICATIONS

• **DLC 4.1 Premium** • **cUL-us Listed**



* Please refer to the DLC QPL website for the latest and most complete info www.designlights.org/QPL


PRODUCT PERFORMANCE

SYSTEM WATTAGE	LED WATTAGE	LUMENS	LP/W	CRI	REPLACES (MH)
150W	135W	19740 lm	132 lm/w	≥70	400W

PRODUCT SUMMARY


EFFICACY	>132 lm/w
LED CHIP	LG® 3535 or CREE® XPG2 LED's
CCT	4000K
DRIVER	Dimmable LED power supplies, Current can be adjusted The 0-10V Dimming type is continuous, The product can dim to 10%
DRIVER EFFICIENCY	>85%
DIMENSIONS	23.62in x 13.58in x 6.47in
WEIGHT	22.04 lbs
STANDARD LIFETIME	Design minimum 75,000 hours
STANDARD WARRANTY	5 Years
WATER PROOFING GRADE	IP65

PRODUCT DIMENSIONS

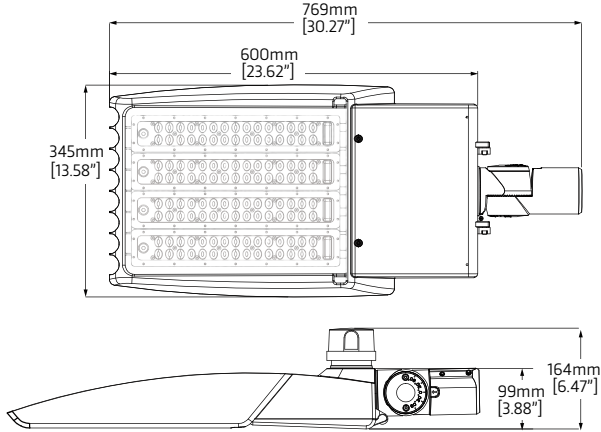

PRODUCT PHOTOMETRY

MOUNTED AT 20ft.

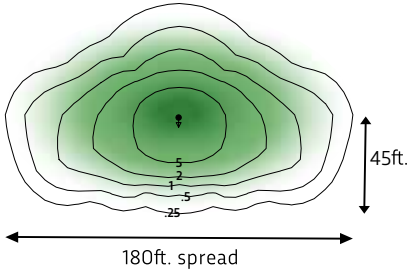

PRODUCT SPECIFICATIONS & VARIATIONS

BODY TYPE	SYSTEM WATTS	CCT	VOLTAGE	DIMMING OPTIONS	ELECTRICAL OPTICS	ELECTRICAL PHOTOCELL	MOUNTING	HOUSING FINISH
L-PH	150	4	U	D	E2	P	K	Z
L-PH Phantom	150 = 150W	4=4000K	U = 120-277V	D = Dimming	E2 = Type II E3 = Type III E4 = Type IV E5 = Type V	P = Photocell N = None	K = Knuckle T = Trunnion S = Slipfitter W = Wall Mount P = Pole Bracket E = External Arm	Z = Bronze V = Silver B = Black W = White G = Grey

PHANTOM

LED AREA LIGHT
120W | 14499 LUMENS | REPLACES 300W

ORDER NUMBER: **L-PH120-4UD-E2-P-K-Z**



KEY BENEFITS

UL wet listed die-cast aluminum construction with impact resistant UV Stabilized polycarbonate linear prismatic lens complete with stainless steel hardware. Mounts to 4" junction box with wall mount option, plus tenon mount using slipfitter, trunnion for surface mount, square pole bracket and extension arm mount depending on application requirements.

- Designed for maximum aesthetic appeal and thermal management
- Multiple mounting configurations for maximum application versatility
- Attractive fin design for thermal management
- LG® 3535 or CREE® XPG2 LED's and YG® driver technology
- Dimming option available
- Precision die cast
- IP65 rated fixture for outdoor use
- Chip and fade resistant powder coat finish in any color
- Precision Type II, III, IV, V optics
- Industrial grade, 3 or 5 pin Photocell Receptacle

APPLICATIONS

Ideal for driveways adjacent to buildings and outside warehousing

CERTIFICATIONS

• DLC 4.1 Premium • cUL-us Listed



* Please refer to the DLC QPL website for the latest and most complete info www.designlights.org/QPL


PRODUCT PERFORMANCE

SYSTEM WATTAGE	LED WATTAGE	LUMENS	LP/W	CRI	REPLACES (MH)
120W	108W	14499 lm	123 lm/w	≥70	300W

PRODUCT SUMMARY


EFFICACY	>123 lm/w
LED CHIP	LG® 3535 or CREE® XPG2 LED's
CCT	4000K
DRIVER	Dimmable LED power supplies, Current can be adjusted The 0-10V Dimming type is continuous, The product can dim to 10%
DRIVER EFFICIENCY	>85%
DIMENSIONS	18.96in x 11.32in x 6.47in
WEIGHT	12.66 lbs
STANDARD LIFETIME	Design minimum 75,000 hours
STANDARD WARRANTY	5 Years
WATER PROOFING GRADE	IP65

PRODUCT DIMENSIONS

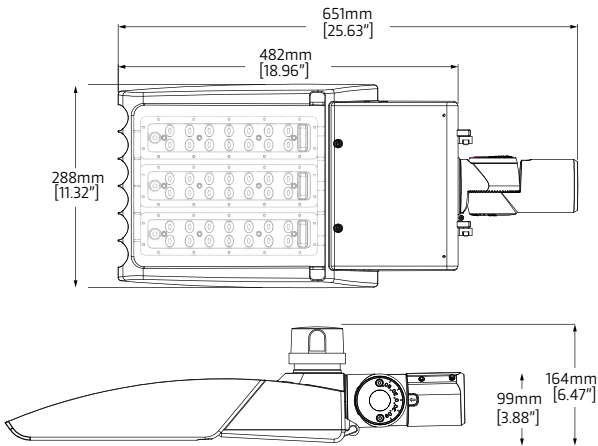

PRODUCT PHOTOMETRY

MOUNTED AT 20ft.

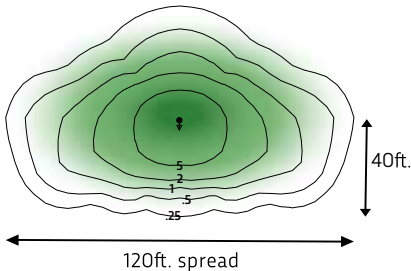

PRODUCT SPECIFICATIONS & VARIATIONS

BODY TYPE	SYSTEM WATTS	CCT	VOLTAGE	DIMMING OPTIONS	ELECTRICAL OPTICS	ELECTRICAL PHOTOCELL	MOUNTING	HOUSING FINISH
L-PH	120	4	U	D	E2	P	K	Z
L-PH Phantom	120 = 120W	4=4000K	U = 120-277V	D = Dimming	E2 = Type II E3 = Type III E4 = Type IV E5 = Type V	P = Photocell N = None	K = Knuckle T = Trunnion S = Slipfitter W = Wall Mount P = Pole Bracket E = External Arm	Z = Bronze V = Silver B = Black W = White G = Grey

PHANTOM

LED AREA LIGHT
100W | 12359 LUMENS | REPLACES 250W

ORDER NUMBER: **L-PH100-4UD-E2-P-K-Z**



KEY BENEFITS

UL wet listed die-cast aluminum construction with impact resistant UV Stabilized polycarbonate linear prismatic lens complete with stainless steel hardware. Mounts to 4" junction box with wall mount option, plus tenon mount using slipfitter, trunnion for surface mount, square pole bracket and extension arm mount depending on application requirements.

- Designed for maximum aesthetic appeal and thermal management
- Multiple mounting configurations for maximum application versatility
- Attractive fin design for thermal management
- LG® 3535 or CREE® XPG2 LED's and YG® driver technology
- Dimming option available
- Precision die cast
- IP65 rated fixture for outdoor use
- Chip and fade resistant powder coat finish in any color
- Precision Type II, III, IV, V optics
- Industrial grade, 3 or 5 pin Photocell Receptacle

APPLICATIONS

Ideal for driveways adjacent to buildings and outside warehousing

CERTIFICATIONS

• DLC 4.1 Premium • cUL-us Listed



* Please refer to the DLC QPL website for the latest and most complete info www.designlights.org/QPL


PRODUCT PERFORMANCE

SYSTEM WATTAGE	LED WATTAGE	LUMENS	LP/W	CRI	REPLACES (MH)
100W	90W	12359 lm	127 lm/w	≥70	250W

PRODUCT SUMMARY


EFFICACY	>127 lm/w
LED CHIP	LG® 3535 or CREE® XPG2 LED's
CCT	4000K
DRIVER	Dimmable LED power supplies, Current can be adjusted The 0-10V Dimming type is continuous, The product can dim to 10%
DRIVER EFFICIENCY	>85%
DIMENSIONS	18.96in x 11.32in x 6.47in
WEIGHT	12.66 lbs
STANDARD LIFETIME	Design minimum 75,000 hours
STANDARD WARRANTY	5 Years
WATER PROOFING GRADE	IP65

PRODUCT DIMENSIONS

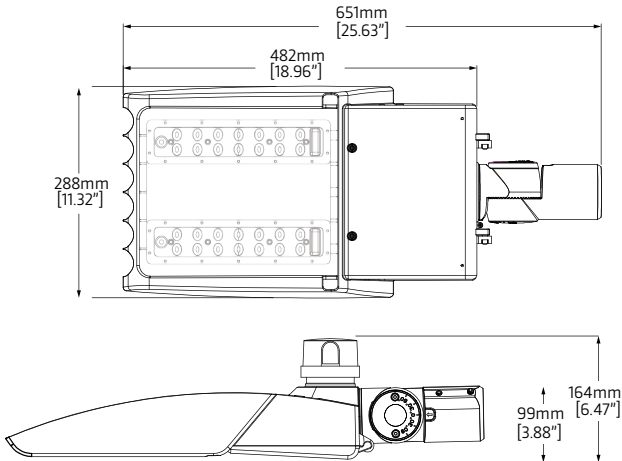

PRODUCT PHOTOMETRY

MOUNTED AT 20ft.

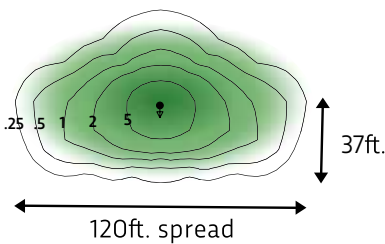

PRODUCT SPECIFICATIONS & VARIATIONS

BODY TYPE	SYSTEM WATTS	CCT	VOLTAGE	DIMMING OPTIONS	ELECTRICAL OPTICS	ELECTRICAL PHOTOCELL	MOUNTING	HOUSING FINISH
L-PH	100	4	U	D	E2	P	K	Z
L-PH Phantom	100 = 100W	4=4000K	U = 120-277V	D = Dimming	E2 = Type II E3 = Type III E4 = Type IV E5 = Type V	P = Photocell N = None	K = Knuckle T = Trunnion S = Slipfitter W = Wall Mount P = Pole Bracket E = External Arm	Z = Bronze V = Silver B = Black W = White G = Grey

PHANTOM

LED AREA LIGHT
65W | 8442 LUMENS | REPLACES 150W

ORDER NUMBER: **L-PH65-4UD-E2-P-K-Z**



KEY BENEFITS

UL wet listed die-cast aluminum construction with impact resistant UV Stabilized polycarbonate linear prismatic lens complete with stainless steel hardware. Mounts to 4" junction box with wall mount option, plus tenon mount using slipfitter, trunnion for surface mount, square pole bracket and extension arm mount depending on application requirements.

- Designed for maximum aesthetic appeal and thermal management
- Multiple mounting configurations for maximum application versatility
- Attractive fin design for thermal management
- LG® 3535 or CREE® XPG2 LED's and YG® driver technology
- Dimming option available
- Precision die cast
- IP65 rated fixture for outdoor use
- Chip and fade resistant powder coat finish in any color
- Precision Type II, III, IV, V optics
- Industrial grade, 3 or 5 pin Photocell Receptacle

APPLICATIONS

Ideal for driveways adjacent to buildings and outside warehousing

CERTIFICATIONS

• DLC 4.1 Premium • cUL-us Listed



* Please refer to the DLC QPL website for the latest and most complete info www.designlights.org/QPL


PRODUCT PERFORMANCE

SYSTEM WATTAGE	LED WATTAGE	LUMENS	LP/W	CRI	REPLACES (MH)
65W	58W	8442 lm	128 lm/w	≥70	150W

PRODUCT SUMMARY


EFFICACY	>128 lm/w
LED CHIP	LG® 3535 or CREE® XPG2 LED's
CCT	4000K
DRIVER	Dimmable LED power supplies, Current can be adjusted The 0-10V Dimming type is continuous, The product can dim to 10%
DRIVER EFFICIENCY	>85%
DIMENSIONS	18.96in x 11.32in x 6.47in
WEIGHT	12.66 lbs
STANDARD LIFETIME	Design minimum 75,000 hours
STANDARD WARRANTY	5 Years
WATER PROOFING GRADE	IP65

PRODUCT DIMENSIONS

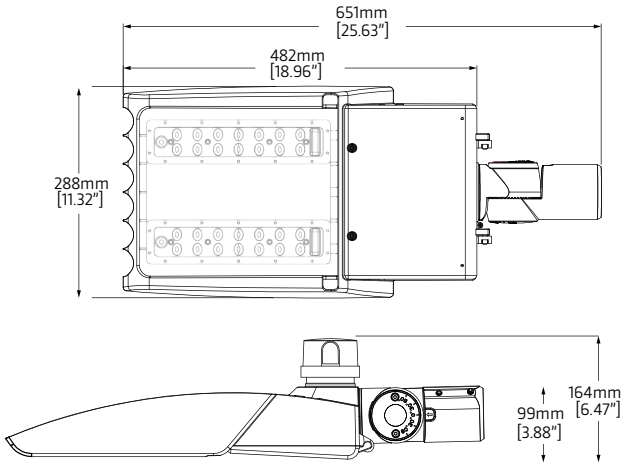

PRODUCT PHOTOMETRY

MOUNTED AT 15ft.

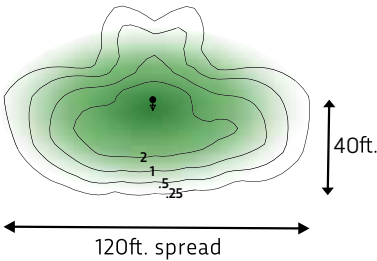

PRODUCT SPECIFICATIONS & VARIATIONS

BODY TYPE	SYSTEM WATTS	CCT	VOLTAGE	DIMMING OPTIONS	ELECTRICAL OPTICS	ELECTRICAL PHOTOCELL	MOUNTING	HOUSING FINISH
L-PH	65	4	U	D	E2	P	K	Z
L-PH Phantom	65 = 65W	4=4000K	U = 120-277V	D = Dimming	E2 = Type II E3 = Type III E4 = Type IV E5 = Type V	P = Photocell N = None	K = Knuckle T = Trunnion S = Slipfitter W = Wall Mount P = Pole Bracket E = External Arm	Z = Bronze V = Silver B = Black W = White G = Grey



ARGUS

LED AREA LIGHT
28W | 3192 LUMENS | REPLACES 100W

ORDER NUMBER: **L-AR28-4UD-P-K-Z**



KEY BENEFITS

UL wet listed die-cast aluminum construction with impact resistant UV Stabilized polycarbonate linear prismatic lens complete with stainless steel hardware. Can mount to a standard 4 inch square or an optional 24" arm mount. Alternate junction box mounting possible via universal mounting ring. Ingress resistant gasket included.

- Replace traditional HID barn light with worry free, long life LED version • Attractive fin design for thermal management • Cree® LED's and YG® driver technology • Precision die cast • Default Surface mount • Optional 24" arm mount available (sold separately) • IP65 rated fixture for outdoor use • Chip and fade resistant powder coat finish in any color • Industrial grade, 3 or 5 pin Photocell Receptacle.

APPLICATIONS

Ideal for driveways adjacent to buildings and outside warehousing

CERTIFICATIONS

• DLC 4.1 Premium • cUL-us Listed



* Please refer to the DLC QPL website for the latest and most complete info www.designlights.org/QPL


PRODUCT PERFORMANCE

SYSTEM WATTAGE	LED WATTAGE	LUMENS	LP/W	CRI	REPLACES (MH)
28W	25W	3192 lm	114 lm/w	≥75	100W


PRODUCT SUMMARY

EFFICACY	>114 lm/w
LED CHIP	Cree® LED's
CCT	4000K
DRIVER	Dimmable LED power supplies, Current can be adjusted The 0-10V Dimming type is continuous, The product can dim to 10%
DRIVER EFFICIENCY	>85%
DIMENSIONS	14.66in x 10.04in x 5.74in
WEIGHT	5.07 lbs
STANDARD LIFETIME	Design minimum 75,000 hours
STANDARD WARRANTY	5 Years
WATER PROOFING GRADE	IP65

PRODUCT DIMENSIONS

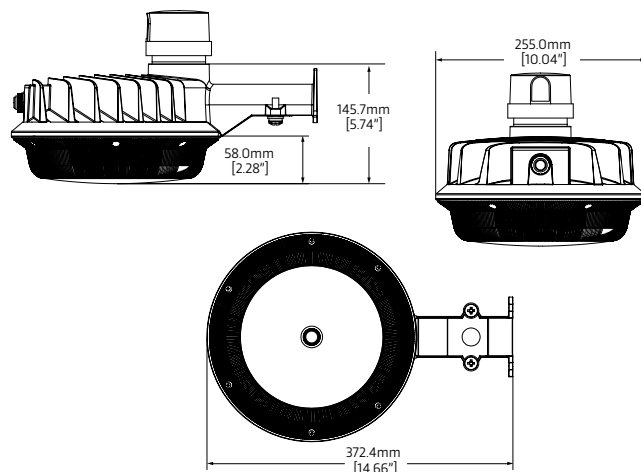

PRODUCT PHOTOMETRY



PRODUCT SPECIFICATIONS & VARIATIONS

BODY TYPE	SYSTEM WATTS	CCT	VOLTAGE	DIMMING OPTIONS	ELECTRICAL PHOTOCELL	MOUNTING	HOUSING FINISH
L-AR	28	4	U	D	P	K	Z
L-AR Argus	28 = 28W	4=4000K	U = 120-277V 12 = 120V 20 = 208V 22 = 220V 24 = 240V 27 = 277V 34 = 347V	D = Dimming	P = Photocell N = None	A1 = 24" Arm NA = None	Z = Bronze V = Silver B = Black W = White G = Grey

ARGUS

LED AREA LIGHT
40W | 4819 LUMENS | REPLACES 120W

ORDER NUMBER: **L-AR40-4UD-P-K-Z**



KEY BENEFITS

UL wet listed die-cast aluminum construction with impact resistant UV Stabilized polycarbonate linear prismatic lens complete with stainless steel hardware. Can mountsto to a standard 4 inch square or an optional 24" arm mount. Alternate junction box mounting possible via universal mounting ring. Ingress resistant gasket included.

- Replace traditional HID barn light with worry free, long life LED version • Attractive fin design for thermal management • Cree® LED's and YG® driver technology • Precision die cast • Default Surface mount • Optional 24" arm mount available (sold separately) • IP65 rated fixture for outdoor use • Chip and fade resistant powder coat finish in any color • Industrial grade, 3 or 5 pin Photocell Receptacle.

APPLICATIONS

Ideal for driveways adjacent to buildings and outside warehousing

CERTIFICATIONS

• DLC 4.1 Premium • cUL-us Listed



* Please refer to the DLC QPL website for the latest and most complete info www.designlights.org/QPL


PRODUCT PERFORMANCE

SYSTEM WATTAGE	LED WATTAGE	LUMENS	LP/W	CRI	REPLACES (MH)
40W	36W	4819 lm	123 lm/w	≥75	120W


PRODUCT SUMMARY

EFFICACY	>123 lm/w
LED CHIP	Cree® LED's
CCT	4000K
DRIVER	Dimmable LED power supplies, Current can be adjusted The 0-10V Dimming type is continuous, The product can dim to 10%
DRIVER EFFICIENCY	>85%
DIMENSIONS	14.66in x 10.04in x 5.74in
WEIGHT	5.07 lbs
STANDARD LIFETIME	Design minimum 75,000 hours
STANDARD WARRANTY	5 Years
WATER PROOFING GRADE	IP65

PRODUCT DIMENSIONS

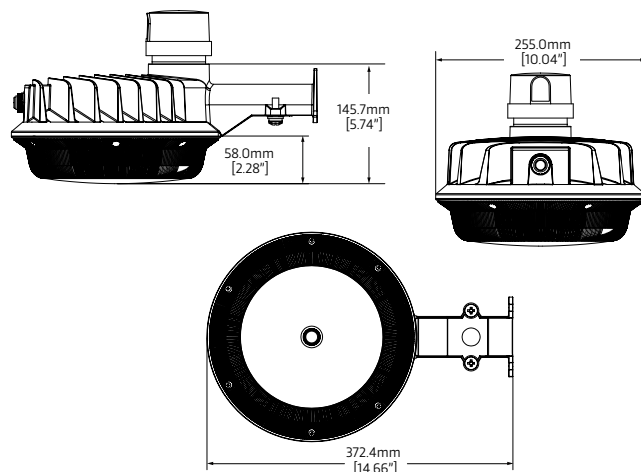

PRODUCT PHOTOMETRY



PRODUCT SPECIFICATIONS & VARIATIONS

BODY TYPE	SYSTEM WATTS	CCT	VOLTAGE	DIMMING OPTIONS	ELECTRICAL PHOTOCELL	MOUNTING	HOUSING FINISH
L-AR	40	4	U	D	P	K	Z
L-AR Argus	40 = 40W	4=4000K	U = 120-277V 12 = 120V 20 = 208V 22 = 220V 24 = 240V 27 = 277V 34 = 347V	D = Dimming	P = Photocell N = None	A1 = 24" Arm NA = None	Z = Bronze V = Silver B = Black W = White G = Grey

CEILING & CANOPY LIGHTS



DRAGON FLY

LED CEILING LIGHT
40W | 4473 LUMENS | REPLACES 100W



ORDER NUMBER: **L-DF40-4UD-P-Z**

KEY BENEFITS

Die-cast (grade of aluminum) Aluminum with clear / frosted polycarbonate lens, utilizing stainless steel hardware. Energy Star rated.

- Citizen® COB LED's and YG® driver technology
- Dimming option available
- Precision die cast
- Easy Installation
- IP66 rated fixture for outdoor use
- Chip and fade resistant powder coat finish in any color
- Highly efficient optics and reflector
- Multiple lens options for variety of applications
- Wireguard available for vandal resistance (L-SM40 Only)

APPLICATIONS

Ideal for driveways adjacent to buildings and outside warehousing

CERTIFICATIONS

• DLC 4.1 Premium • cUL-us Listed



* Please refer to the DLC QPL website for the latest and most complete info www.designlights.org/QPL


PRODUCT PERFORMANCE

SYSTEM WATTAGE	LED WATTAGE	LUMENS	LP/W	CRI	REPLACES (MH)
40W	36W	4473 lm	118 lm/w	≥70	100W


PRODUCT SUMMARY

EFFICACY	>118 lm/w
LED CHIP	Citizen COB LED's
CCT	4000K
DRIVER	Dimmable LED power supplies, Current can be adjusted The 0-10V Dimming type is continuous, The product can dim to 10%
DRIVER EFFICIENCY	>85%
DIMENSIONS	10.53in x 5in x 4.52in
WEIGHT	6.61 lbs
STANDARD LIFETIME	Design minimum 75,000 hours
STANDARD WARRANTY	5 Years
WATER PROOFING GRADE	IP66

PRODUCT DIMENSIONS

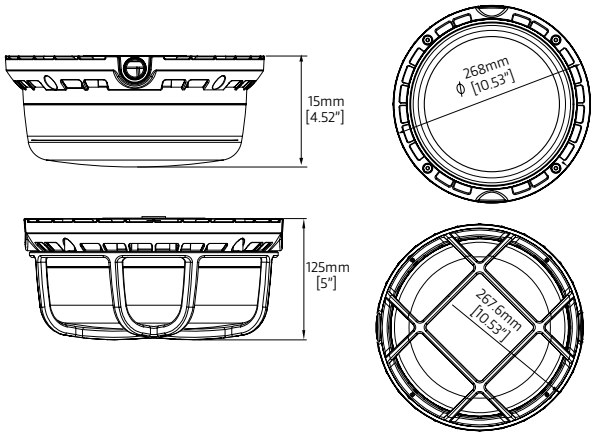

PRODUCT PHOTOMETRY



PRODUCT SPECIFICATIONS & VARIATIONS

BODY TYPE	SYSTEM WATTS	CCT	VOLTAGE	DIMMING OPTIONS	ELECTRICAL PHOTOCELL	HOUSING FINISH
L-DF	40	4	U	D	P	Z
L-DF Dragon Fly	40 = 40W	4=4000K	U = 120-277V 12 = 120V 20 = 208V 22 = 220V 24 = 240V 27 = 277V	D = Dimming	P = Photocell N = None	Z = Bronze V = Silver B = Black W = White G = Grey



DRAGON FLY

LED CEILING LIGHT
15W | 1607 LUMENS | REPLACES 50W

ORDER NUMBER: **L-DF15-4UD-P-Z**



KEY BENEFITS

Die-cast (grade of aluminum) Aluminum with clear / frosted polycarbonate lens, utilizing stainless steel hardware. Energy Star rated.

• Citizen® COB LED's and YG® driver technology • Dimming option available • Precision die cast • Easy Installation • IP66 rated fixture for outdoor use • Chip and fade resistant powder coat finish in any color • Highly efficient optics and reflector • Multiple lens options for variety of applications • Wireguard available for vandal resistance (L-SM40 Only)

APPLICATIONS

Ideal for driveways adjacent to buildings and outside warehousing

CERTIFICATIONS

• DLC 4.1 Premium • cUL-us Listed



* Please refer to the DLC QPL website for the latest and most complete info www.designlights.org/QPL



PRODUCT PERFORMANCE

SYSTEM WATTAGE	LED WATTAGE	LUMENS	LP/W	CRI	REPLACES (MH)
15W	14W	1607 lm	119 lm/w	≥80	50W

PRODUCT SUMMARY


EFFICACY	>119 lm/w
LED CHIP	Citizen COB LED's
CCT	4000K
DRIVER	Dimmable LED power supplies, Current can be adjusted The 0-10V Dimming type is continuous, The product can dim to 10%
DRIVER EFFICIENCY	>85%
DIMENSIONS	6.4in x 2.84in
WEIGHT	2.45 lbs
STANDARD LIFETIME	Design minimum 75,000 hours
STANDARD WARRANTY	5 Years
WATER PROOFING GRADE	IP66

PRODUCT DIMENSIONS

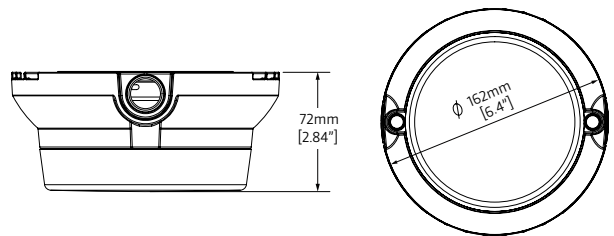

PRODUCT PHOTOMETRY

MOUNTED AT 10ft.



PRODUCT SPECIFICATIONS & VARIATIONS

BODY TYPE	SYSTEM WATTS	CCT	VOLTAGE	DIMMING OPTIONS	ELECTRICAL PHOTOCELL	HOUSING FINISH
L-DF	15	4	U	D	P	Z
L-DF Dragon Fly	15 = 15W	4=4000K	U = 120-277V 12 = 120V 20 = 208V 22 = 220V 24 = 240V 27 = 277V	D = Dimming	P = Photocell N = None	Z = Bronze V = Silver B = Black W = White G = Grey

DRAGON FLY

LED CEILING LIGHT
20W | 2128 LUMENS | REPLACES 50W

ORDER NUMBER: **L-DF20-4UD-P-Z**



KEY BENEFITS

Die-cast (grade of aluminum) Aluminum with clear / frosted polycarbonate lens, utilizing stainless steel hardware. Energy Star rated.

• Citizen® COB LED's and YG® driver technology • Dimming option available • Precision die cast • Easy Installation • IP66 rated fixture for outdoor use • Chip and fade resistant powder coat finish in any color • Highly efficient optics and reflector • Multiple lens options for variety of applications • Wireguard available for vandal resistance (L-SM40 Only)

APPLICATIONS

Ideal for driveways adjacent to buildings and outside warehousing

CERTIFICATIONS

• DLC 4.1 Premium • cUL-us Listed



* Please refer to the DLC QPL website for the latest and most complete info www.designlights.org/QPL


PRODUCT PERFORMANCE

SYSTEM WATTAGE	LED WATTAGE	LUMENS	LP/W	CRI	REPLACES (MH)
20W	18W	2128 lm	115 lm/w	≥80	50W

PRODUCT SUMMARY


EFFICACY	>115 lm/w
LED CHIP	Citizen COB LED's
CCT	4000K
DRIVER	Dimmable LED power supplies, Current can be adjusted The 0-10V Dimming type is continuous, The product can dim to 10%
DRIVER EFFICIENCY	>85%
DIMENSIONS	6.4in x 2.84in
WEIGHT	2.45 lbs
STANDARD LIFETIME	Design minimum 75,000 hours
STANDARD WARRANTY	5 Years
WATER PROOFING GRADE	IP66

PRODUCT DIMENSIONS

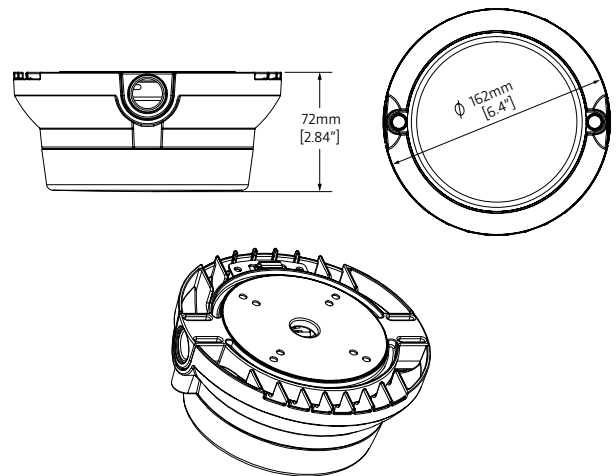

PRODUCT PHOTOMETRY

MOUNTED AT 10ft.



PRODUCT SPECIFICATIONS & VARIATIONS

BODY TYPE	SYSTEM WATTS	CCT	VOLTAGE	DIMMING OPTIONS	ELECTRICAL PHOTOCELL	HOUSING FINISH
L-DF	20	4	U	D	P	Z
L-DF Dragon Fly	20 = 20W	4=4000K	U = 120-277V 12 = 120V 20 = 208V 22 = 220V 24 = 240V 27 = 277V	D = Dimming	P = Photocell N = None	Z = Bronze V = Silver B = Black W = White G = Grey

SKYMASTER

LED GARAGE/CANOPY/POST LIGHT
40W | 4087 LUMENS | REPLACES 150W

ORDER NUMBER: **L-SM40-4UD-P-E3-PT-Z**



KEY BENEFITS

Die-cast (grade of aluminum) Aluminum with tempered glass lens or vandal resistant polycarbonate, utilizing stainless steel hardware. available in Type III, Type IV, Type V garage optics. Pendant, Surface, or post top mounting available. • Premium brand LEDs (Citizen® or CREE® COB chips depending on SKU) and YG® driver technology • Dimming option available • Surface, pendant, post-top mounts available • Precision die cast • IP66 rated fixture for outdoor use • Chip and fade resistant powder coat finish in a ny color • Prismatic Retractor • Industrial grade • Easy installation surface mount • Architectural design with excellent performance

APPLICATIONS

Ideal for driveways adjacent to buildings and outside warehousing

CERTIFICATIONS

• DLC 4.1 Premium • cUL-us Listed



* Please refer to the DLC QPL website for the latest and most complete info www.designlights.org/QPL


PRODUCT PERFORMANCE

SYSTEM WATTAGE	LED WATTAGE	LUMENS	LP/W	CRI	REPLACES (MH)
40W	36W	4087 lm	102 lm/w	≥70	150W

PRODUCT SUMMARY


EFFICACY	>102 lm/w
LED CHIP	Premium brand LEDs (Citizen® or CREE® COB chips depending on SKU)
CCT	4000K
DRIVER	Dimmable LED power supplies, Current can be adjusted The 0-10V Dimming type is continuous, The product can dim to 10%
DRIVER EFFICIENCY	>85%
DIMENSIONS	19in x 15.75in x 4.57in
WEIGHT	14.33 lbs
STANDARD LIFETIME	Design minimum 75,000 hours
STANDARD WARRANTY	5 Years
WATER PROOFING GRADE	IP66

PRODUCT DIMENSIONS

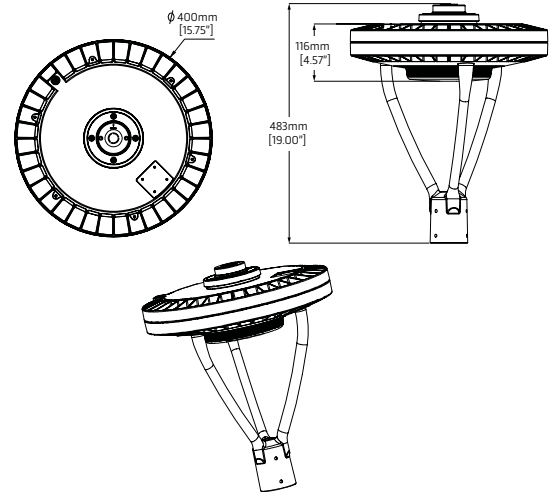

PRODUCT PHOTOMETRY

MOUNTED AT 15ft.



PRODUCT SPECIFICATIONS & VARIATIONS

BODY TYPE	SYSTEM WATTS	CCT	VOLTAGE	DIMMING OPTIONS	ELECTRICAL PHOTOCELL	ELECTRICAL OPTIC	MOUNTING	HOUSING FINISH
L-SM	40	4	U	D	P	E3	PT	Z
L-SM Skymaster	40 = 40W	4=4000K	U = 120-277V 12 = 120V 20 = 208V 22 = 220V 24 = 240V 27 = 277V 48 = 480V	D = Dimming	P = Photocell N = None	E3 = Type III E4 = Type IV 5A = Type V-A 5B = Type V-B	PT = Post Top PM = Pendant Mount CM = Ceiling Mount	Z = Bronze V = Silver B = Black W = White G = Grey

SKYMASTER

LED GARAGE/CANOPY/POST LIGHT
60W | 6192 LUMENS | REPLACES 200W

ORDER NUMBER: **L-SM60-CZ4**



KEY BENEFITS

Die-cast (grade of aluminum) Aluminum with tempered glass lens or vandal resistant polycarbonate, utilizing stainless steel hardware. available in Type III, Type IV, Type V garage optics. Pendant, Surface, or post top mounting available. • Premium brand LEDs (Citizen® or CREE® COB chips depending on SKU) and YG® driver technology • Dimming option available • Surface, pendant, post-top mounts available • Precision die cast • IP66 rated fixture for outdoor use • Chip and fade resistant powder coat finish in a ny color • Prismatic Retractor • Industrial grade • Easy installation surface mount • Architectural design with excellent performance

APPLICATIONS

Ideal for driveways adjacent to buildings and outside warehousing

CERTIFICATIONS

• DLC 4.1 Premium • cUL-us Listed



* Please refer to the DLC QPL website for the latest and most complete info www.designlights.org/QPL


PRODUCT PERFORMANCE

SYSTEM WATTAGE	LED WATTAGE	LUMENS	LP/W	CRI	REPLACES (MH)
60W	54W	6192 lm	103 lm/w	≥70	200W

PRODUCT SUMMARY


EFFICACY	>103 lm/w
LED CHIP	Premium brand LEDs (Citizen® or CREE® COB chips depending on SKU)
CCT	4000K
DRIVER	Dimmable LED power supplies, Current can be adjusted The 0-10V Dimming type is continuous, The product can dim to 10%
DRIVER EFFICIENCY	>85%
DIMENSIONS	19in x 15.75in x 4.57in
WEIGHT	14.33 lbs
STANDARD LIFETIME	Design minimum 75,000 hours
STANDARD WARRANTY	5 Years
WATER PROOFING GRADE	IP66

PRODUCT DIMENSIONS

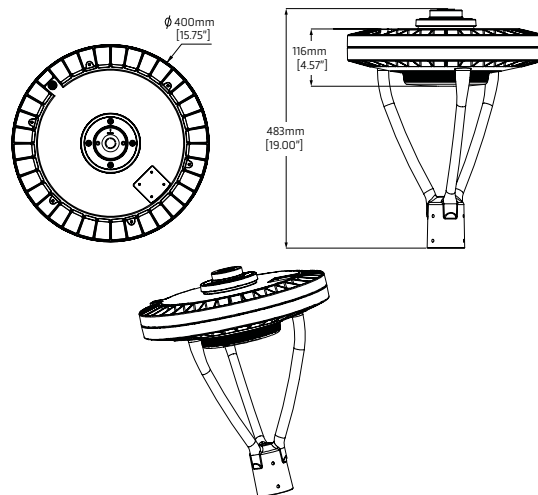

PRODUCT PHOTOMETRY

MOUNTED AT 15ft.



PRODUCT SPECIFICATIONS & VARIATIONS

BODY TYPE	SYSTEM WATTS	CCT	VOLTAGE	DIMMING OPTIONS	ELECTRICAL PHOTOCELL	ELECTRICAL OPTIC	MOUNTING	HOUSING FINISH
L-SM	60	4	U	D	P	E3	PT	Z
L-SM Skymaster	60 = 60W	4=4000K	U = 120-277V 12 = 120V 20 = 208V 22 = 220V 24 = 240V 27 = 277V 48 = 480V	D = Dimming	P = Photocell N = None	E3 = Type III E4 = Type IV 5A = Type V-A 5B = Type V-B	PT = Post Top PM = Pendant Mount CM = Ceiling Mount	Z = Bronze V = Silver B = Black W = White G = Grey

SKYMASTER

LED GARAGE/CANOPY/POST LIGHT
80W | 8080 LUMENS | REPLACES 250W

ORDER NUMBER: **L-SM80-4UD-P-E3-PT-Z**



IP66

KEY BENEFITS

Die-cast (grade of aluminum) Aluminum with tempered glass lens or vandal resistant polycarbonate, utilizing stainless steel hardware. available in Type III, Type IV, Type V garage optics. Pendant, Surface, or post top mounting available. • Premium brand LEDs (Citizen® or CREE® COB chips depending on SKU) and YG® driver technology • Dimming option available • Surface, pendant, post-top mounts available • Precision die cast • IP66 rated fixture for outdoor use • Chip and fade resistant powder coat finish in a ny color • Prismatic Retractor • Industrial grade • Easy installation surface mount • Architectural design with excellent performance

APPLICATIONS

Ideal for driveways adjacent to buildings and outside warehousing

CERTIFICATIONS

• DLC 4.1 Premium • cUL-us Listed



* Please refer to the DLC QPL website for the latest and most complete info www.designlights.org/QPL


PRODUCT PERFORMANCE

SYSTEM WATTAGE	LED WATTAGE	LUMENS	LP/W	CRI	REPLACES (MH)
80W	70W	8080 lm	101 lm/w	≥70	250W

PRODUCT SUMMARY


EFFICACY	>101 lm/w
LED CHIP	Premium brand LEDs (Citizen® or CREE® COB chips depending on SKU)
CCT	4000K
DRIVER	Dimmable LED power supplies, Current can be adjusted The 0-10V Dimming type is continuous, The product can dim to 10%
DRIVER EFFICIENCY	>85%
DIMENSIONS	19in x 15.75in x 4.57in
WEIGHT	14.33 lbs
STANDARD LIFETIME	Design minimum 75,000 hours
STANDARD WARRANTY	5 Years
WATER PROOFING GRADE	IP66

PRODUCT DIMENSIONS

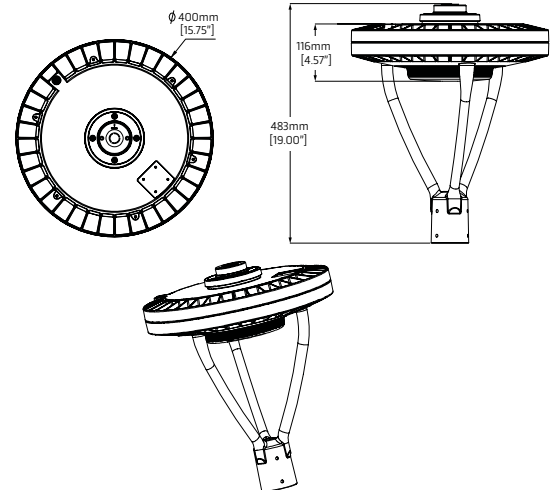

PRODUCT PHOTOMETRY

MOUNTED AT 15ft.



PRODUCT SPECIFICATIONS & VARIATIONS

BODY TYPE	SYSTEM WATTS	CCT	VOLTAGE	DIMMING OPTIONS	ELECTRICAL PHOTOCELL	ELECTRICAL OPTIC	MOUNTING	HOUSING FINISH
L-SM	80	4	U	D	P	E3	PT	Z
L-SM Skymaster	80 = 80W	4=4000K	U = 120-277V 12 = 120V 20 = 208V 22 = 220V 24 = 240V 27 = 277V 48 = 480V	D = Dimming	P = Photocell N = None	E3 = Type III E4 = Type IV 5A = Type V-A 5B = Type V-B	PT = Post Top PM = Pendant Mount CM = Ceiling Mount	Z = Bronze V = Silver B = Black W = White G = Grey

SKYMASTER

LED GARAGE/CANOPY/POST LIGHT
115W | 11615 LUMENS | REPLACES 400W

ORDER NUMBER: **L-SM115-4UD-P-E3-PT-Z**



IP66

KEY BENEFITS

Die-cast (grade of aluminum) Aluminum with tempered glass lens or vandal resistant polycarbonate, utilizing stainless steel hardware. available in Type III, Type IV, Type V garage optics. Pendant, Surface, or post top mounting available. • Premium brand LEDs (Citizen® or CREE® COB chips depending on SKU) and YG® driver technology • Dimming option available • Surface, pendant, post-top mounts available • Precision die cast • IP66 rated fixture for outdoor use • Chip and fade resistant powder coat finish in a ny color • Prismatic Retractor • Industrial grade • Easy installation surface mount • Architectural design with excellent performance

APPLICATIONS

Ideal for driveways adjacent to buildings and outside warehousing

CERTIFICATIONS

• DLC 4.1 Premium • cUL-us Listed



* Please refer to the DLC QPL website for the latest and most complete info www.designlights.org/QPL


PRODUCT PERFORMANCE

SYSTEM WATTAGE	LED WATTAGE	LUMENS	LP/W	CRI	REPLACES (MH)
115W	102W	11615 lm	101 lm/w	≥70	400W

PRODUCT SUMMARY


EFFICACY	>101 lm/w
LED CHIP	Premium brand LEDs (Citizen® or CREE® COB chips depending on SKU)
CCT	4000K
DRIVER	Dimmable LED power supplies, Current can be adjusted The 0-10V Dimming type is continuous, The product can dim to 10%
DRIVER EFFICIENCY	>85%
DIMENSIONS	19in x 15.75in x 4.57in
WEIGHT	14.33 lbs
STANDARD LIFETIME	Design minimum 75,000 hours
STANDARD WARRANTY	5 Years
WATER PROOFING GRADE	IP66

PRODUCT DIMENSIONS

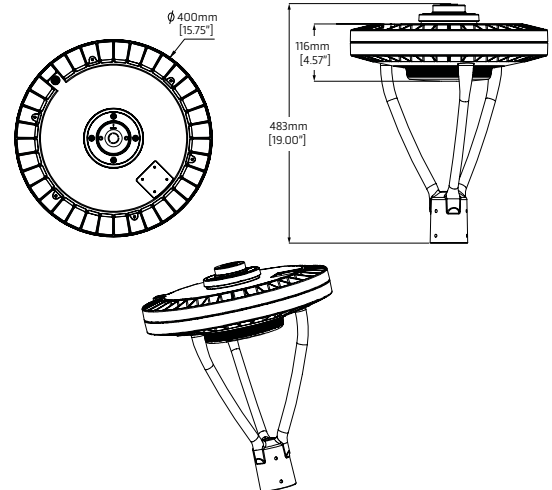

PRODUCT PHOTOMETRY

MOUNTED AT 15ft.



PRODUCT SPECIFICATIONS & VARIATIONS

BODY TYPE	SYSTEM WATTS	CCT	VOLTAGE	DIMMING OPTIONS	ELECTRICAL PHOTOCELL	ELECTRICAL OPTIC	MOUNTING	HOUSING FINISH
L-SM	115	4	U	D	P	E3	PT	Z
L-SM Skymaster	115 = 115W	4=4000K	U = 120-277V 12 = 120V 20 = 208V 22 = 220V 24 = 240V 27 = 277V 48 = 480V	D = Dimming	P = Photocell N = None	E3 = Type III E4 = Type IV 5A = Type V-A 5B = Type V-B	PT = Post Top PM = Pendant Mount CM = Ceiling Mount	Z = Bronze V = Silver B = Black W = White G = Grey

SKYMASTER

LED GARAGE/CANOPY/POST LIGHT
40W | 4640 LUMENS | REPLACES 150W

ORDER NUMBER: **L-SM40-4UD-P-E3-PT-Z**



KEY BENEFITS

Die-cast (grade of aluminum) Aluminum with tempered glass lens or vandal resistant polycarbonate, utilizing stainless steel hardware. available in Type III, Type IV, Type V garage optics. Pendant, Surface, or post top mounting available. • Premium brand LEDs (Citizen® or CREE® COB chips depending on SKU) and YG® driver technology • Dimming option available • Surface, pendant, post-top mounts available • Precision die cast • IP66 rated fixture for outdoor use • Chip and fade resistant powder coat finish in a ny color • Prismatic Retractor • Industrial grade • Easy installation surface mount • Architectural design with excellent performance

APPLICATIONS

Ideal for driveways adjacent to buildings and outside warehousing

CERTIFICATIONS

• DLC 4.1 Premium • cUL-us Listed



* Please refer to the DLC QPL website for the latest and most complete info www.designlights.org/QPL


PRODUCT PERFORMANCE

SYSTEM WATTAGE	LED WATTAGE	LUMENS	LP/W	CRI	REPLACES (MH)
40W	36W	4640 lm	116 lm/w	≥70	150W

PRODUCT SUMMARY


EFFICACY	>116 lm/w
LED CHIP	Premium brand LEDs (Citizen® or CREE® COB chips depending on SKU)
CCT	4000K
DRIVER	Dimmable LED power supplies, Current can be adjusted The 0-10V Dimming type is continuous, The product can dim to 10%
DRIVER EFFICIENCY	>85%
DIMENSIONS	15.75in x 4.87in x 3.47in
WEIGHT	14.33 lbs
STANDARD LIFETIME	Design minimum 75,000 hours
STANDARD WARRANTY	5 Years
WATER PROOFING GRADE	IP66

PRODUCT DIMENSIONS

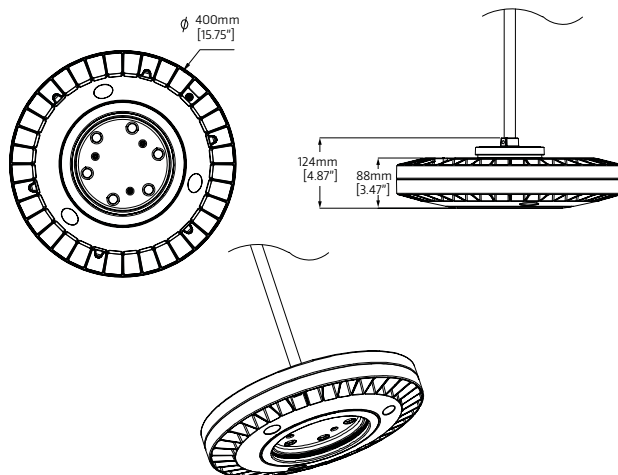

PRODUCT PHOTOMETRY

MOUNTED AT 15ft.



PRODUCT SPECIFICATIONS & VARIATIONS

BODY TYPE	SYSTEM WATTS	CCT	VOLTAGE	DIMMING OPTIONS	ELECTRICAL PHOTOCELL	ELECTRICAL OPTIC	MOUNTING	HOUSING FINISH
L-SM	40	4	U	D	P	E3	PT	Z
L-SM Skymaster	40 = 40W	4=4000K	U = 120-277V 12 = 120V 20 = 208V 22 = 220V 24 = 240V 27 = 277V 48 = 480V	D = Dimming	P = Photocell N = None	E3 = Type III E4 = Type IV 5A = Type V-A 5B = Type V-B	PT = Post Top PM = Pendant Mount CM = Ceiling Mount	Z = Bronze V = Silver B = Black W = White G = Grey

COMMANDO

LED GARAGE/CANOPY LIGHT
35W | 3885 LUMENS | REPLACES 175W

ORDER NUMBER: **L-C035-4UD-P-Z**



KEY BENEFITS

- Same footprint as traditional HID garage and canopy lights
- Premium brand LEDs (Samsung® or LG® chips depending on SKU) YG® driver technology
- Dimming option available
- Suitable for wet locations
- Precision die cast
- Chip and fade resistant powder coat finish in any color
- Prismatic Retractor
- Industrial grade.

APPLICATIONS

Ideal for driveways adjacent to buildings and outside warehousing

CERTIFICATIONS

- DLC 4.1 Premium
- cUL-us Listed



* Please refer to the DLC QPL website for the latest and most complete info www.designlights.org/QPL


PRODUCT PERFORMANCE

SYSTEM WATTAGE	LED WATTAGE	LUMENS	LP/W	CRI	REPLACES (MH)
35W	30W	3885 lm	111 lm/w	≥80	175W


PRODUCT SUMMARY

EFFICACY	>111 lm/w
LED CHIP	Premium brand LEDs (Samsung® or LG® chips depending on SKU)
CCT	4000K
DRIVER	Dimmable LED power supplies, Current can be adjusted The 0-10V Dimming type is continuous, The product can dim to 10%
DRIVER EFFICIENCY	>85%
DIMENSIONS	12.4in x 8.8in x 3.7in
WEIGHT	8.15 lbs
STANDARD LIFETIME	Design minimum 75,000 hours
STANDARD WARRANTY	5 Years
WATER PROOFING GRADE	IP65

PRODUCT DIMENSIONS

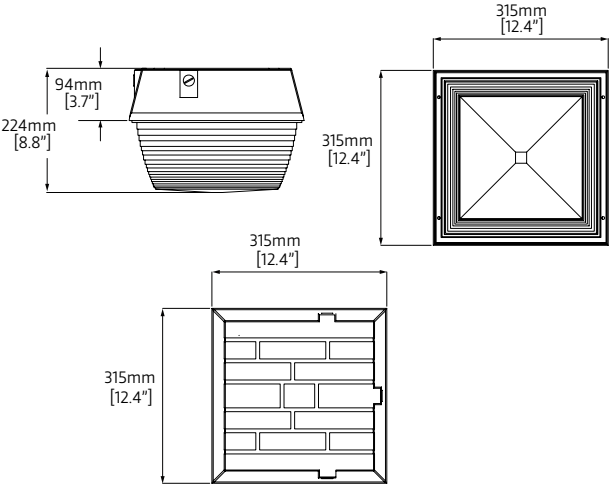

PRODUCT PHOTOMETRY



PRODUCT SPECIFICATIONS & VARIATIONS

BODY TYPE	SYSTEM WATTS	CCT	VOLTAGE	DIMMING OPTIONS	ELECTRICAL PHOTOCELL	HOUSING FINISH
L-CO	35	4	U	D	P	Z
L-CO Commando	35 = 35W	4=4000K	U = 120-277V 12 = 120V 20 = 208V 22 = 220V 24 = 240V 27 = 277V 34 = 347V 48 = 480V	D = Dimming	P = Photocell N = None	Z = Bronze V = Silver B = Black W = White G = Grey

COMMANDO

LED GARAGE/CANOPY LIGHT
50W | 5550 LUMENS | REPLACES 175W

ORDER NUMBER: **L-C050-DZ4**



KEY BENEFITS

- Same footprint as traditional HID garage and canopy lights
- Premium brand LEDs (Samsung® or LG® chips depending on SKU) YG® driver technology
- Dimming option available
- Suitable for wet locations
- Precision die cast
- Chip and fade resistant powder coat finish in any color
- Prismatic Retractor
- Industrial grade.

APPLICATIONS

Ideal for driveways adjacent to buildings and outside warehousing

CERTIFICATIONS

- DLC 4.1 Premium
- cUL-us Listed



* Please refer to the DLC QPL website for the latest and most complete info www.designlights.org/QPL


PRODUCT PERFORMANCE

SYSTEM WATTAGE	LED WATTAGE	LUMENS	LP/W	CRI	REPLACES (MH)
50W	45W	5550 lm	111 lm/w	≥80	175W


PRODUCT SUMMARY

EFFICACY	>111 lm/w
LED CHIP	Premium brand LEDs (Samsung® or LG® chips depending on SKU)
CCT	4000K
DRIVER	Dimmable LED power supplies, Current can be adjusted The 0-10V Dimming type is continuous, The product can dim to 10%
DRIVER EFFICIENCY	>85%
DIMENSIONS	12.4in x 8.8in x 3.7in
WEIGHT	8.15 lbs
STANDARD LIFETIME	Design minimum 75,000 hours
STANDARD WARRANTY	5 Years
WATER PROOFING GRADE	IP65

PRODUCT DIMENSIONS

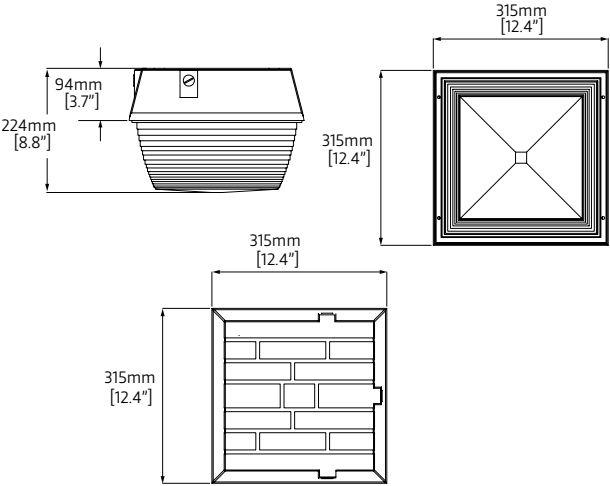

PRODUCT PHOTOMETRY



PRODUCT SPECIFICATIONS & VARIATIONS

BODY TYPE	SYSTEM WATTS	CCT	VOLTAGE	DIMMING OPTIONS	ELECTRICAL PHOTOCELL	HOUSING FINISH
L-CO	50	4	U	D	P	Z
L-CO Commando	350 = 50W	4=4000K	U = 120-277V 12 = 120V 20 = 208V 22 = 220V 24 = 240V 27 = 277V 34 = 347V 48 = 480V	D = Dimming	P = Photocell N = None	Z = Bronze V = Silver B = Black W = White G = Grey



COMMANDO

LED GARAGE/CANOPY LIGHT
70W | 7841 LUMENS | REPLACES 200W

ORDER NUMBER: **L-C070-4UD-P-Z**



KEY BENEFITS

- Same footprint as traditional HID garage and canopy lights
- Premium brand LEDs (Samsung® or LG® chips depending on SKU) YG® driver technology
- Dimming option available
- Suitable for wet locations
- Precision die cast
- Chip and fade resistant powder coat finish in any color
- Prismatic Retractor
- Industrial grade.

APPLICATIONS

Ideal for driveways adjacent to buildings and outside warehousing

CERTIFICATIONS

- DLC 4.1 Premium
- cUL-us Listed



* Please refer to the DLC QPL website for the latest and most complete info www.designlights.org/QPL

PRODUCT PERFORMANCE

SYSTEM WATTAGE	LED WATTAGE	LUMENS	LP/W	CRI	REPLACES (MH)
70W	62W	7841 lm	112 lm/w	≥80	200W


PRODUCT SUMMARY

EFFICACY	>112 lm/w
LED CHIP	Premium brand LEDs (Samsung® or LG® chips depending on SKU)
CCT	4000K
DRIVER	Dimmable LED power supplies, Current can be adjusted The 0-10V Dimming type is continuous, The product can dim to 10%
DRIVER EFFICIENCY	>85%
DIMENSIONS	12.4in x 8.8in x 3.7in
WEIGHT	8.15 lbs
STANDARD LIFETIME	Design minimum 75,000 hours
STANDARD WARRANTY	5 Years
WATER PROOFING GRADE	IP65


PRODUCT SPECIFICATIONS & VARIATIONS

BODY TYPE	SYSTEM WATTS	CCT	VOLTAGE	DIMMING OPTIONS	ELECTRICAL PHOTOCELL	HOUSING FINISH
L-CO	70	4	U	D	P	Z
L-CO Commando	70 = 70W	4=4000K	U = 120-277V 12 = 120V 20 = 208V 22 = 220V 24 = 240V 27 = 277V 34 = 347V 48 = 480V	D = Dimming	P = Photocell N = None	Z = Bronze V = Silver B = Black W = White G = Grey

PRODUCT DIMENSIONS

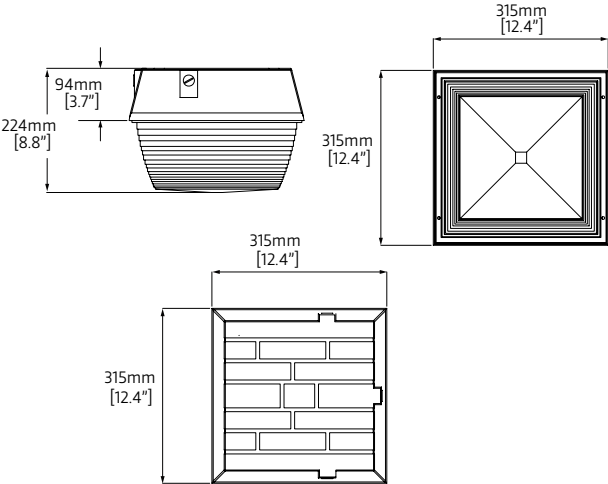

PRODUCT PHOTOMETRY



COMMANDO

LED GARAGE/CANOPY LIGHT
20W | 1878 LUMENS | REPLACES 100W

ORDER NUMBER: L-C020-DZ4



KEY BENEFITS

- Same footprint as traditional HID garage and canopy lights
- Premium brand LEDs (Samsung® or LG® chips depending on SKU) YG® driver technology
- Dimming option available
- Suitable for wet locations
- Precision die cast
- Chip and fade resistant powder coat finish in any color
- Prismatic Retractor
- Industrial grade.

APPLICATIONS

Ideal for driveways adjacent to buildings and outside warehousing

CERTIFICATIONS

- DLC 4.1 Premium
- cUL-us Listed



* Please refer to the DLC QPL website for the latest and most complete info www.designlights.org/QPL

PRODUCT PERFORMANCE

SYSTEM WATTAGE	LED WATTAGE	LUMENS	LP/W	CRI	REPLACES (MH)
20W	18W	1878 lm	102 lm/w	≥80	100W


PRODUCT SUMMARY

EFFICACY	>102 lm/w
LED CHIP	Premium brand LEDs (Samsung® or LG® chips depending on SKU)
CCT	4000K
DRIVER	Dimmable LED power supplies, Current can be adjusted The 0-10V Dimming type is continuous, The product can dim to 10%
DRIVER EFFICIENCY	>85%
DIMENSIONS	8.9in x 7.3in x 7.3in
WEIGHT	6.06 lbs
STANDARD LIFETIME	Design minimum 75,000 hours
STANDARD WARRANTY	5 Years
WATER PROOFING GRADE	IP65

PRODUCT SPECIFICATIONS & VARIATIONS


BODY TYPE	SYSTEM WATTS	CCT	VOLTAGE	DIMMING OPTIONS	ELECTRICAL PHOTOCELL	HOUSING FINISH
L-CO	20	4	U	D	P	Z
L-CO Commando	20 = 20W	4=4000K	U = 120-277V 12 = 120V 20 = 208V 22 = 220V 24 = 240V 27 = 277V 34 = 347V 48 = 480V	D = Dimming	P = Photocell N = None	Z = Bronze V = Silver B = Black W = White G = Grey

PRODUCT DIMENSIONS

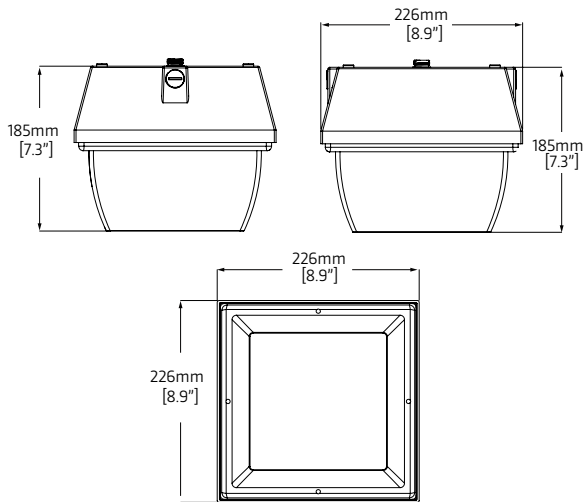

PRODUCT PHOTOMETRY

MOUNTED AT 10ft.



BELL

LED GARAGE/CANOPY LIGHT 20W | 1653 LUMENS | REPLACES 100W

ORDER NUMBER: **L-BL20-WWU-D4Z**



KEY BENEFITS

- Same footprint as traditional HID garage and canopy lights
- Premium brand LEDs (Samsung® or LG® chips depending on SKU) YG® driver technology
- Dimming option available
- Suitable for wet locations
- Precision die cast
- Chip and fade resistant powder coat finish in any color
- Prismatic Retractor
- Industrial grade.

APPLICATIONS

Ideal for driveways adjacent to buildings and outside warehousing

CERTIFICATIONS

• DLC 4.1 Premium • cUL-us Listed



* Please refer to the DLC QPL website for the latest and most complete info www.designlights.org/QPL

PRODUCT PERFORMANCE

SYSTEM WATTAGE	LED WATTAGE	LUMENS	LP/W	CRI	REPLACES (MH)
20W	18W	1653 lm	89 lm/w	≥80	100W


PRODUCT SUMMARY

EFFICACY	>89 lm/w
LED CHIP	Premium brand LEDs (Samsung® or LG® chips depending on SKU)
CCT	4000K
DRIVER	Dimmable LED power supplies, Current can be adjusted The 0-10V Dimming type is continuous, The product can dim to 10%
DRIVER EFFICIENCY	>85%
DIMENSIONS	9.13 x 8.86 x 4.65
WEIGHT	4.4 lbs
STANDARD LIFETIME	Design minimum 75,000 hours
STANDARD WARRANTY	5 Years
WATER PROOFING GRADE	IP65

PRODUCT SPECIFICATIONS & VARIATIONS


BODY TYPE	SYSTEM WATTS	CCT	VOLTAGE	DIMMING OPTIONS	ELECTRICAL PHOTOCELL	HOUSING FINISH
L-BE	20	4	U	D	P	Z
L-BE Bell	20 = 20W	4=4000K	U = 120-277V 12 = 120V 20 = 208V 22 = 220V 24 = 240V 27 = 277V 34 = 347V 48 = 480V	D = Dimming	P = Photocell N = None	Z = Bronze V = Silver B = Black W = White G = Grey

PRODUCT DIMENSIONS

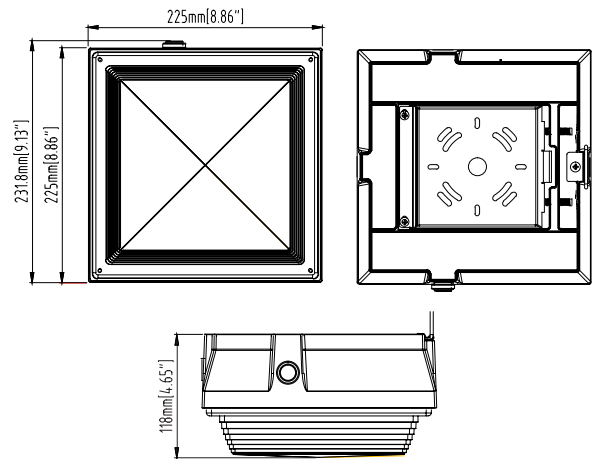

PRODUCT PHOTOMETRY

MOUNTED AT 10ft.



BELL

LED GARAGE/CANOPY LIGHT 35W | 2966 LUMENS | REPLACES 175W

ORDER NUMBER: **L-BL35-WWU-D4Z**



KEY BENEFITS

- Same footprint as traditional HID garage and canopy lights • Premium brand LEDs (Samsung® or LG® chips depending on SKU) YG® driver technology
- Dimming option available • Suitable for wet locations • Precision die cast • Chip and fade resistant powder coat finish in any color • Prismatic Retractor
- Industrial grade.

APPLICATIONS

Ideal for driveways adjacent to buildings and outside warehousing

CERTIFICATIONS

- DLC 4.1 Premium • cUL-us Listed



* Please refer to the DLC QPL website for the latest and most complete info www.designlights.org/QPL


PRODUCT PERFORMANCE

SYSTEM WATTAGE	LED WATTAGE	LUMENS	LP/W	CRI	REPLACES (MH)
35W	30W	2966 lm	89 lm/w	≥80	175W


PRODUCT SUMMARY

EFFICACY	>89 lm/w
LED CHIP	Premium brand LEDs (Samsung® or LG® chips depending on SKU)
CCT	4000K
DRIVER	Dimmable LED power supplies, Current can be adjusted The 0-10V Dimming type is continuous, The product can dim to 10%
DRIVER EFFICIENCY	>85%
DIMENSIONS	9.13 x 8.86 x 4.65
WEIGHT	7.6 lbs
STANDARD LIFETIME	Design minimum 75,000 hours
STANDARD WARRANTY	5 Years
WATER PROOFING GRADE	IP65

PRODUCT DIMENSIONS

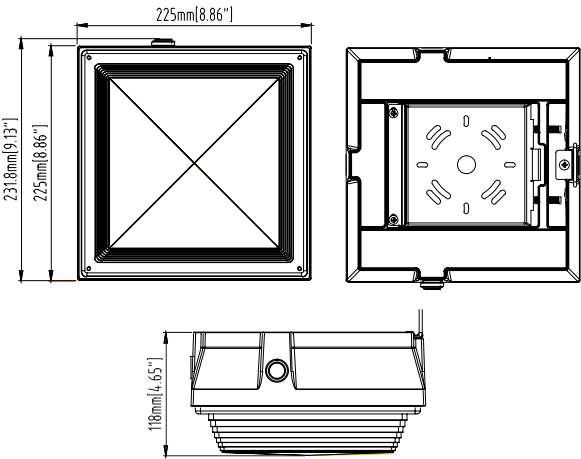

PRODUCT PHOTOMETRY



PRODUCT SPECIFICATIONS & VARIATIONS

BODY TYPE	SYSTEM WATTS	CCT	VOLTAGE	DIMMING OPTIONS	ELECTRICAL PHOTOCELL	HOUSING FINISH
L-CO	35	4	U	D	P	Z
L-CO Commando	35 = 35W	4=4000K	U = 120-277V 12 = 120V 20 = 208V 22 = 220V 24 = 240V 27 = 277V 34 = 347V 48 = 480V	D = Dimming	P = Photocell N = None	Z = Bronze V = Silver B = Black W = White G = Grey

BELL

LED GARAGE/CANOPY LIGHT 70W | 5806 LUMENS | REPLACES 175W

ORDER NUMBER: **L-BL70-WWU-D4Z**



KEY BENEFITS

- Same footprint as traditional HID garage and canopy lights • Premium brand LEDs (Samsung® or LG® chips depending on SKU) YG® driver technology
- Dimming option available • Suitable for wet locations • Precision die cast • Chip and fade resistant powder coat finish in any color • Prismatic Retractor
- Industrial grade.

APPLICATIONS

Ideal for driveways adjacent to buildings and outside warehousing

CERTIFICATIONS

- DLC 4.1 Premium • cUL-us Listed



* Please refer to the DLC QPL website for the latest and most complete info www.designlights.org/QPL


PRODUCT PERFORMANCE

SYSTEM WATTAGE	LED WATTAGE	LUMENS	LP/W	CRI	REPLACES (MH)
70W	62W	2966 lm	86 lm/w	≥80	175W


PRODUCT SUMMARY

EFFICACY	>86 lm/w
LED CHIP	Premium brand LEDs (Samsung® or LG® chips depending on SKU)
CCT	4000K
DRIVER	Dimmable LED power supplies, Current can be adjusted The 0-10V Dimming type is continuous, The product can dim to 10%
DRIVER EFFICIENCY	>85%
DIMENSIONS	9.13 x 8.86 x 4.65
WEIGHT	7.6 lbs
STANDARD LIFETIME	Design minimum 75,000 hours
STANDARD WARRANTY	5 Years
WATER PROOFING GRADE	IP65

PRODUCT DIMENSIONS

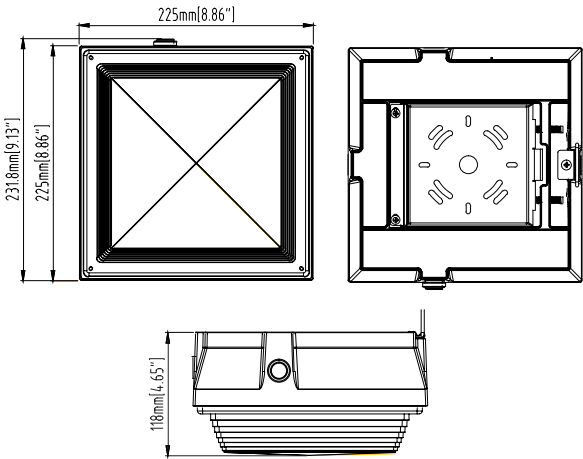

PRODUCT PHOTOMETRY



PRODUCT SPECIFICATIONS & VARIATIONS

BODY TYPE	SYSTEM WATTS	CCT	VOLTAGE	DIMMING OPTIONS	ELECTRICAL PHOTOCELL	HOUSING FINISH
L-CO	70	4	U	D	P	Z
L-CO Commando	70 = 70W	4=4000K	U = 120-277V 12 = 120V 20 = 208V 22 = 220V 24 = 240V 27 = 277V 34 = 347V 48 = 480V	D = Dimming	P = Photocell N = None	Z = Bronze V = Silver B = Black W = White G = Grey

LED SPECIALTY LIGHTS

TANKER

LED MULTI-PURPOSE LIGHT
14W | 1193 LUMENS | REPLACES 100W

ORDER NUMBER: **L-TK14-4UD-T1-Z**

IP66



KEY BENEFITS

• Philips® Lumileds LED's and YG® driver technology • Individual optics for controlled beam • Precision die cast • Optional Wall mount arm with different lengths (42" and 60") • IP66 rated fixture for outdoor use • Chip and fade resistant powder coat finish in any color

APPLICATIONS

Ideal for driveways adjacent to buildings and outside warehousing

CERTIFICATIONS

• DLC 4.1 Premium • cUL-us Listed



* Please refer to the DLC QPL website for the latest and most complete info www.designlights.org/QPL


PRODUCT PERFORMANCE

SYSTEM WATTAGE	LED WATTAGE	LUMENS	LP/W	CRI	REPLACES (MH)
14W	13W	1193 lm	85 lm/w	≥65	100W


PRODUCT SUMMARY

EFFICACY	>85 lm/w
LED CHIP	Philips® Lumileds LED's
CCT	4000K
DRIVER	Dimmable LED power supplies, Current can be adjusted The 0-10V Dimming type is continuous, The product can dim to 10%
DRIVER EFFICIENCY	>85%
DIMENSIONS	7.5in x 5.9in x 1.55in
WEIGHT	4.46 lbs
STANDARD LIFETIME	Design minimum 75,000 hours
STANDARD WARRANTY	5 Years
WATER PROOFING GRADE	IP66

PRODUCT DIMENSIONS

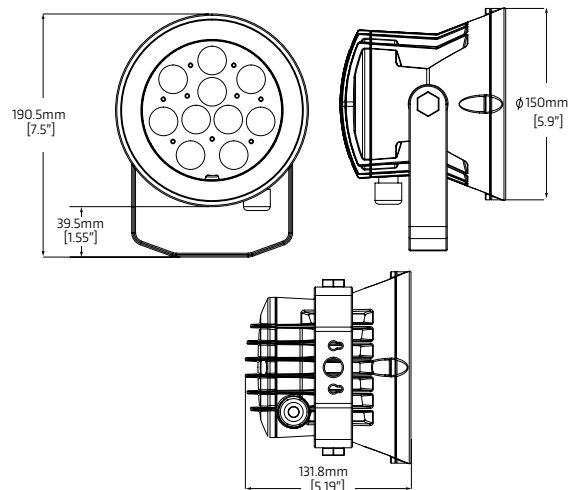

PRODUCT PHOTOMETRY



PRODUCT SPECIFICATIONS & VARIATIONS

BODY TYPE	SYSTEM WATTS	CCT	VOLTAGE	DIMMING OPTIONS	MOUNTING	HOUSING FINISH
L-TK	14	4	U	D	T1	Z
L-TK Tanker	14 = 14W	4=4000K	U = 120-277V 12 = 120V	D = Dimming	T1 = 60" ARM T2 = 42" ARM NA = None	Z = Bronze V = Silver B = Black W = White G = Grey

TANKER

LED MULTI-PURPOSE LIGHT
18W | 1568 LUMENS | REPLACES 100W

ORDER NUMBER: **L-TK18-4UD-T1-Z**



KEY BENEFITS

• Philips® Lumileds LED's and YG® driver technology • Individual optics for controlled beam • Precision die cast • Optional Wall mount arm with different lengths (42" and 60") • IP66 rated fixture for outdoor use • Chip and fade resistant powder coat finish in any color

APPLICATIONS

Ideal for driveways adjacent to buildings and outside warehousing

CERTIFICATIONS

• DLC 4.1 Premium • cUL-us Listed



* Please refer to the DLC QPL website for the latest and most complete info www.designlights.org/QPL


PRODUCT PERFORMANCE

SYSTEM WATTAGE	LED WATTAGE	LUMENS	LP/W	CRI	REPLACES (MH)
18W	16W	1568 lm	88 lm/w	≥65	100W


PRODUCT SUMMARY

EFFICACY	>88 lm/w
LED CHIP	Philips® Lumileds LED's
CCT	4000K
DRIVER	Dimmable LED power supplies, Current can be adjusted The 0-10V Dimming type is continuous, The product can dim to 10%
DRIVER EFFICIENCY	>85%
DIMENSIONS	7.5in x 5.9in x 1.55in
WEIGHT	4.46 lbs
STANDARD LIFETIME	Design minimum 75,000 hours
STANDARD WARRANTY	5 Years
WATER PROOFING GRADE	IP66

PRODUCT DIMENSIONS

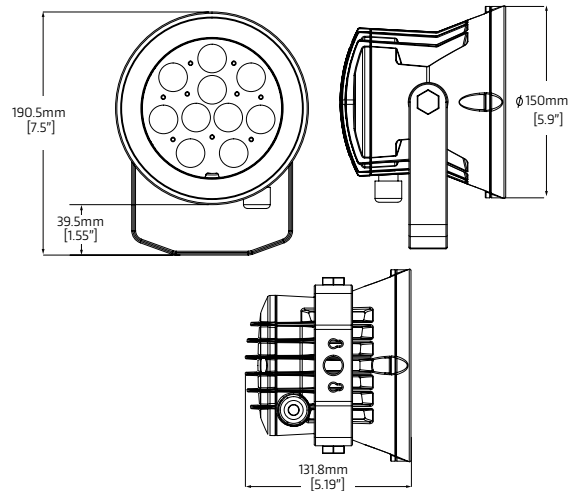

PRODUCT PHOTOMETRY



PRODUCT SPECIFICATIONS & VARIATIONS

BODY TYPE	SYSTEM WATTS	CCT	VOLTAGE	DIMMING OPTIONS	MOUNTING	HOUSING FINISH
L-TK	18	4	U	D	T1	Z
L-TK Tanker	18 = 18W	4=4000K	U = 120-277V 12 = 120V	D = Dimming	T1 = 60" ARM T2 = 42" ARM NA = None	Z = Bronze V = Silver B = Black W = White G = Grey

TANKER

LED MULTI-PURPOSE LIGHT
23W | 2386 LUMENS | REPLACES 100W

ORDER NUMBER: **L-TK23-4UD-T1-Z**



KEY BENEFITS

• Philips® Lumileds LED's and YG® driver technology • Individual optics for controlled beam • Precision die cast • Optional Wall mount arm with different lengths (42" and 60") • IP66 rated fixture for outdoor use • Chip and fade resistant powder coat finish in any color

APPLICATIONS

Ideal for driveways adjacent to buildings and outside warehousing

CERTIFICATIONS

• DLC 4.1 Premium • cUL-us Listed



* Please refer to the DLC QPL website for the latest and most complete info www.designlights.org/QPL


PRODUCT PERFORMANCE

SYSTEM WATTAGE	LED WATTAGE	LUMENS	LP/W	CRI	REPLACES (MH)
23W	20W	2386 lm	104 lm/w	≥65	100W


PRODUCT SUMMARY

EFFICACY	>104 lm/w
LED CHIP	Philips® Lumileds LED's
CCT	4000K
DRIVER	Dimmable LED power supplies, Current can be adjusted The 0-10V Dimming type is continuous, The product can dim to 10%
DRIVER EFFICIENCY	>85%
DIMENSIONS	7.5in x 5.9in x 1.55in
WEIGHT	4.46 lbs
STANDARD LIFETIME	Design minimum 75,000 hours
STANDARD WARRANTY	5 Years
WATER PROOFING GRADE	IP66

PRODUCT DIMENSIONS

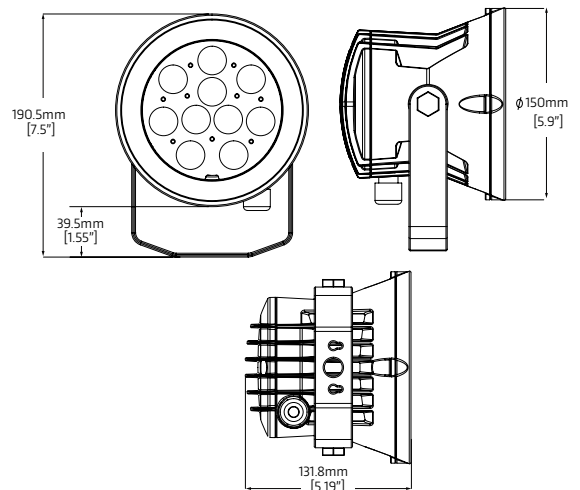

PRODUCT PHOTOMETRY

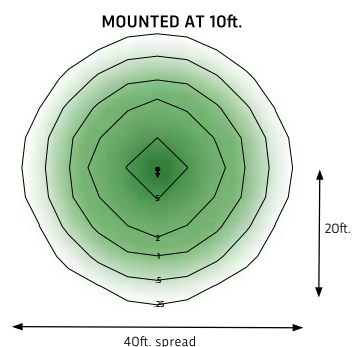

PRODUCT SPECIFICATIONS & VARIATIONS

BODY TYPE	SYSTEM WATTS	CCT	VOLTAGE	DIMMING OPTIONS	MOUNTING	HOUSING FINISH
L-TK	23	4	U	D	T1	Z
L-TK Tanker	23 = 23W	4=4000K	U = 120-277V 12 = 120V	D = Dimming	T1 = 60" ARM T2 = 42" ARM NA = None	Z = Bronze V = Silver B = Black W = White G = Grey



VAPERIZER

LED MULTI-PURPOSE LIGHT
25W | 3110 LUMENS | REPLACES 120W

ORDER NUMBER: **L-VP25-4UD-PM-S**



KEY BENEFITS

Designed for excellent thermal management • Citizen® LED's and YG® driver technology • Dimming option available • Precision die cast • Vapor proof ceiling, pendant, and wall mount available for variety of applications • Multiple lens and guard configurations available • IP66 rated fixture for outdoor use • Aluminum sand blast finish

APPLICATIONS

Ideal for driveways adjacent to buildings and outside warehousing

CERTIFICATIONS

• DLC 4.1 Premium • cUL-us Listed



* Please refer to the DLC QPL website for the latest and most complete info www.designlights.org/QPL


PRODUCT PERFORMANCE

SYSTEM WATTAGE	LED WATTAGE	LUMENS	LP/W	CRI	REPLACES (MH)
25W	22W	3110 lm	125 lm/w	≥65	120W


PRODUCT SUMMARY

EFFICACY	>125 lm/w
LED CHIP	Citizen COB LED's
CCT	4000K
DRIVER	Dimmable LED power supplies, Current can be adjusted The 0-10V Dimming type is continuous, The product can dim to 10%
DRIVER EFFICIENCY	>85%
DIMENSIONS	7.02in x 5.29in x 5.08in / 12.93in x 10.98in x 4.32in
WEIGHT	4.75 lbs
STANDARD LIFETIME	Design minimum 75,000 hours
STANDARD WARRANTY	5 Years
WATER PROOFING GRADE	IP66

PRODUCT DIMENSIONS

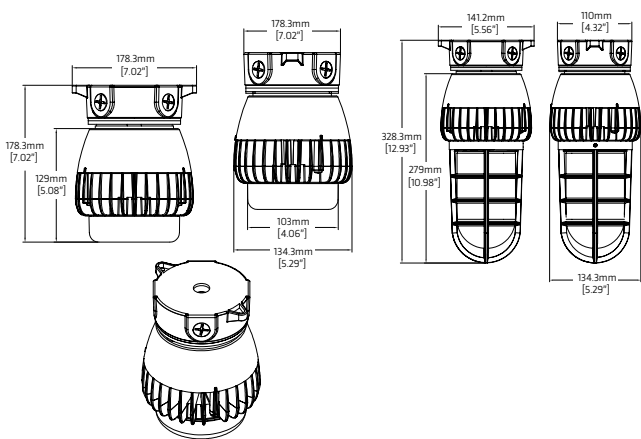

PRODUCT PHOTOMETRY



PRODUCT SPECIFICATIONS & VARIATIONS

BODY TYPE	SYSTEM WATTS	CCT	VOLTAGE	DIMMING OPTIONS	MOUNTING	HOUSING FINISH
L-VP	25	4	U	D	PM	S
L-VP Vaperizer	25 = 25W	4=4000K	U = 120-277V 12 = 120V	D = Dimming	PM = Pendant Mount CM = Ceiling Mount WM = Wall Mount	S = Sand Blast

VAPERIZER

LED MULTI-PURPOSE LIGHT
14W | 1634 LUMENS | REPLACES 120W

ORDER NUMBER: **L-VP14-4UD-PM-S**



KEY BENEFITS

Designed for excellent thermal management • Citizen® LED's and YG® driver technology • Dimming option available • Precision die cast • Vapor proof ceiling, pendant, and wall mount available for variety of applications • Multiple lens and guard configurations available • IP66 rated fixture for outdoor use • Aluminum sand blast finish

APPLICATIONS

Ideal for driveways adjacent to buildings and outside warehousing

CERTIFICATIONS

• DLC 4.1 Premium • cUL-us Listed



* Please refer to the DLC QPL website for the latest and most complete info www.designlights.org/QPL


PRODUCT PERFORMANCE

SYSTEM WATTAGE	LED WATTAGE	LUMENS	LP/W	CRI	REPLACES (MH)
14W	13W	1634 lm	117 lm/w	≥65	120W

PRODUCT SUMMARY


EFFICACY	>117 lm/w
LED CHIP	Citizen COB LED's
CCT	4000K
DRIVER	Dimmable LED power supplies, Current can be adjusted The 0-10V Dimming type is continuous, The product can dim to 10%
DRIVER EFFICIENCY	>85%
DIMENSIONS	5.46in x 4.52in x 3.50in / 11.35in x 9.22in x 3.50in
WEIGHT	2.95 lbs
STANDARD LIFETIME	Design minimum 75,000 hours
STANDARD WARRANTY	5 Years
WATER PROOFING GRADE	IP66

PRODUCT DIMENSIONS

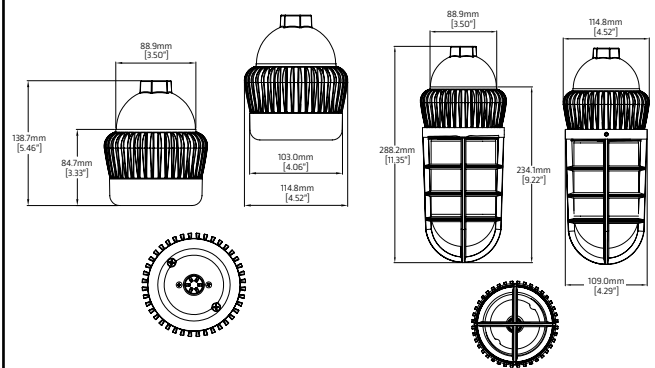

PRODUCT PHOTOMETRY

MOUNTED AT 10ft.




PRODUCT SPECIFICATIONS & VARIATIONS

BODY TYPE	SYSTEM WATTS	CCT	VOLTAGE	DIMMING OPTIONS	MOUNTING	HOUSING FINISH
L-VP	14	4	U	D	PM	S
L-VP Vaperizer	14 = 14W	4=4000K	U = 120-277V 12 = 120V	D = Dimming	PM = Pendant Mount CM = Ceiling Mount WM = Wall Mount	S = Sand Blast


STANDARD COLOR SELECTION GUIDE

Set the mood and ambiance of any outdoor environment with Lumight's fashion-forward finishes. From cool smooth aluminum tones, to Tuscan and old world earth tones, Lumight's outdoor LED fixtures have the perfect frame finish to complement a wide variety of properties. Lumights factory was one of the first to introduce the high-tech, incredibly durable powder coating process to the educated outdoor lighting industry. Today's powder coat finishes are three times as thick as paint. So rest assured, your LEDFixts LED fixture will shrug off the extreme elements , season after season, year after year.

Grey



White




Black



Bronze



Silver



GUARANTEE

5 Years/50,000 Hours

Testing & Certifications
Photometrics Corrosion
Resistance Thermal
Management Optics &
Performance Electric
Components Packaging &
drop test





www.ledfixts.com
sales@ledfixts.com