

**COMMERCIAL
POLE CATALOG**



THE FIXTS GROUP®
Energy & Industrial Solutions

2021.

POLE CONSTRUCTION

Our Aluminum poles are constructed from a seamless extruded tube of 6063 or 6061 aluminum alloy.

All our aluminum poles undergo T6 Heat Treatment to increase their strength.

Optional internal vibrating wind dampeners are available for locations with high velocity winds.

Our aluminum poles can be mounted or directly buried given their outstanding corrosion resistance.



CSA W47.1

Our Aluminum Poles are crafted with quality welding expertise certified by the Canadian Welding Bureau. Our welding capabilities match the highest international standards.

ANODIZEDCOLORS

CLEAR
NATURAL

LIGHT
BRONZE

MEDIUM
BRONZE

DARK
BRONZE

BLACK

POLE FINISHES

THERMOSETPOWDERCOLORS

DARK GREEN

GRAY

WHITE

BLACK

DARK
BRONZE

SATINBRUSHEDFINISH



SATIN BRUSHED

OTHER COLORS AND TEXTURES CAN BE PROVIDED WITH RAL NUMBERS OR COLOR CHIPS UPON REQUEST

GARDEN POLES .



LOUVRE .

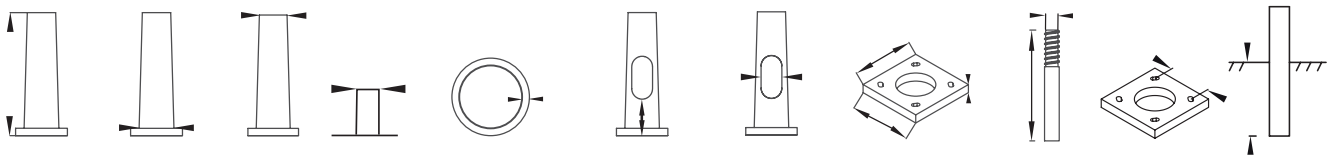
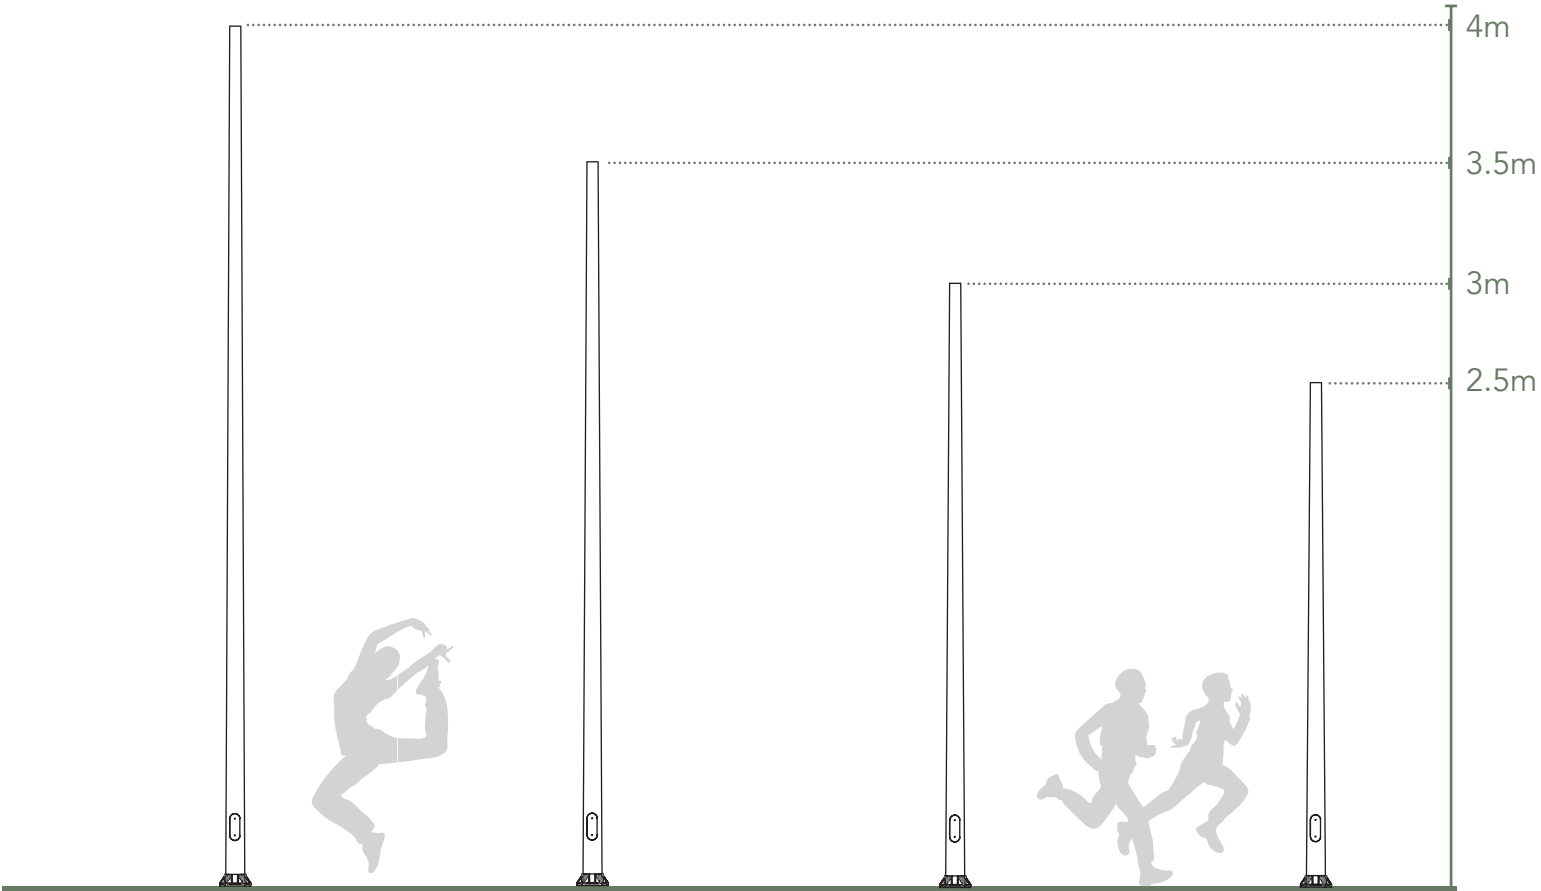


ITEM#	Height (m)	Bottom Dia (mm)	Top Dia (mm)	Tenon (mm)	Wall Thickness (mm)	Door Position (mm)	Door Size (mm)	Base Plate Size (mm)	Bolt Size (mm)	Bolt Circle (mm)	Embedding (mm)
GAP5030A-H-BS	2.5≤H≤4.0	127	76	60/76	3.0	300	250X95	230X230X55	4XM18	135	800
GAP5530A-H-BS		140	76					240X240X75	4XM18	145	
GAP6035A-H-BS		152	89					260X260X90	4XM20	170	

Catalog Number designates

Shaft Diameter At Base	Shaft Diameter At Top	Wall Thickness	Pole Hight	Surface Finish	Accessory
50=5.0"(127mm)	30=3.0"(76mm)	A=3.0mm	2.5≤H≤4.0	SB=Satin Brushed AD=Anodized PC=Powder Coating	See Accessories Section
55=5.5"(140mm)	30=3.0"(76mm)				
60=6.0"(152mm)	35=3.5"(89mm)				

ACTON .

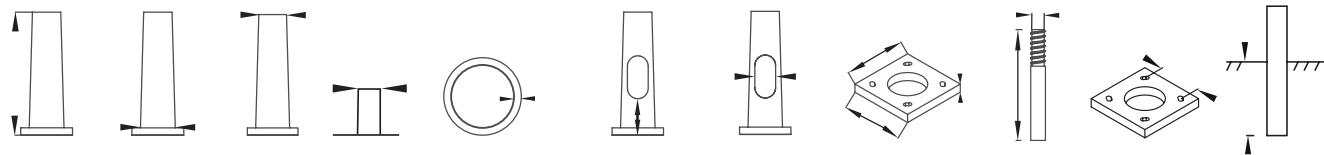
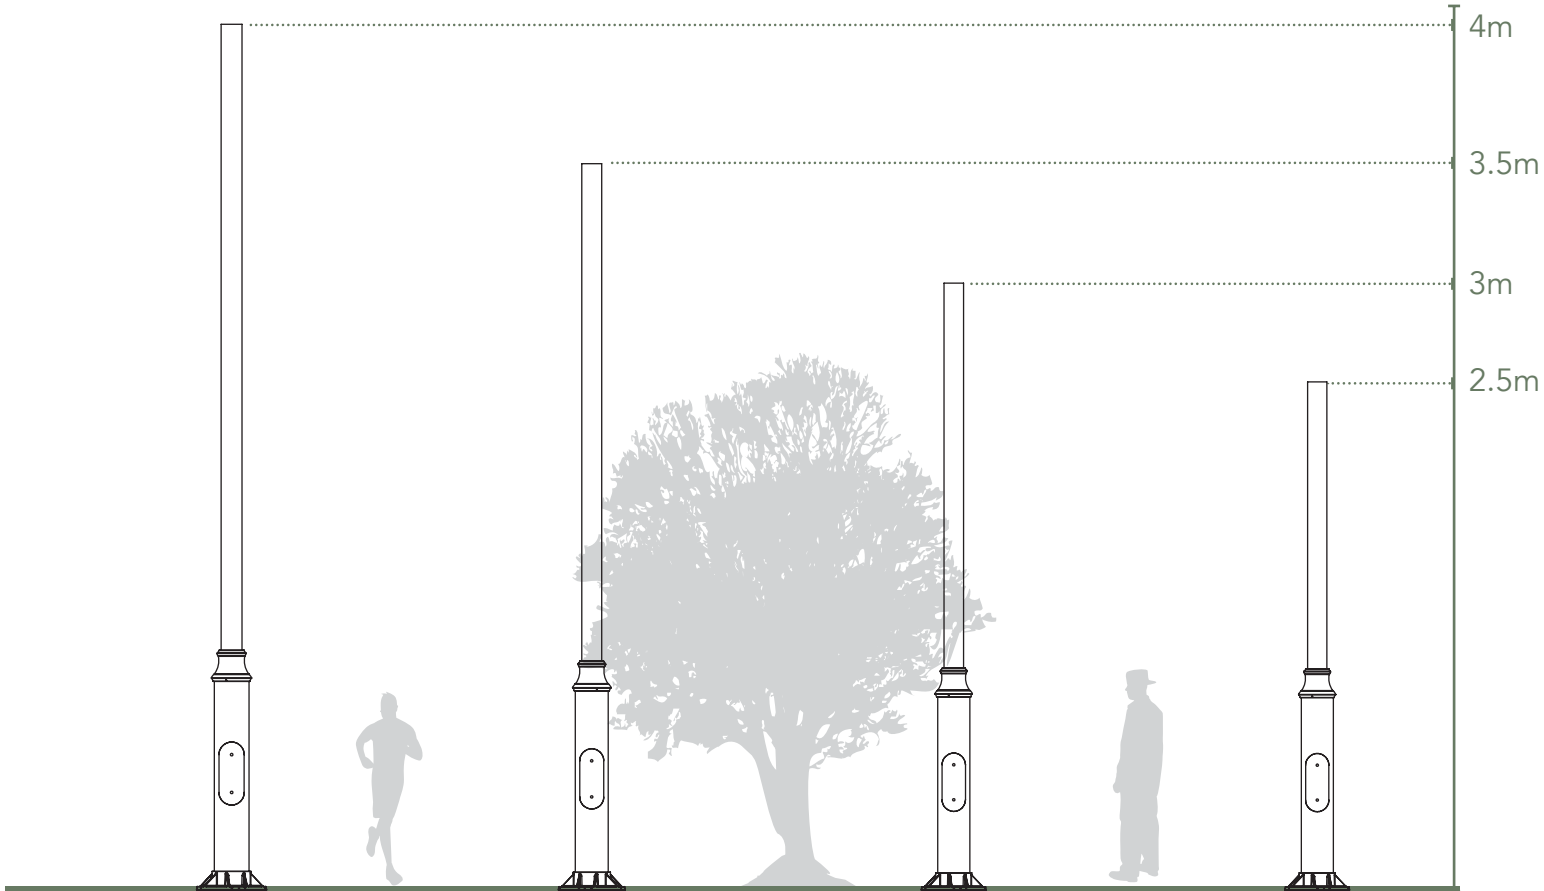


ITEM#	Height (m)	Bottom Dia (mm)	Top Dia (mm)	Tenon (mm)	Wall Thickness (mm)	Door Position (mm)	Door Size (mm)	Base Plate Size (mm)	Bolt Size (mm)	Bolt Circle (mm)	Embedding (mm)
GBP5530A-H-BS	2.5≤H≤4.0	140	76	60/76	3.0	300	250X95	230X230X55	4XM18	135	800
GBP6035A-H-BS		152	89		3.0		250X95	240X240X75	4XM20	145	
GBP6545B-H-BS		165	114		3.5		300X120	270X270X90	4XM20	180	

Catalog Number designates

Shaft Diameter At Base	Shaft Diameter At Top	Wall Thickness	Pole Hight	Surface Finish	Accessory
55=5.5"(140mm)	30=3.0"(76mm)	A=3.0mm B=3.5mm	2.5≤H≤4.0	SB=Satin Brushed AD=Anodized PC=Powder Coating	See Accessories Section
60=6.0"(152mm)	35=3.5"(89mm)				
65=6.5"(165mm)	45=4.5"(114mm)				

WATERFORD .

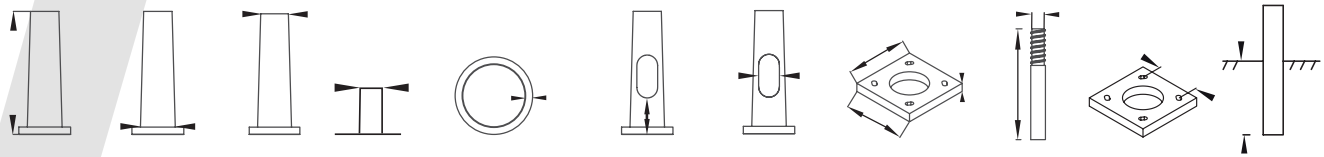
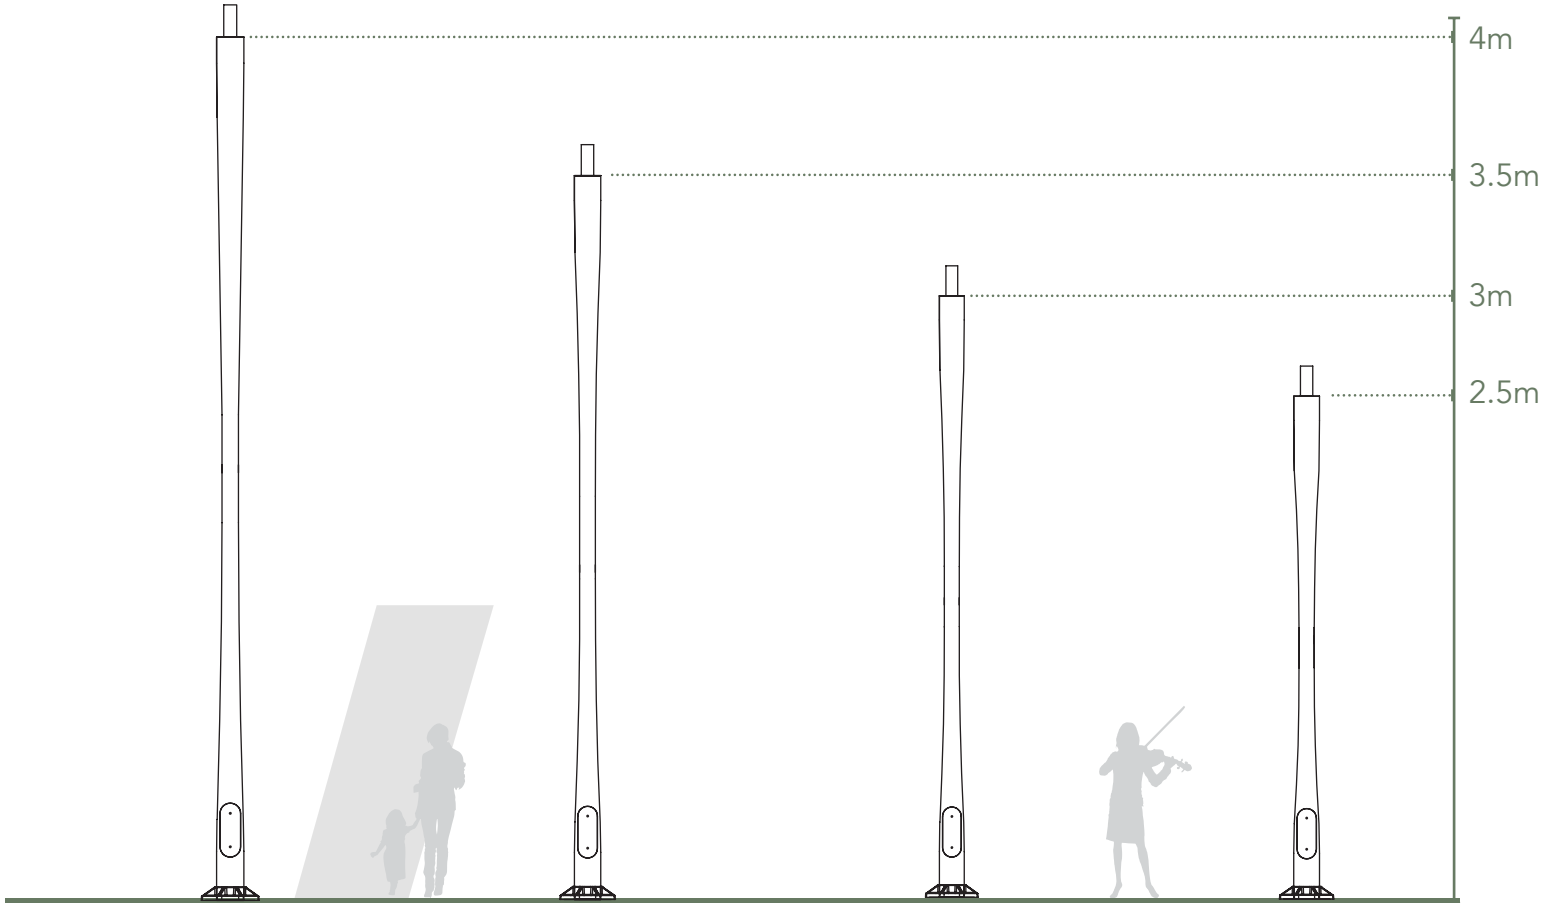


ITEM#	Height (m)	Bottom Dia (mm)	Top Dia (mm)	Tenon (mm)	Wall Thickness (mm)	Door Position (mm)	Door Size (mm)	Base Plate Size (mm)	Bolt Size (mm)	Bolt Circle (mm)	Embedding (mm)
GCP5050A-H-BS	2.5≤H≤4.0	127	127	60/76	3.0	300	250X95	230X230X55	4XM18	135	800
GCP5555A-H-BS		140	140					240X240X75	4XM18	145	
GCP6060A-H-BS		152	152					260X260X90	4XM20	170	

Catalog Number designates

Shaft Diameter At Base	Shaft Diameter At Top	Wall Thickness	Pole Hight	Surface Finish	Accessory
50=5.0"(127mm)	50=5.0"(127mm)	A=3.0mm	2.5≤H≤4.0	SB=Satin Brushed AD=Anodized PC=Powder Coating	See Accessories Section
55=5.5"(140mm)	55=5.5"(140mm)				
60=6.0"(152mm)	60=6.0"(152mm)				

AURORA .

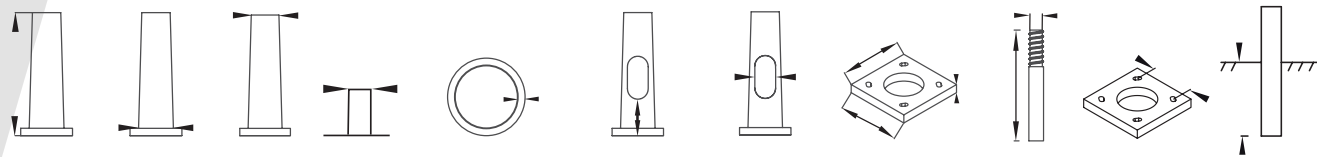
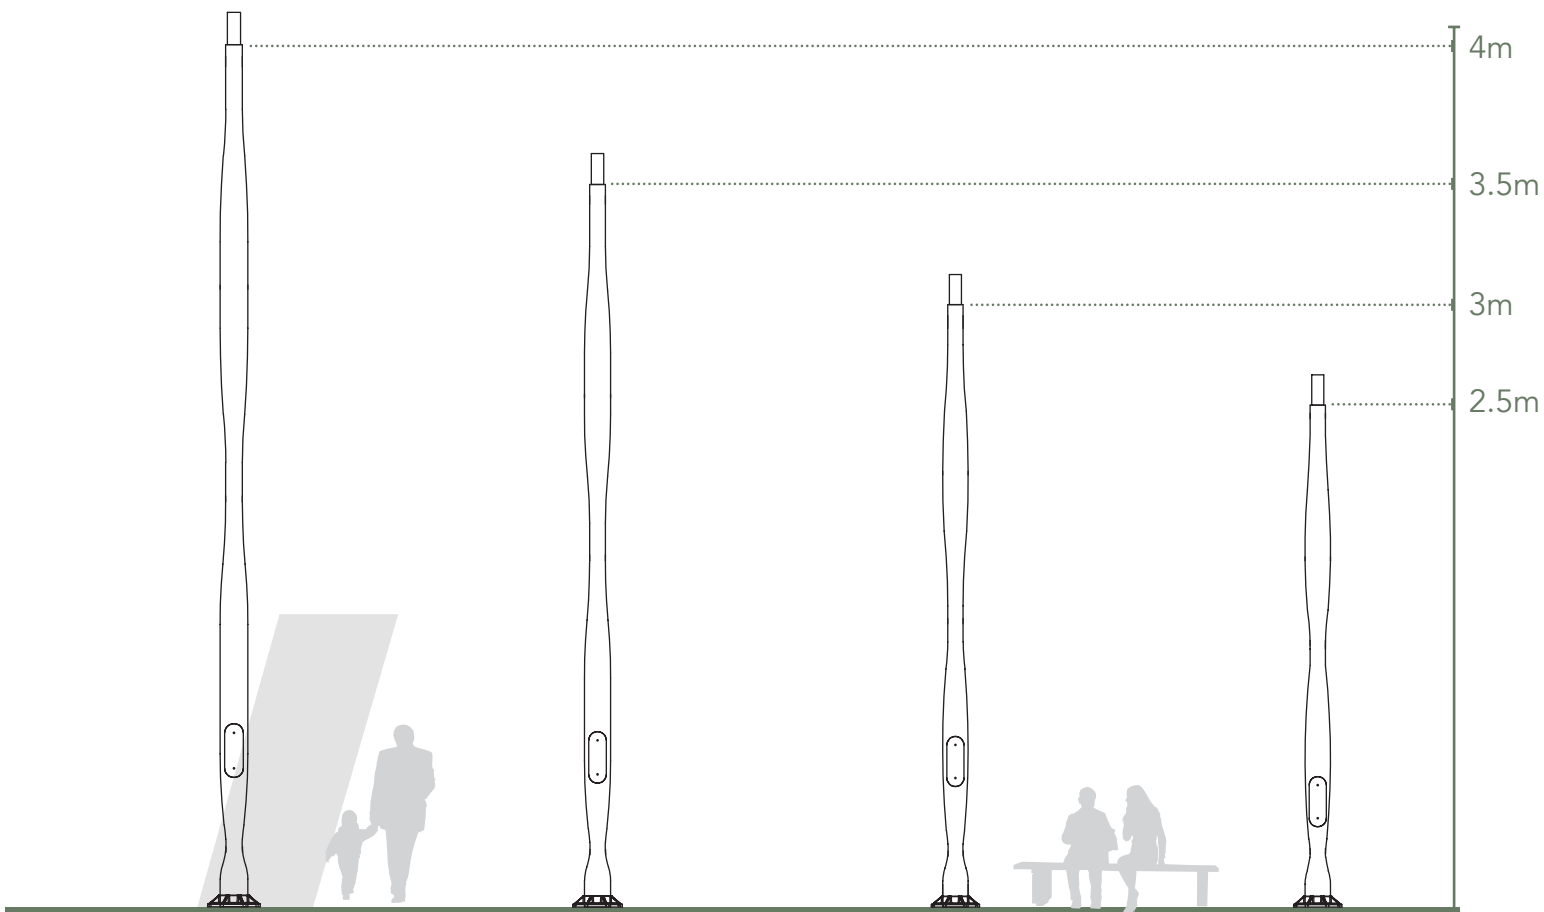


ITEM#	Height (m)	Bottom Dia (mm)	Top Dia (mm)	Tenon (mm)	Wall Thickness (mm)	Door Position (mm)	Door Size (mm)	Base Plate Size (mm)	Bolt Size (mm)	Bolt Circle (mm)	Embedding (mm)
GDP5030A-H-BS	2.5≤H≤4.0	127	76	60/76	3.0	500	250X95	230X230X55	4XM18	135	800
GDP5530A-H-BS		140	76					240X240X75	4XM18	145	
GDP6035A-H-BS		152	89					260X260X90	4XM20	170	

Catalog Number designates

Shaft Diameter At Base	Shaft Diameter At Top	Wall Thickness	Pole Hight	Surface Finish	Accessory
50=5.0"(127mm)	30=3.0"(76mm)	A=3.0mm	2.5≤H≤4.0	SB=Satin Brushed AD=Anodized PC=Powder Coating	See Accessories Section
55=5.5"(140mm)	30=3.0"(76mm)				
60=6.0"(152mm)	35=3.5"(89mm)				

CARLOW .

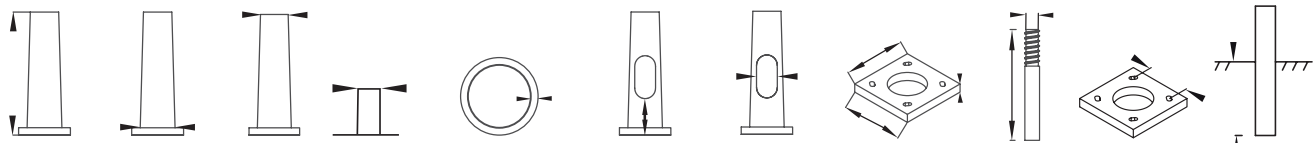
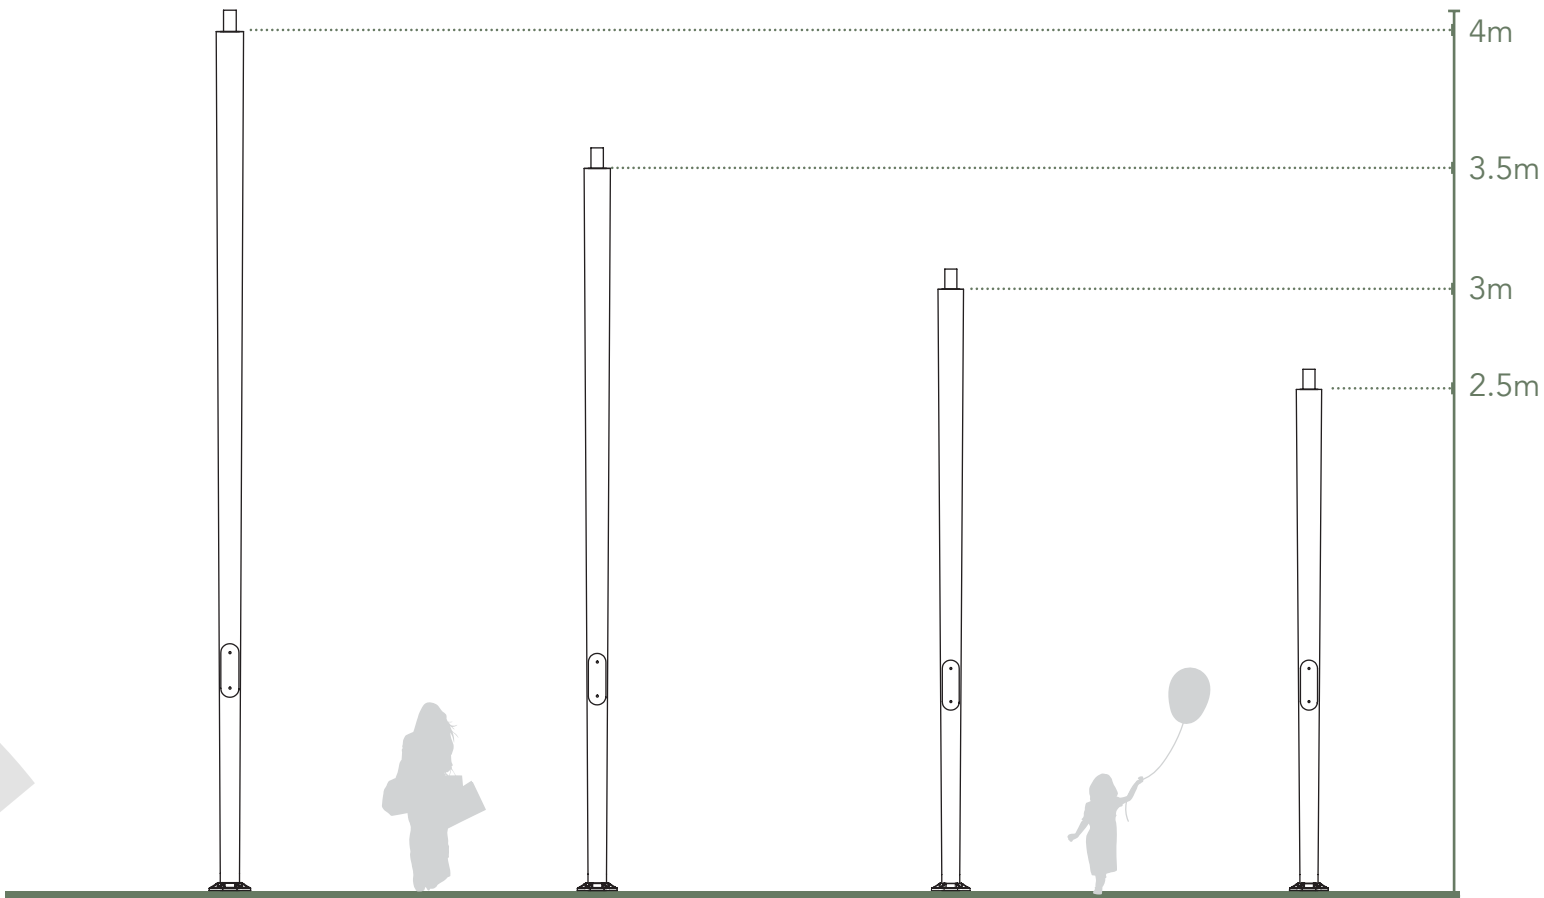


ITEM#	Height (m)	Bottom Dia (mm)	Top Dia (mm)	Tenon (mm)	Wall Thickness (mm)	Door Position (mm)	Door Size (mm)	Base Plate Size (mm)	Bolt Size (mm)	Bolt Circle (mm)	Embedding (mm)
GEP3050A-H-BS	2.5≤H≤4.0	76	127	60/76	3.0	900	250X85	250X250X16	4XM18	200	800
GEP3555A-H-BS		89	140						4XM18		
GEP4060A-H-BS		100	152						4XM18		

Catalog Number designates

Shaft Diameter At Base	Shaft Diameter At Top	Wall Thickness	Pole Hight	Surface Finish	Accessory
30=3.0"(76mm)	50=5.0"(127mm)	A=3.0mm	2.5≤H≤4.0	SB=Satin Brushed AD=Anodized PC=PowderCoating	See Accessories Section
35=3.5"(89mm)	55=5.5"(140mm)				
40=4.0"(100mm)	60=6.0"(152mm)				

CORK .

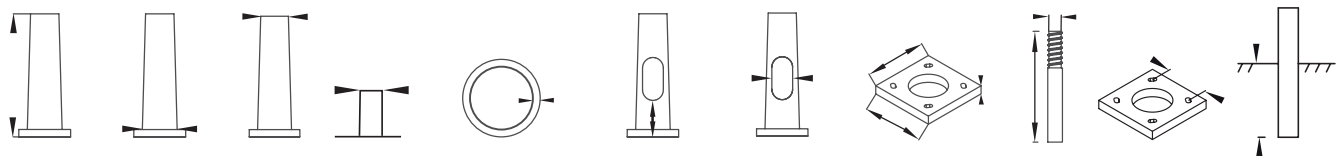
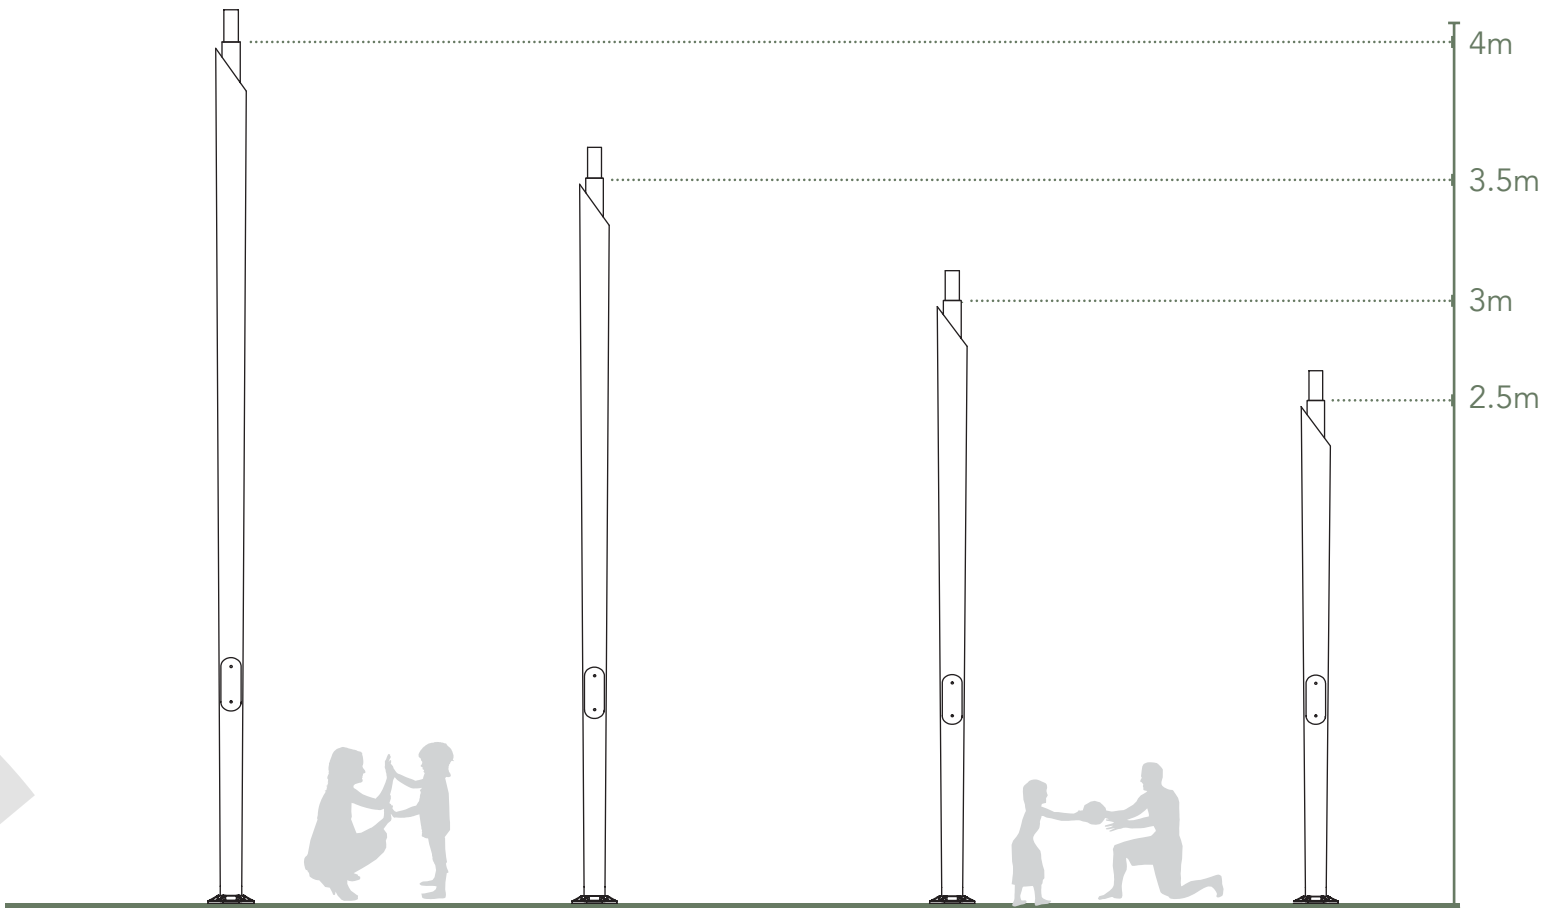


ITEM#	Height (m)	Bottom Dia (mm)	Top Dia (mm)	Tenon (mm)	Wall Thickness (mm)	Door Position (mm)	Door Size (mm)	Base Plate Size (mm)	Bolt Size (mm)	Bolt Circle (mm)	Embedding (mm)
GFP3050A-H-BS	2.5≤H≤4.0	76	127	60/76	3.0	900	250X85	250X250X16	4XM18	200	800
GFP3555A-H-BS		89	140						4XM18		
GFP4060A-H-BS		100	152						4XM18		

Catalog Number designates

Shaft Diameter At Base	Shaft Diameter At Top	Wall Thickness	Pole Hight	Surface Finish	Accessory
30=3.0"(76mm)	50=5.0"(127mm)	A=3.0mm	2.5≤H≤4.0	SB=Satin Brushed AD=Anodized PC=Powder Coating	See Accessories Section
35=3.5"(89mm)	55=5.5"(140mm)				
40=4.0"(100mm)	60=6.0"(152mm)				

MAYO .

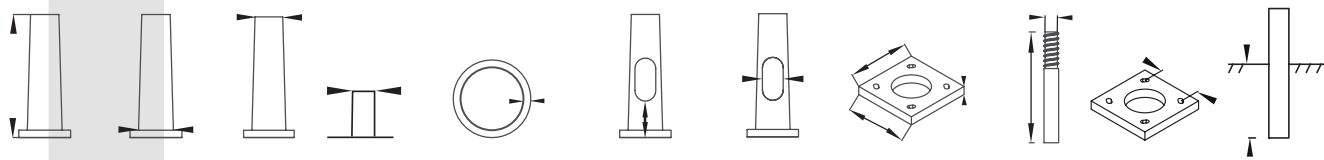
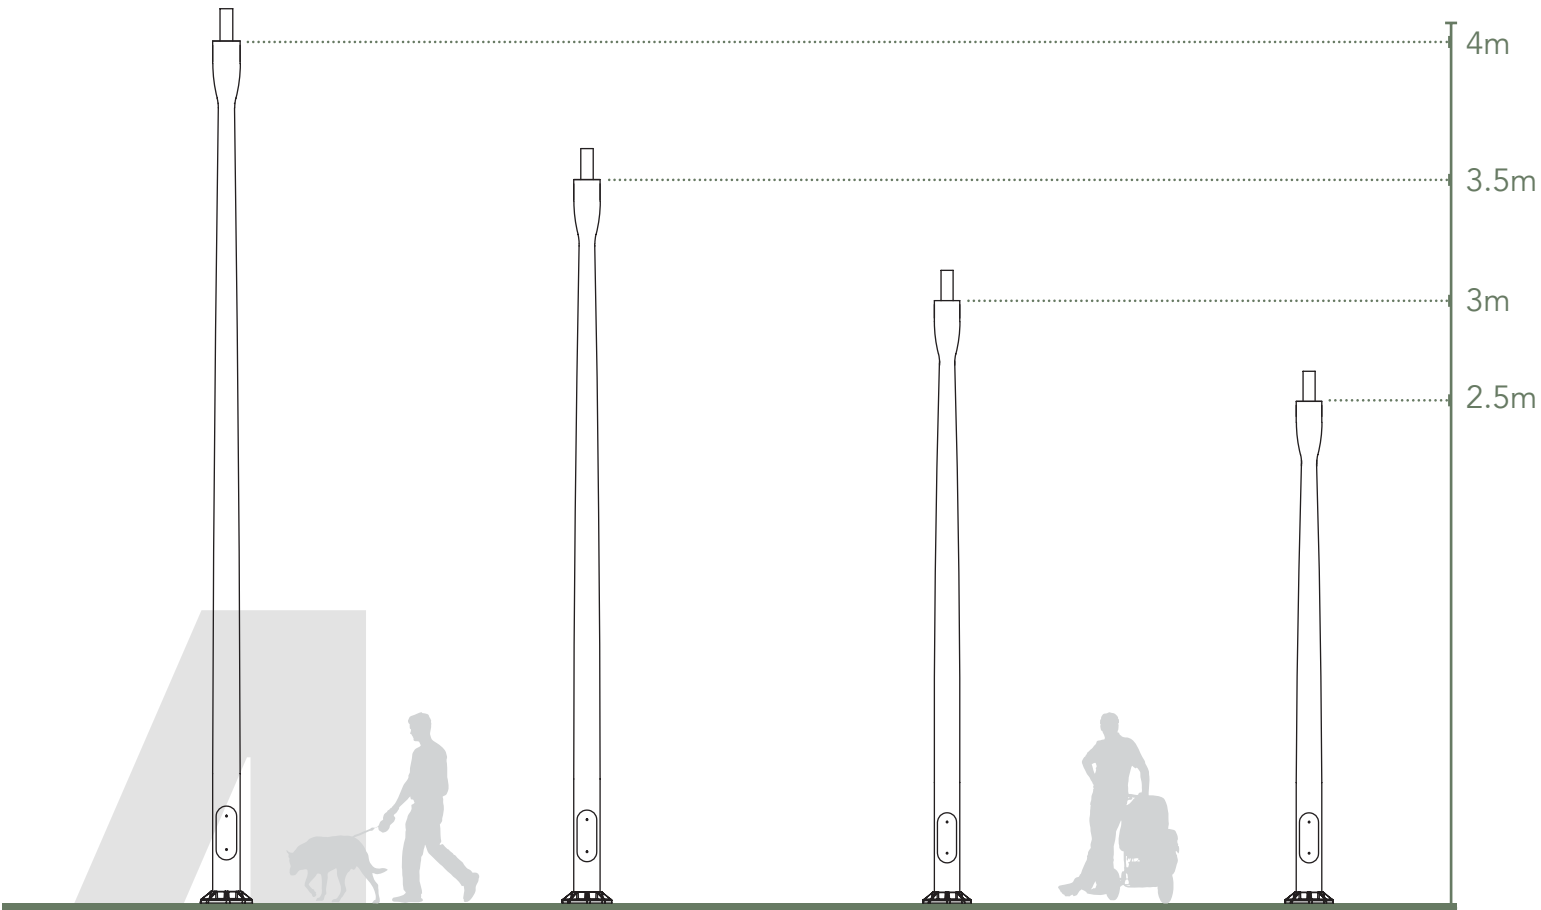


ITEM#	Height (m)	Bottom Dia (mm)	Top Dia (mm)	Tenon (mm)	Wall Thickness (mm)	Door Position (mm)	Door Size (mm)	Base Plate Size (mm)	Bolt Size (mm)	Bolt Circle (mm)	Embedding (mm)
GGP5050A-H-BS	2.5≤H≤4.0	127	127	60/76	3.0	300	250X95	230X230X55	4XM18	135	800
GGP5555A-H-BS		140	140					240X240X75	4XM18	145	
GGP6060A-H-BS		152	152					260X260X90	4XM20	170	

Catalog Number designates

Shaft Diameter At Base	Shaft Diameter At Top	Wall Thickness	Pole Hight	Surface Finish	Accessory
50=5.0"(127mm)	50=5.0"(127mm)	A=3.0mm	2.5≤H≤4.0	SB=Satin Brushed AD=Anodized PC=Powder Coating	See Accessories Section
55=5.5"(140mm)	55=5.5"(140mm)				
60=6.0"(152mm)	60=6.0"(152mm)				

DUBLIN .

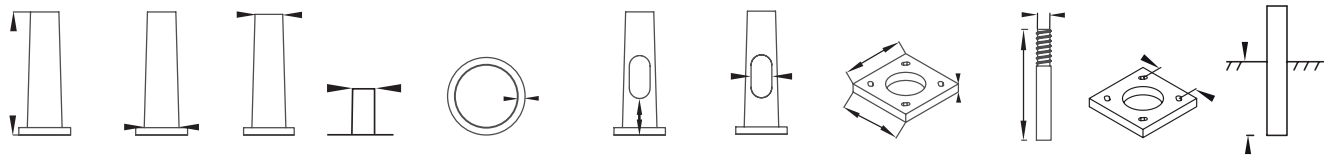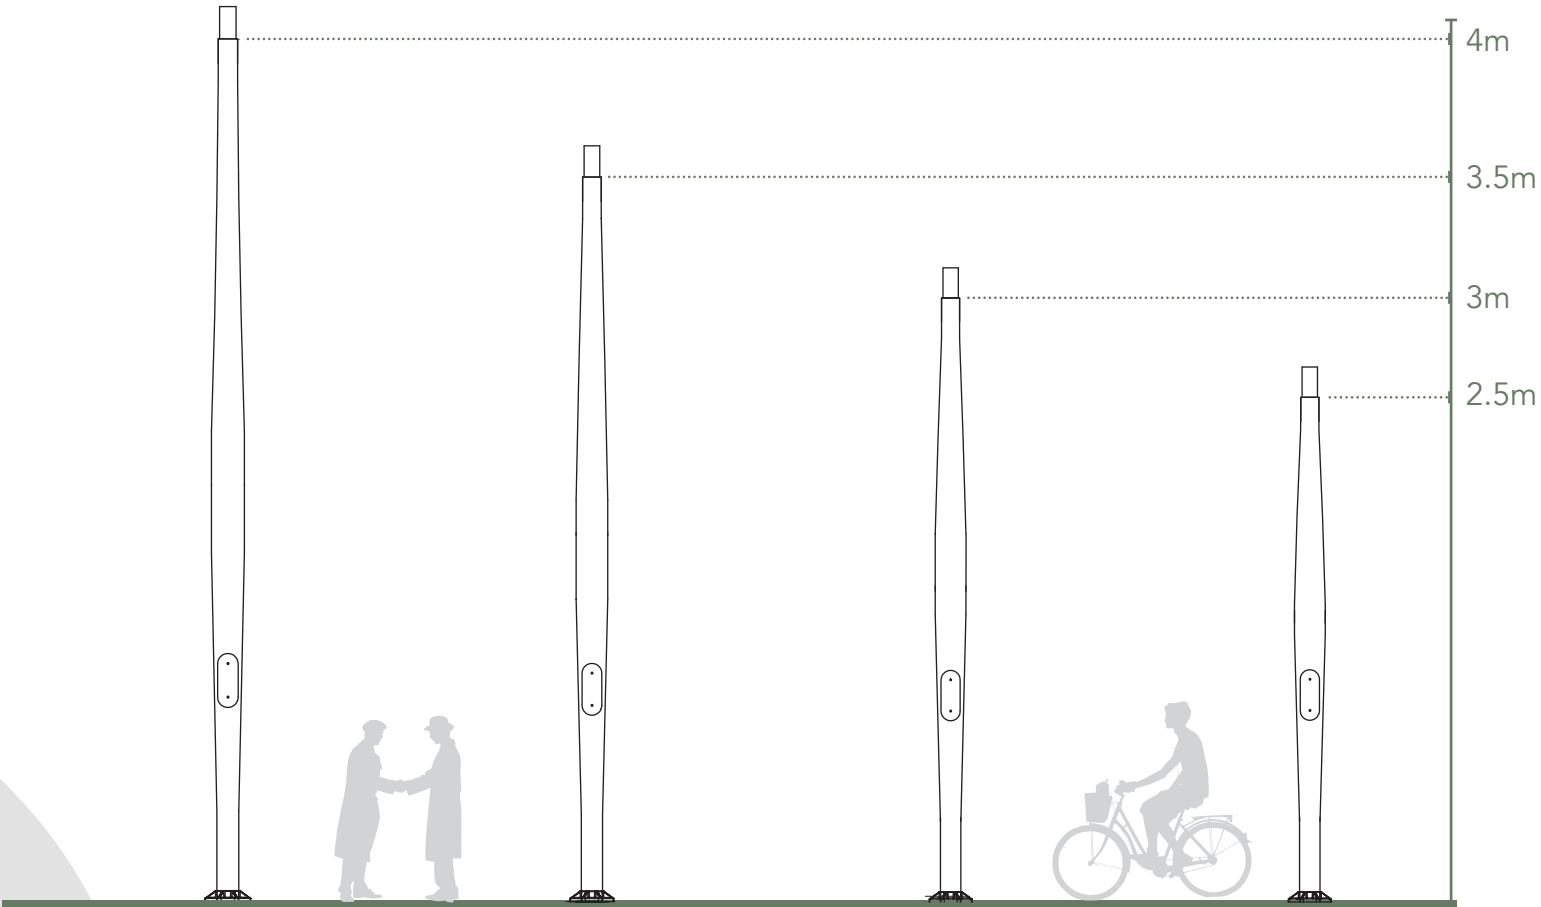


ITEM#	Height (m)	Bottom Dia (mm)	Top Dia (mm)	Tenon (mm)	Wall Thickness (mm)	Door Position (mm)	Door Size (mm)	Base Plate Size (mm)	Bolt Size (mm)	Bolt Circle (mm)	Embedding (mm)
GHP3530A-H-BS	2.5≤H≤4.0	89	76	60/76	3.0	900	250X85	250X250X16	4XM18	200	800
GHP4030A-H-BS		100	76						4XM18		
GHP4035A-H-BS		100	89						4XM18		

Catalog Number designates

Shaft Diameter At Base	Shaft Diameter At Top	Wall Thickness	Pole Hight	Surface Finish	Accessory
35=3.5"(89mm)	30=3.0"(76mm)	A=3.0mm	2.5≤H≤4.0	SB=Satin Brushed AD=Anodized PC=Powder Coating	See Accessories Section
40=4.0"(100mm)	30=3.0"(76mm)				
40=4.0"(100mm)	35=3.5"(89mm)				

WEXFORD .

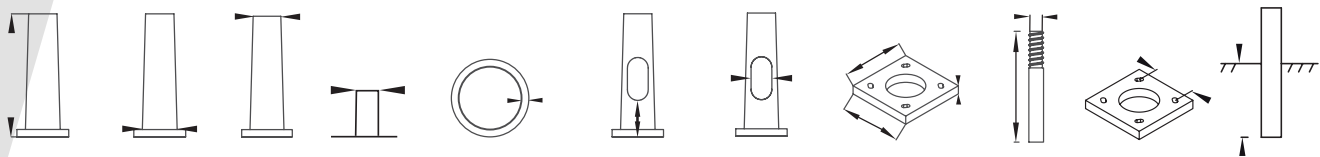


ITEM#	Height (m)	Bottom Dia (mm)	Top Dia (mm)	Tenon (mm)	Wall Thickness (mm)	Door Position (mm)	Door Size (mm)	Base Plate Size (mm)	Bolt Size (mm)	Bolt Circle (mm)	Embedding (mm)
GIP4030A-H-BS	2.5≤H≤4.0	100	76	60/76	3.0	300	250X95	215X215X50	4XM18	120	800
GIP4530A-H-BS		114	76					220X220X50		125	
GIP5035A-H-BS		127	89					230X230X55		135	

Catalog Number designates

Shaft Diameter At Base	Shaft Diameter At Top	Wall Thickness	Pole Hight	Surface Finish	Accessory
40=4.0"(100mm)	30=3.0"(76mm)	A=3.0mm	2.5≤H≤4.0	SB=Satin Brushed AD=Anodized PC=Powder Coating	See Accessories Section
45=4.5"(114mm)	30=3.0"(76mm)				
50=5.0"(127mm)	35=3.5"(89mm)				

SLIGO .


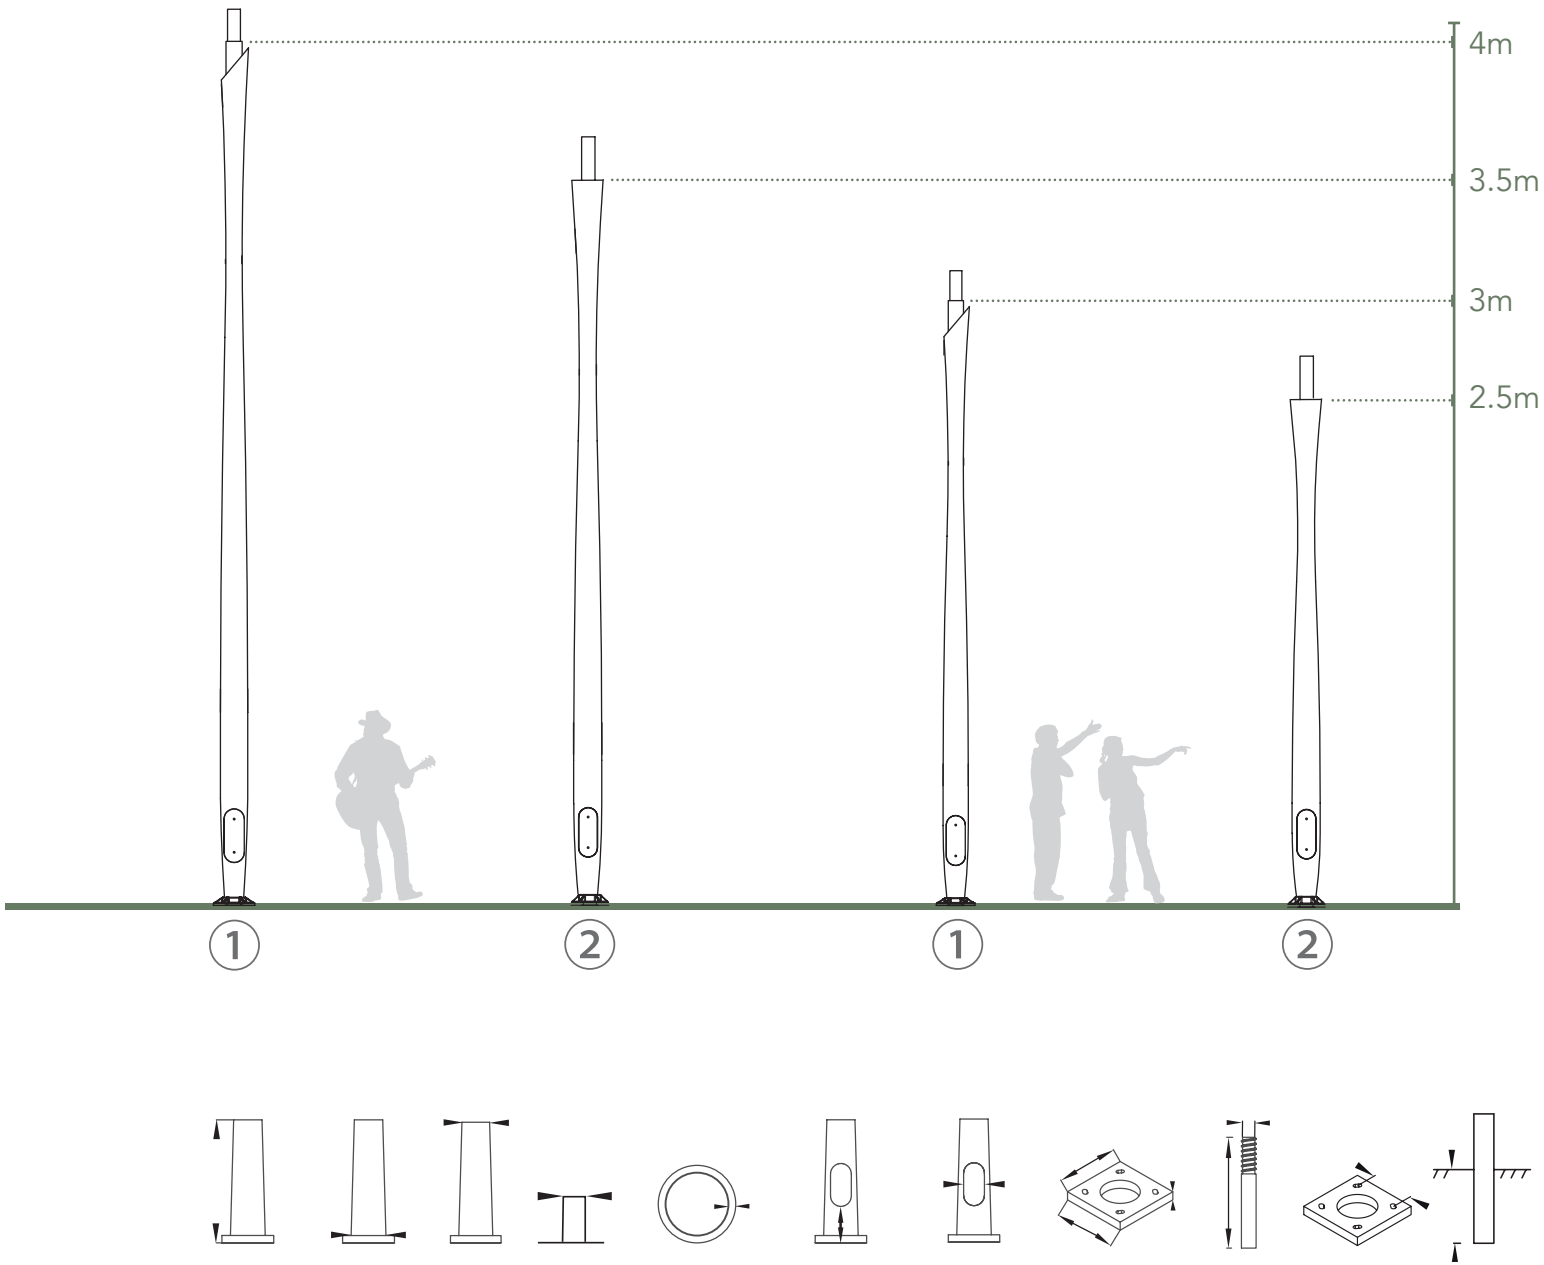


ITEM#	Height (m)	Bottom Dia (mm)	Top Dia (mm)	Tenon (mm)	Wall Thickness (mm)	Door Position (mm)	Door Size (mm)	Base Plate Size (mm)	Bolt Size (mm)	Bolt Circle (mm)	Embedding (mm)
GJP4050A-H-BS	2.5≤H≤4.0	100	127	60/76	3.0	300	250X95	215X215X50	4XM18	120	800
GJP4555A-H-BS		114	140					220X220X50		125	
GJP5060A-H-BS		127	152					230X230X55		135	

Catalog Number designates

Shaft Diameter At Base	Shaft Diameter At Top	Wall Thickness	Pole Hight	Surface Finish	Accessory
40=4.0"(100mm)	50=5.0"(127mm)	A=3.0mm	2.5≤H≤4.0	SB=Satin Brushed AD=Anodized PC=Powder Coating	See Accessories Section
45=4.5"(114mm)	55=5.5"(140mm)				
50=5.0"(127mm)	60=6.0"(152mm)				

WICKLOW .

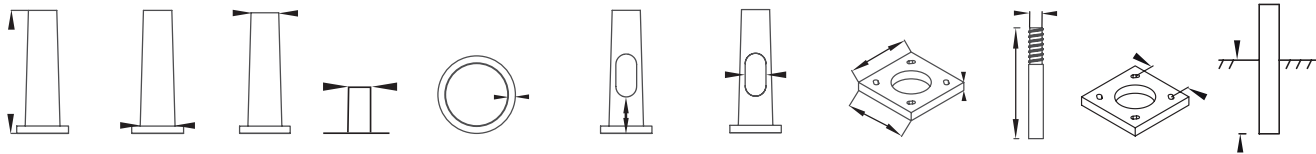
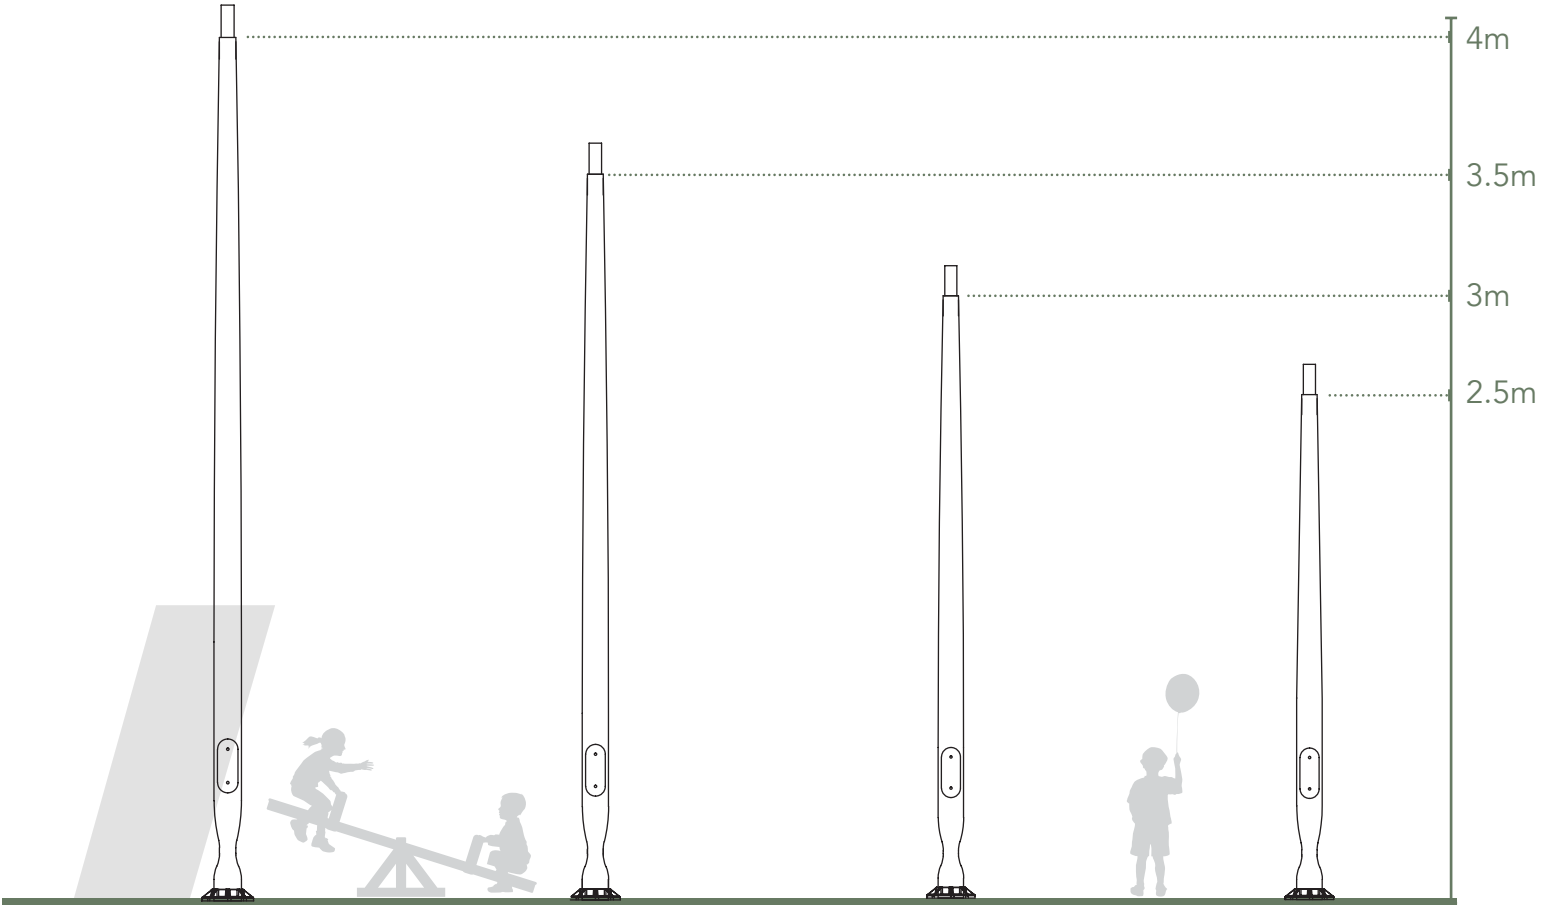


ITEM#	Height (m)	Bottom Dia (mm)	Top Dia (mm)	Tenon (mm)	Wall Thickness (mm)	Door Position (mm)	Door Size (mm)	Base Plate Size (mm)	Bolt Size (mm)	Bolt Circle (mm)	Embedding (mm)
GKP5030A-H-BS	2.5≤H≤4.0	127	76	60/76	3.0	500	250X95	230X230X55	4XM18	135	800
GKP5530A-H-BS		140	76					240X240X75	4XM18	145	
GKP6035A-H-BS		152	89					260X260X90	4XM20	170	

Catalog Number designates

Shaft Diameter At Base	Shaft Diameter At Top	Wall Thickness	Pole Hight	Surface Finish	Accessory
50=5.0"(127mm)	30=3.0"(76mm)	A=3.0mm	2.5≤H≤4.0	SB=Satin Brushed AD=Anodized PC=Powder Coating	See Accessories Section
55=5.5"(140mm)	30=3.0"(76mm)				
60=6.0"(152mm)	35=3.5"(89mm)				

CAVAN .

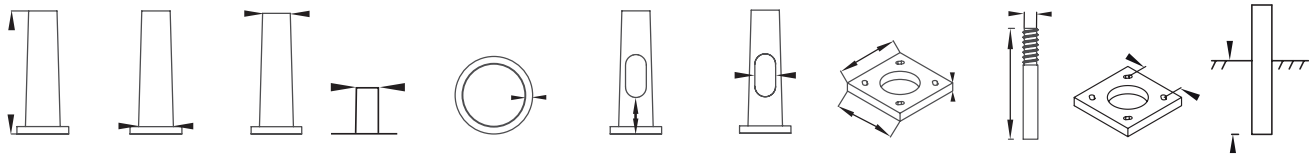
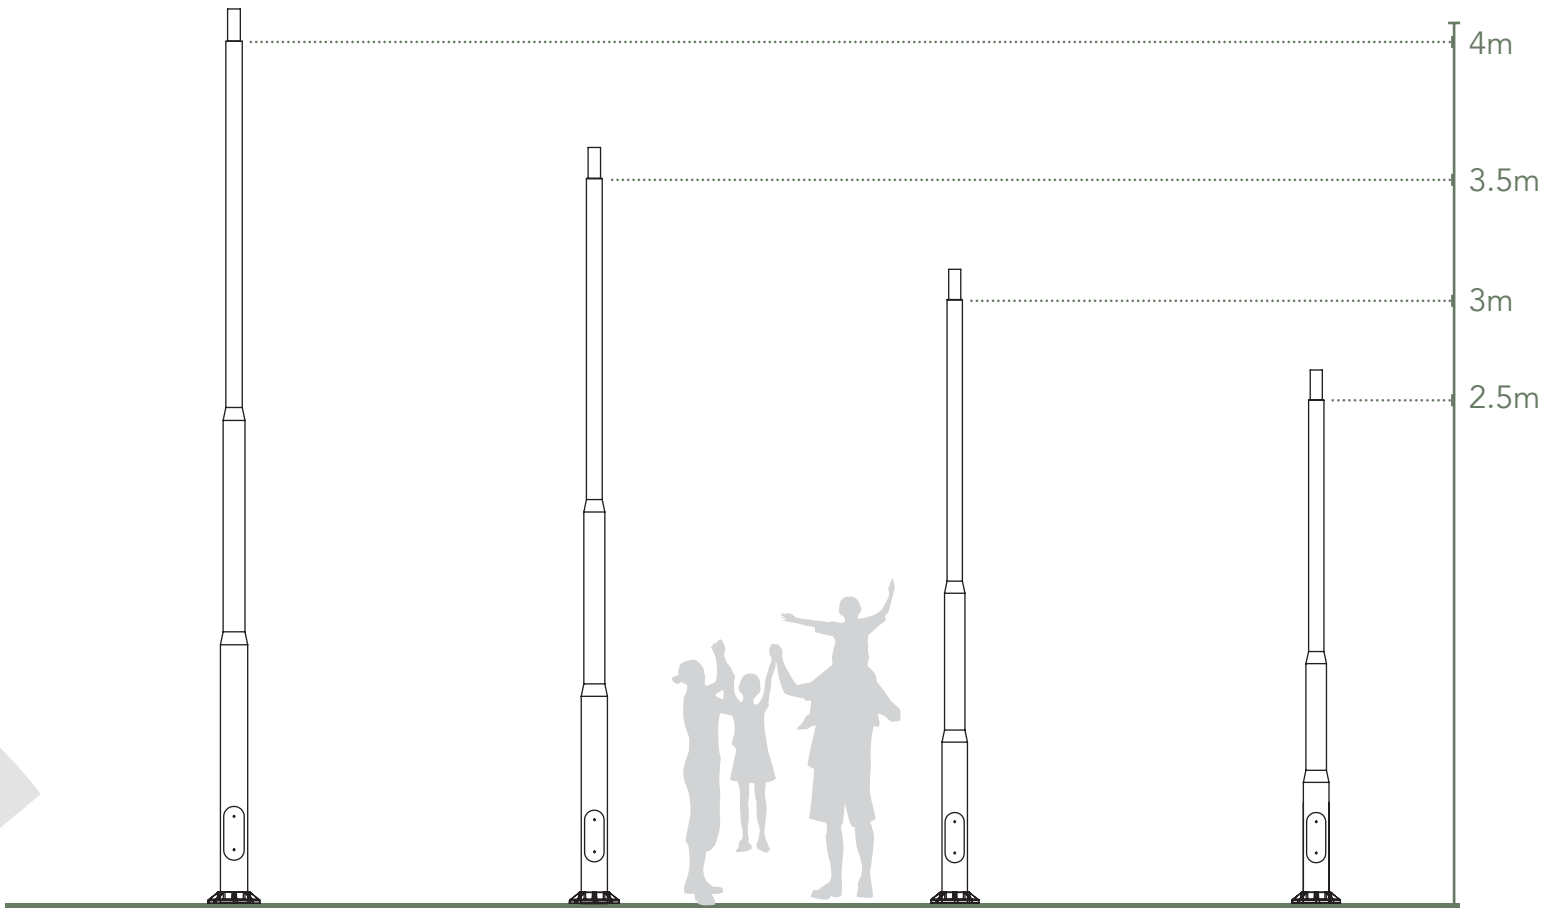


ITEM#	Height (m)	Bottom Dia (mm)	Top Dia (mm)	Tenon (mm)	Wall Thickness (mm)	Door Position (mm)	Door Size (mm)	Base Plate Size (mm)	Bolt Size (mm)	Bolt Circle (mm)	Embedding (mm)
GLP5030A-H-BS	2.5≤H≤4.0	127	76	60/76	3.0	300	250X95	230X230X55	4XM18	135	800
GLP5535A-H-BS		140	89					240X240X75	4XM18	145	
GLP6040A-H-BS		152	100					260X260X90	4XM20	170	

Catalog Number designates

Shaft Diameter At Base	Shaft Diameter At Top	Wall Thickness	Pole Hight	Surface Finish	Accessory
50=5.0"(127mm)	30=3.0"(76mm)	A=3.0mm	2.5≤H≤4.0	SB=Satin Brushed AD=Anodized PC=Powder Coating	See Accessories Section
55=5.5"(140mm)	35=3.5"(76mm)				
60=6.0"(152mm)	40=4.0"(89mm)				

PEGASUS .

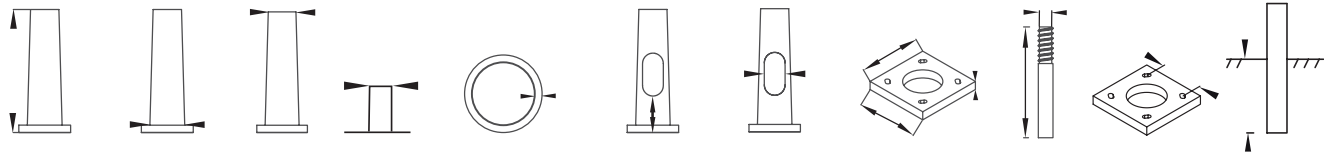
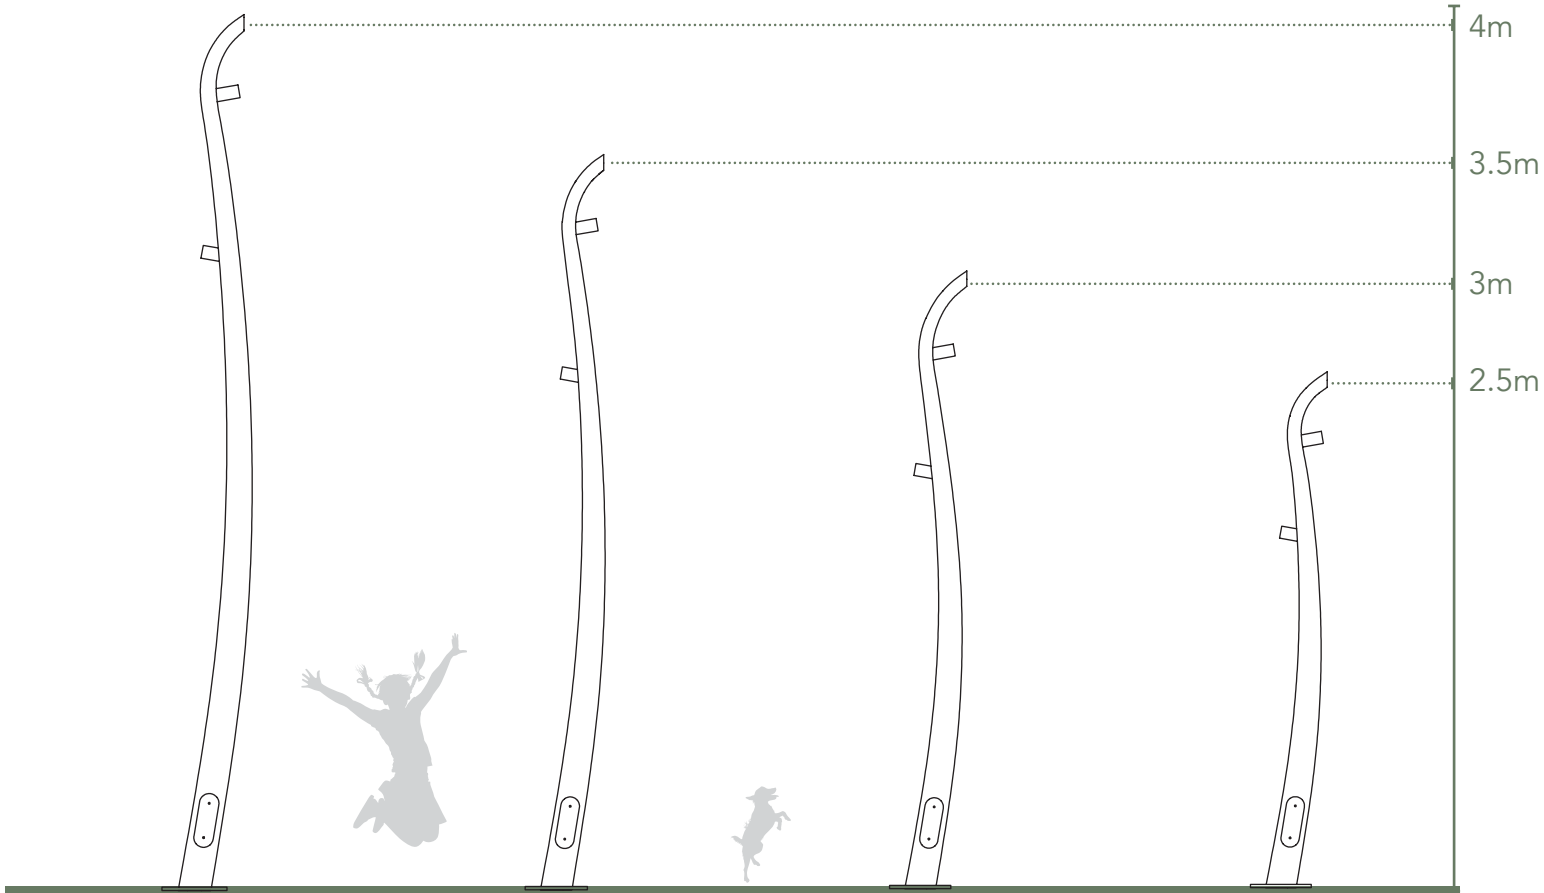


ITEM#	Height (m)	Bottom Dia (mm)	Top Dia (mm)	Tenon (mm)	Wall Thickness (mm)	Door Position (mm)	Door Size (mm)	Base Plate Size (mm)	Bolt Size (mm)	Bolt Circle (mm)	Embedding (mm)
GMP5030A-H-BS	2.5≤H≤4.0	127	76	60/76	3.0	300	250X95	230X230X55	4XM18	135	800
GMP5530A-H-BS		140	76					240X240X75	4XM18	145	
GMP6035A-H-BS		152	89					260X260X90	4XM20	170	

Catalog Number designates

Shaft Diameter At Base	Shaft Diameter At Top	Wall Thickness	Pole Hight	Surface Finish	Accessory
50=5.0"(127mm)	30=3.0"(76mm)	A=3.0mm	2.5≤H≤4.0	SB=Satin Brushed AD=Anodized PC=Powder Coating	See Accessories Section
55=5.5"(140mm)	30=3.0"(76mm)				
60=6.0"(152mm)	35=3.5"(89mm)				

POLARIS .


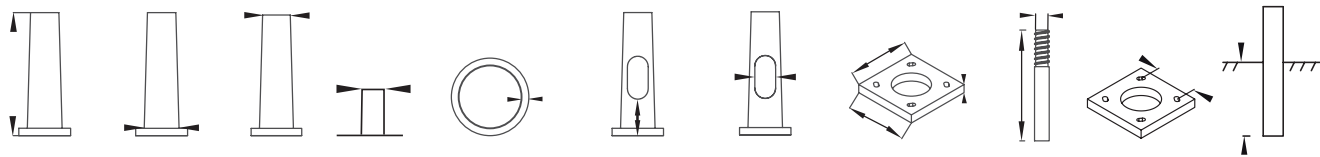
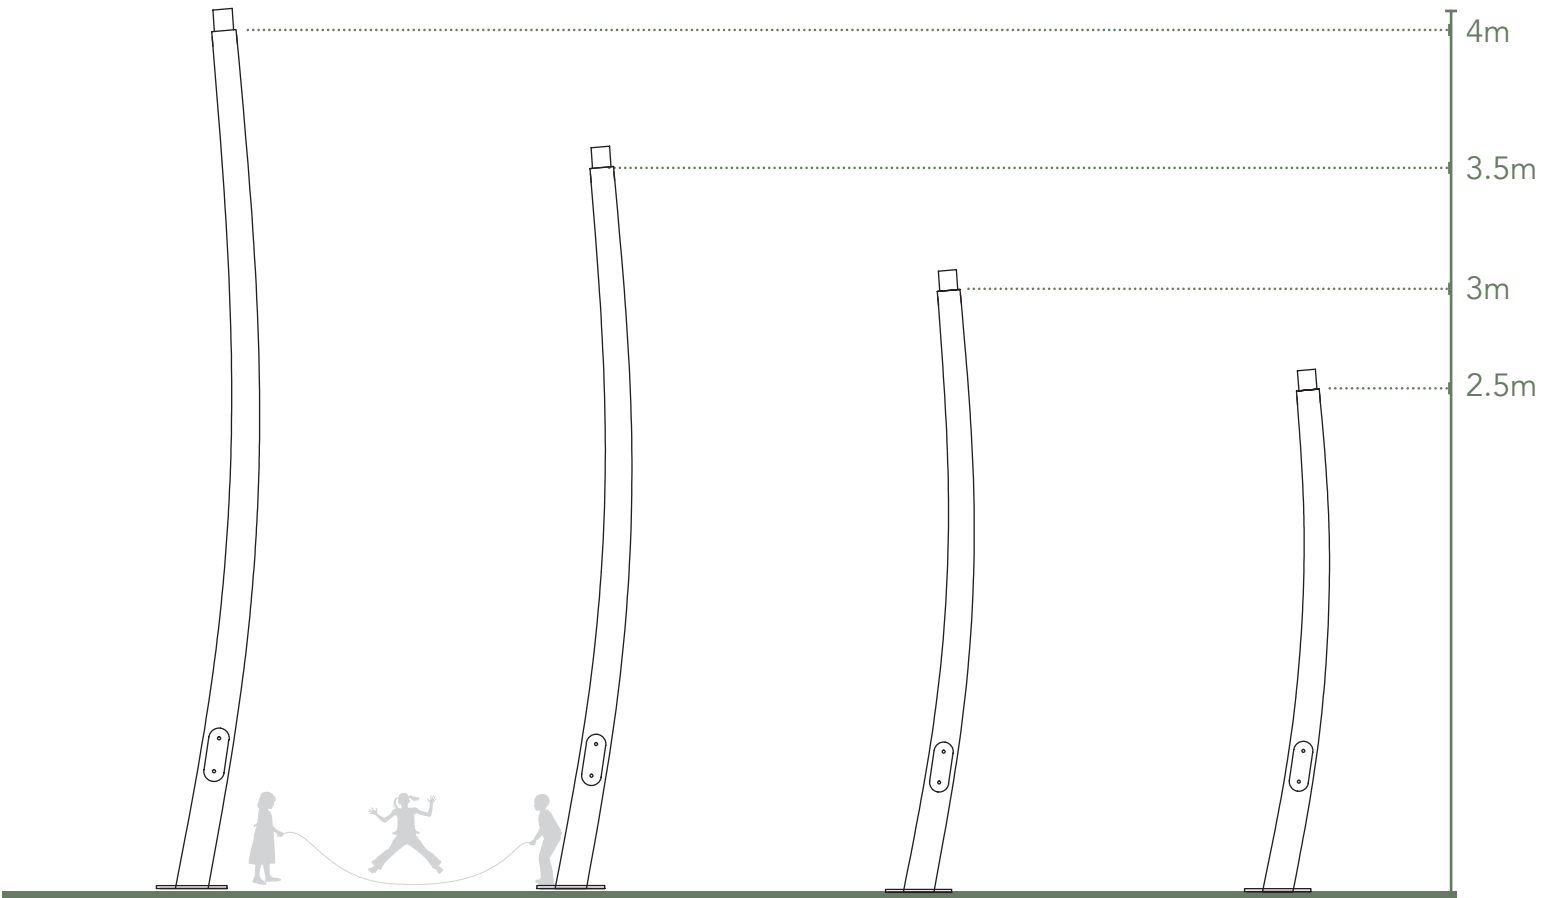


ITEM#	Height (m)	Bottom Dia (mm)	Top Dia (mm)	Tenon (mm)	Wall Thickness (mm)	Door Position (mm)	Door Size (mm)	Base Plate Size (mm)	Bolt Size (mm)	Bolt Circle (mm)	Embedding (mm)
GNP5045A-H-BS	2.5≤H≤4.0	127	114	89	3.0	300	250X95	230X230X55	4XM18	135	800
GNP5545A-H-BS		140						240X240X75	4XM18	145	
GNP6045A-H-BS		152						260X260X90	4XM20	170	

Catalog Number designates

Shaft Diameter At Base	Shaft Diameter At Top	Wall Thickness	Pole Hight	Surface Finish	Accessory
50=5.0"(127mm)	45=4.5"(114mm)	A=3.0mm	2.5≤H≤4.0	SB=Satin Brushed AD=Anodized PC=Powder Coating	See Accessories Section
55=5.5"(140mm)					
60=6.0"(152mm)					

ARIES .

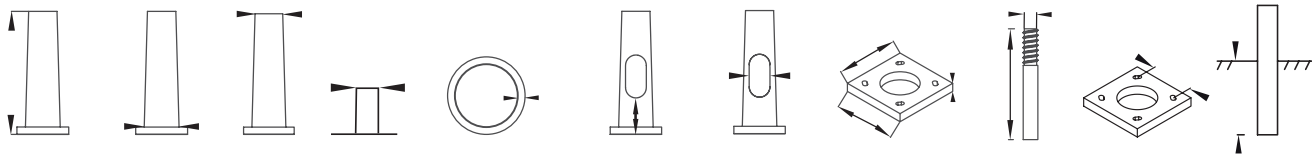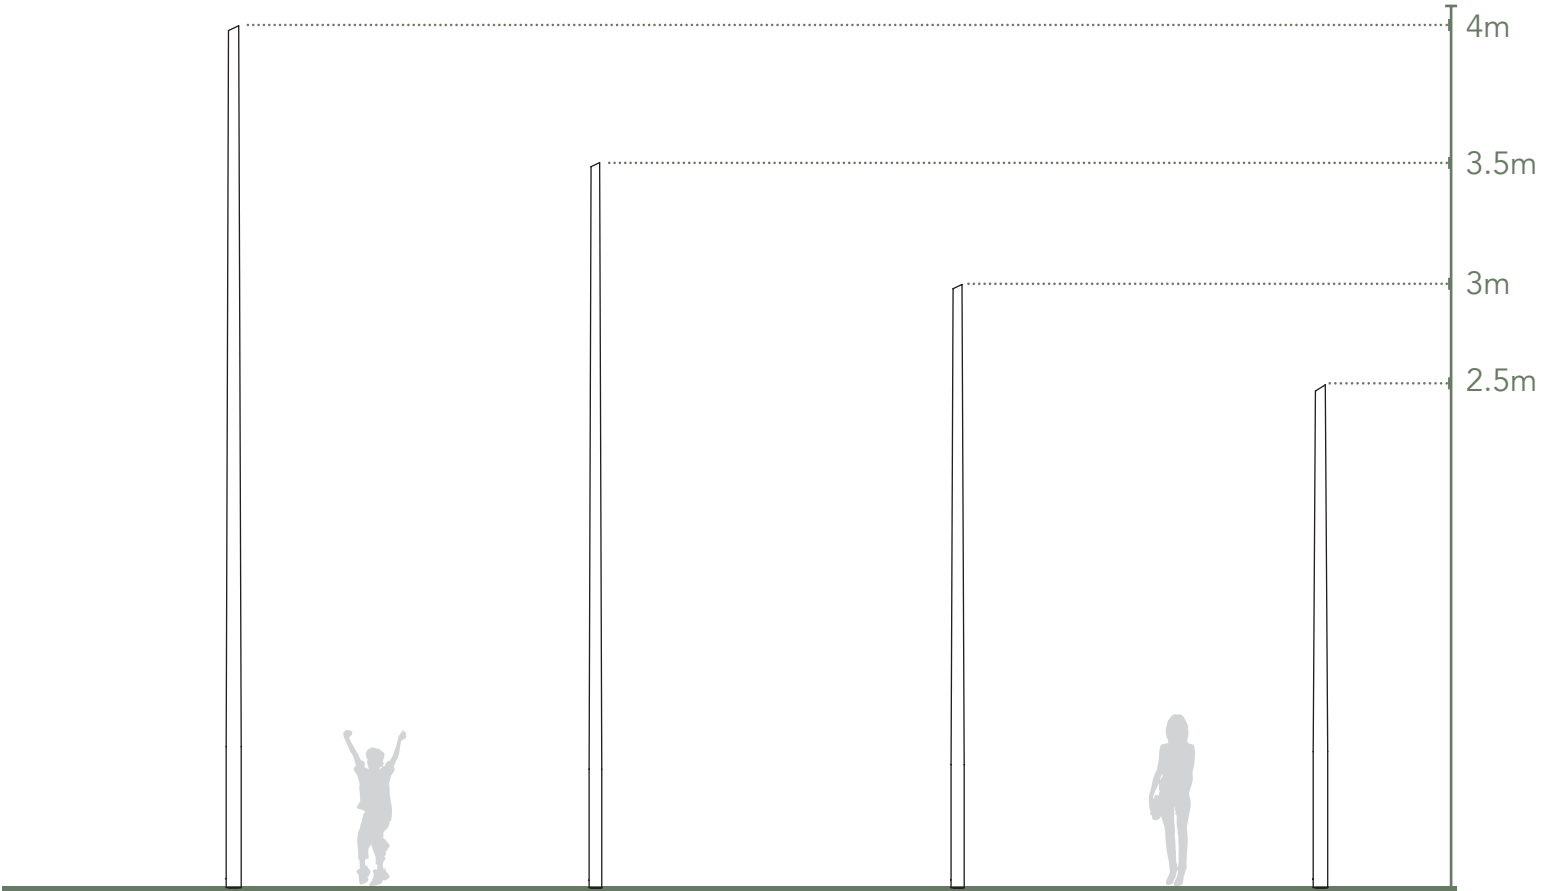
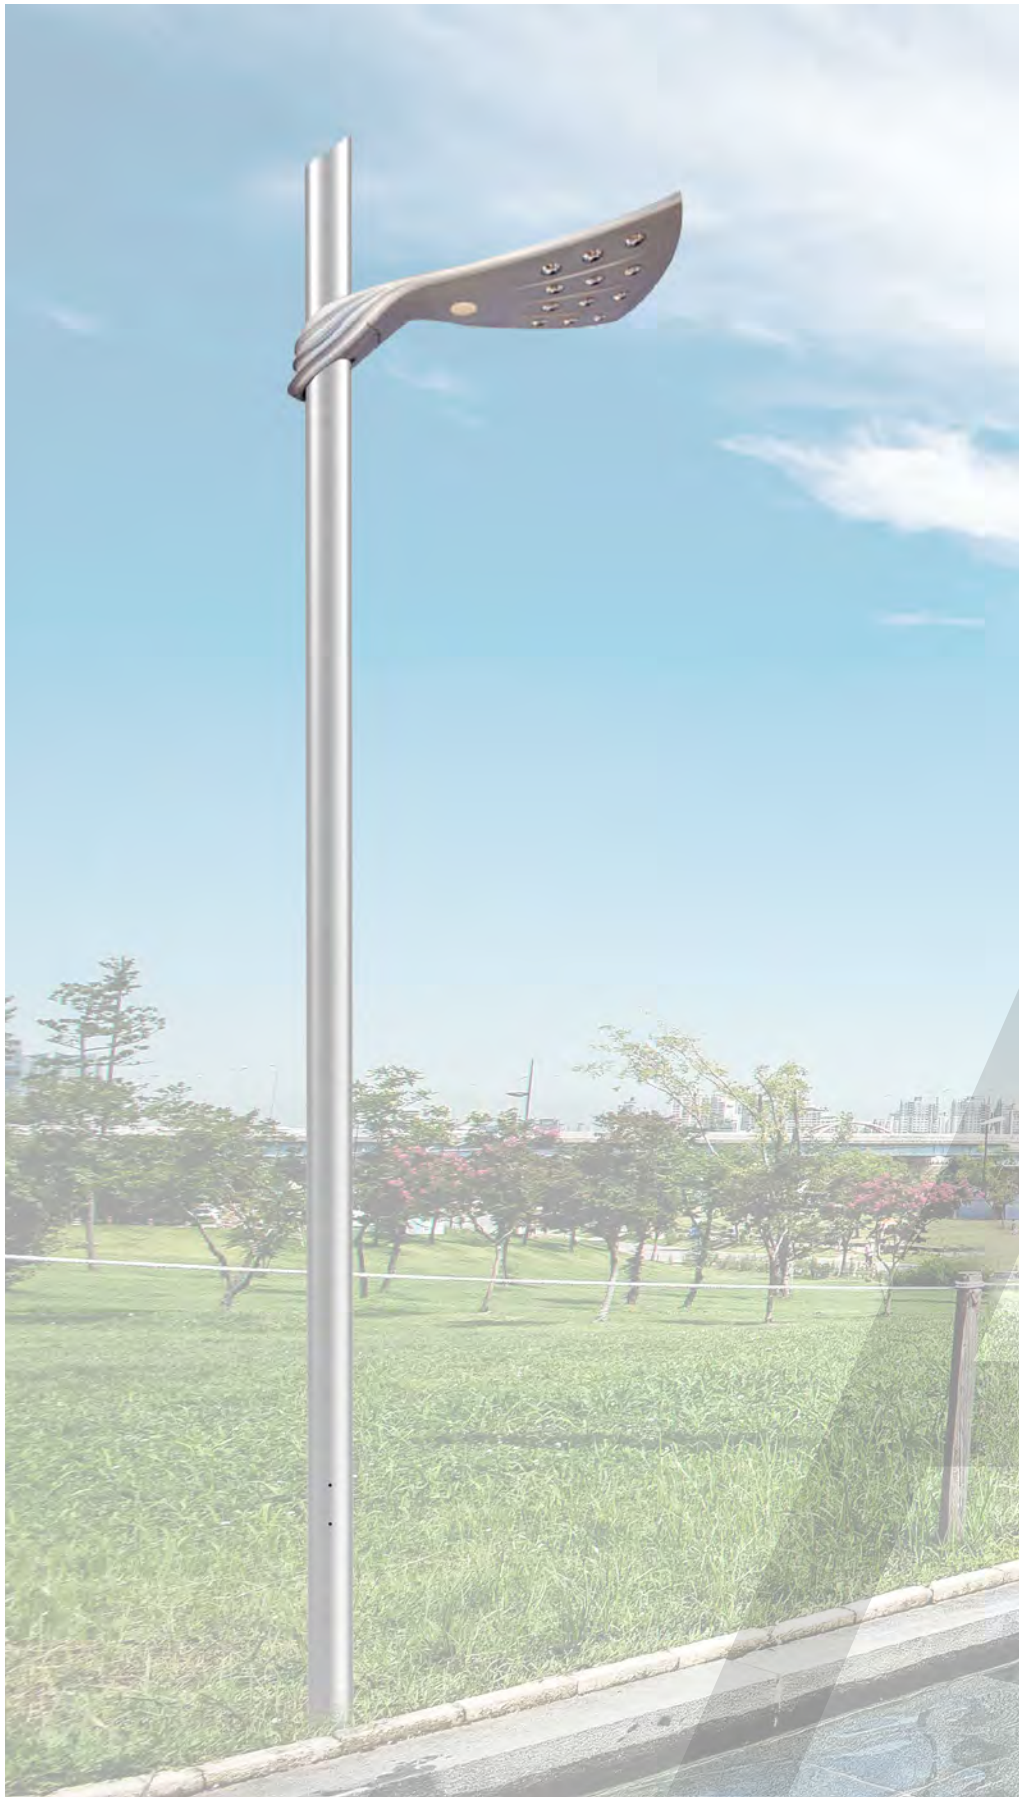


ITEM#	Height (m)	Bottom Dia (mm)	Top Dia (mm)	Tenon (mm)	Wall Thickness (mm)	Door Position (mm)	Door Size (mm)	Base Plate Size (mm)	Bolt Size (mm)	Bolt Circle (mm)	Embedding (mm)
GOP4545A-H-BS	2.5≤H≤4.0	114	114	/	3.0	300	250X95	220X220X50	4XM18	125	800
GOP5045A-H-BS		127						230X230X55	4XM18	135	
GOP5545A-H-BS		140						240X240X75	4XM18	145	
GOP6045A-H-BS		152						260X260X90	4XM20	170	

Catalog Number designates

Shaft Diameter At Base	Shaft Diameter At Top	Wall Thickness	Pole Hight	Surface Finish	Accessory
45=4.5"(114mm)	45=4.5"(114mm)	A=3.0mm	2.5≤H≤4.0	SB=Satin Brushed AD=Anodized PC=Powder Coating	See Accessories Section
50=5.0"(127mm)					
55=5.5"(140mm)					
60=6.0"(152mm)					

LIBRA .

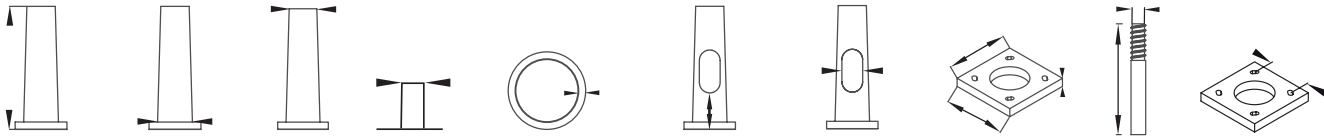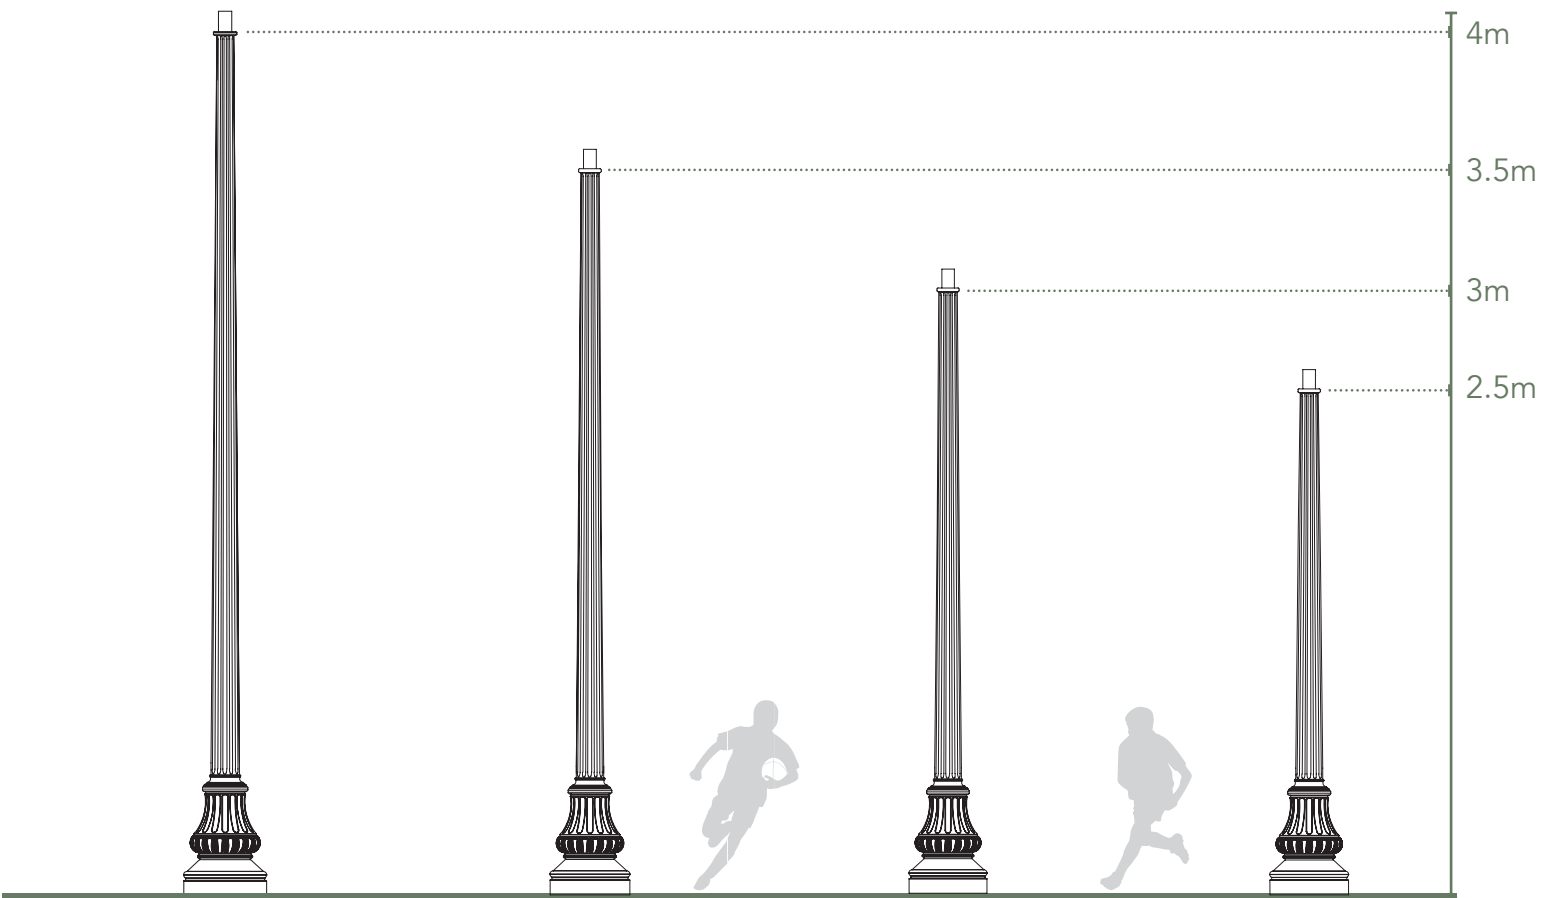

ITEM#	Height (m)	Bottom Dia (mm)	Top Dia (mm)	Tenon (mm)	Wall Thickness (mm)	Door Position (mm)	Door Size (mm)	Base Plate Size (mm)	Bolt Size (mm)	Bolt Circle (mm)
GPP5030A-H-BS	2.5≤H≤4.0	127	76	60	3.0	250	100X150	230X230X55	4XM18	135
GPP5530A-H-BS		140	76					240X240X75	4XM18	145
GPP6035A-H-BS		152	89					260X260X90	4XM20	170


Catalog Number designates

Shaft Diameter At Base	Shaft Diameter At Top	Wall Thickness	Pole Hight	Surface Finish	Accessory
50=5.0"(127mm)	30=3.0"(76mm)	A=3.0mm	2.5≤H≤4.0	SB=Satin Brushed AD=Anodized PC=Powder Coating	See Accessories Section
55=5.5"(140mm)	30=3.0"(76mm)				
60=6.0"(152mm)	35=3.5"(89mm)				

ROADWAY POLES .





MEDA .

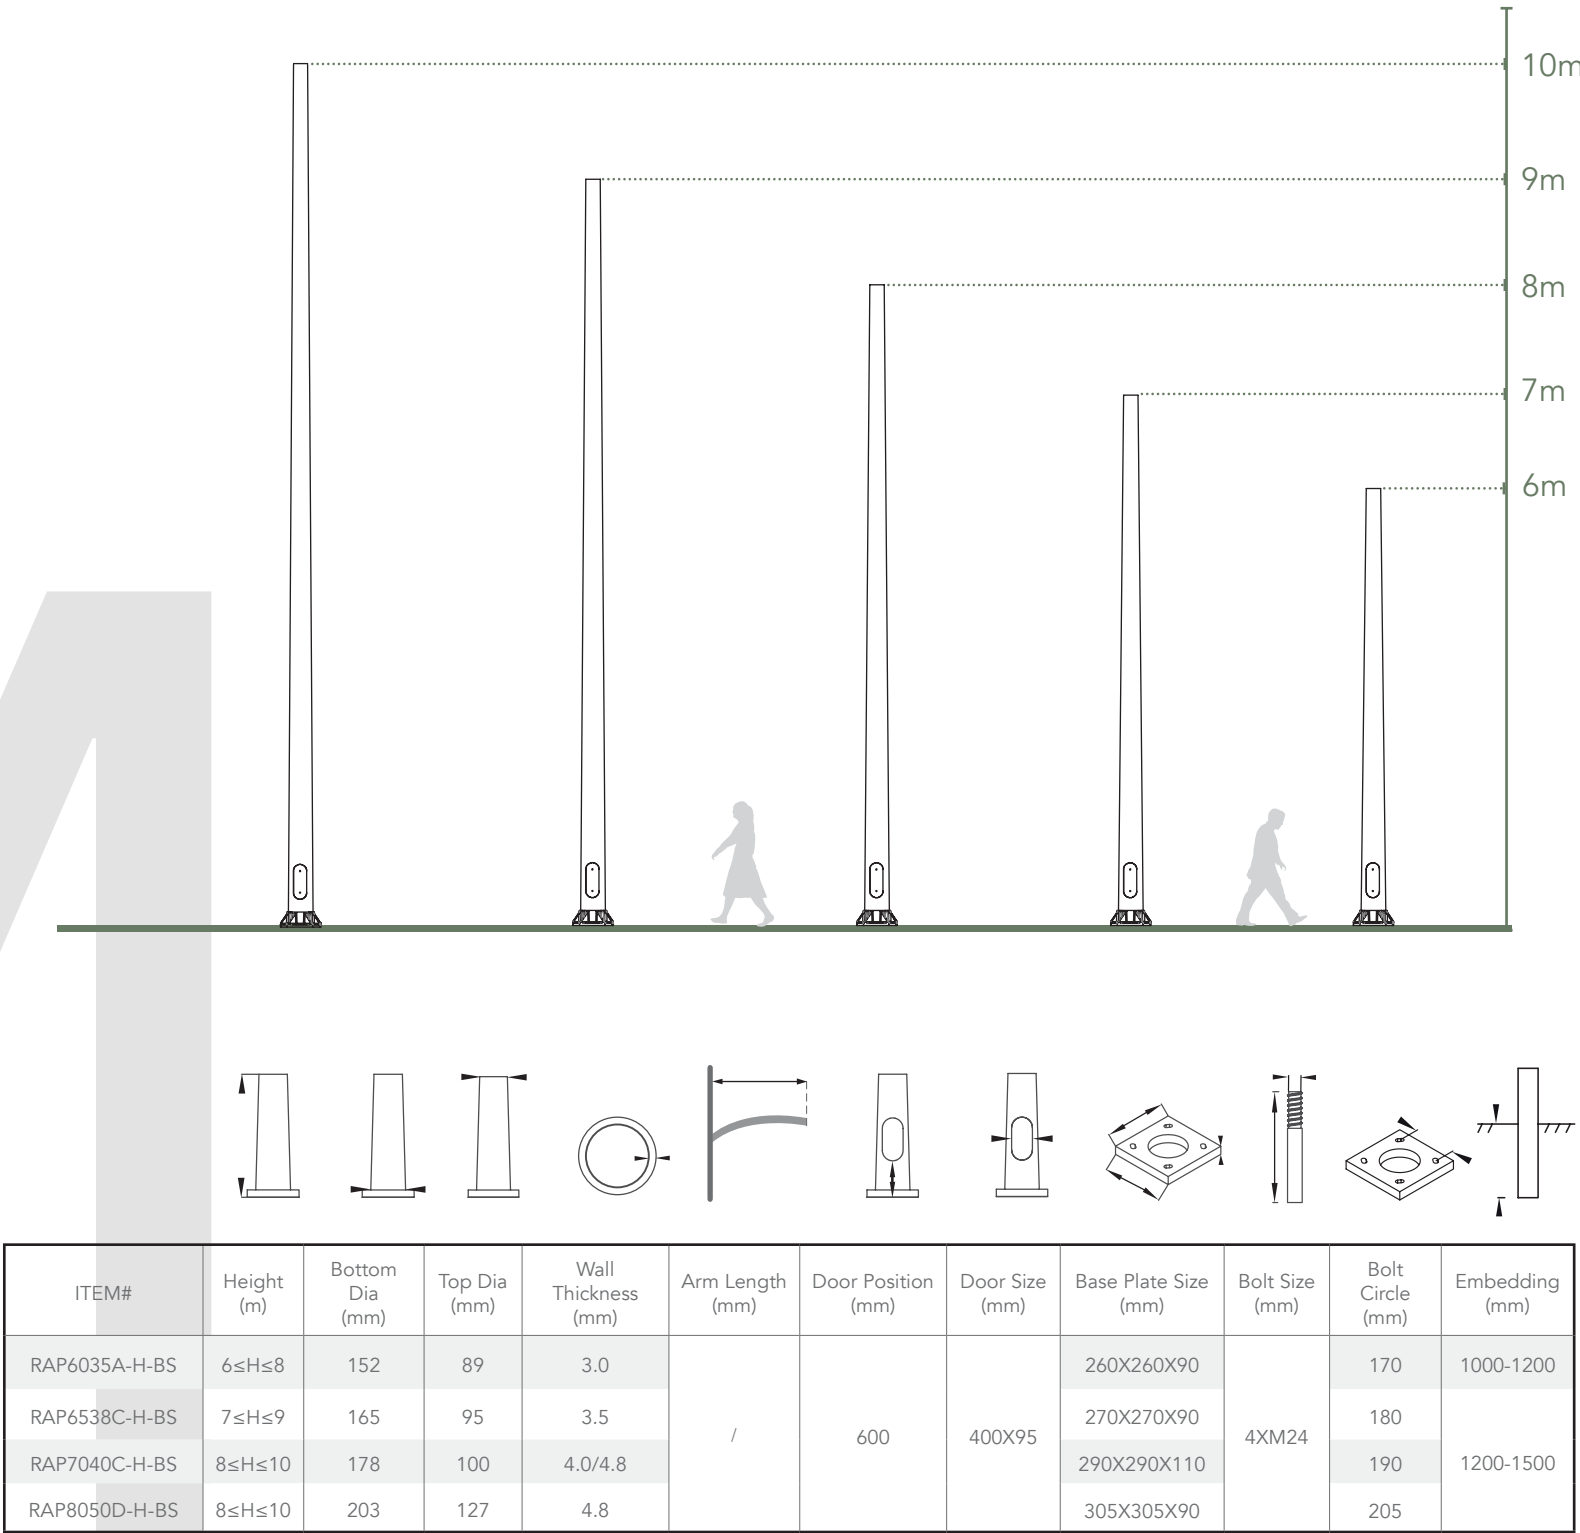

Catalog Number designates

Shaft Diameter At Base	Shaft Diameter At Top	Wall Thickness	Pole Hight	Surface Finish	Accessory
60=6.0"(152mm)	35=3.5"(89mm)	A=3.0mm	6≤H≤10	SB=Satin Brushed AD=Anodized PC=PowderCoating	See Accessories Section
65=6.5"(165mm)	38=3.8"(95mm)	B=3.5mm			
70=7.0"(178mm)	40=4.0"(100mm)	C=4.0mm			
80=8.0"(203mm)	50=5.0"(127mm)	D=4.8mm			

GENMINI .

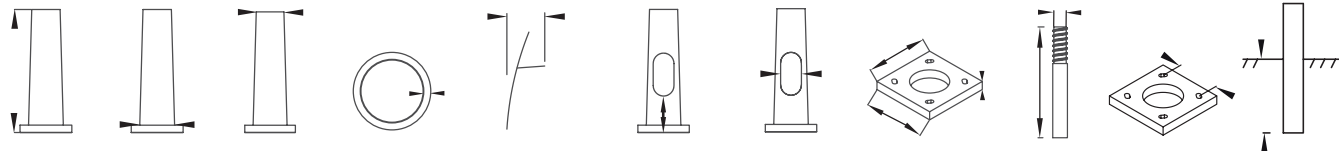
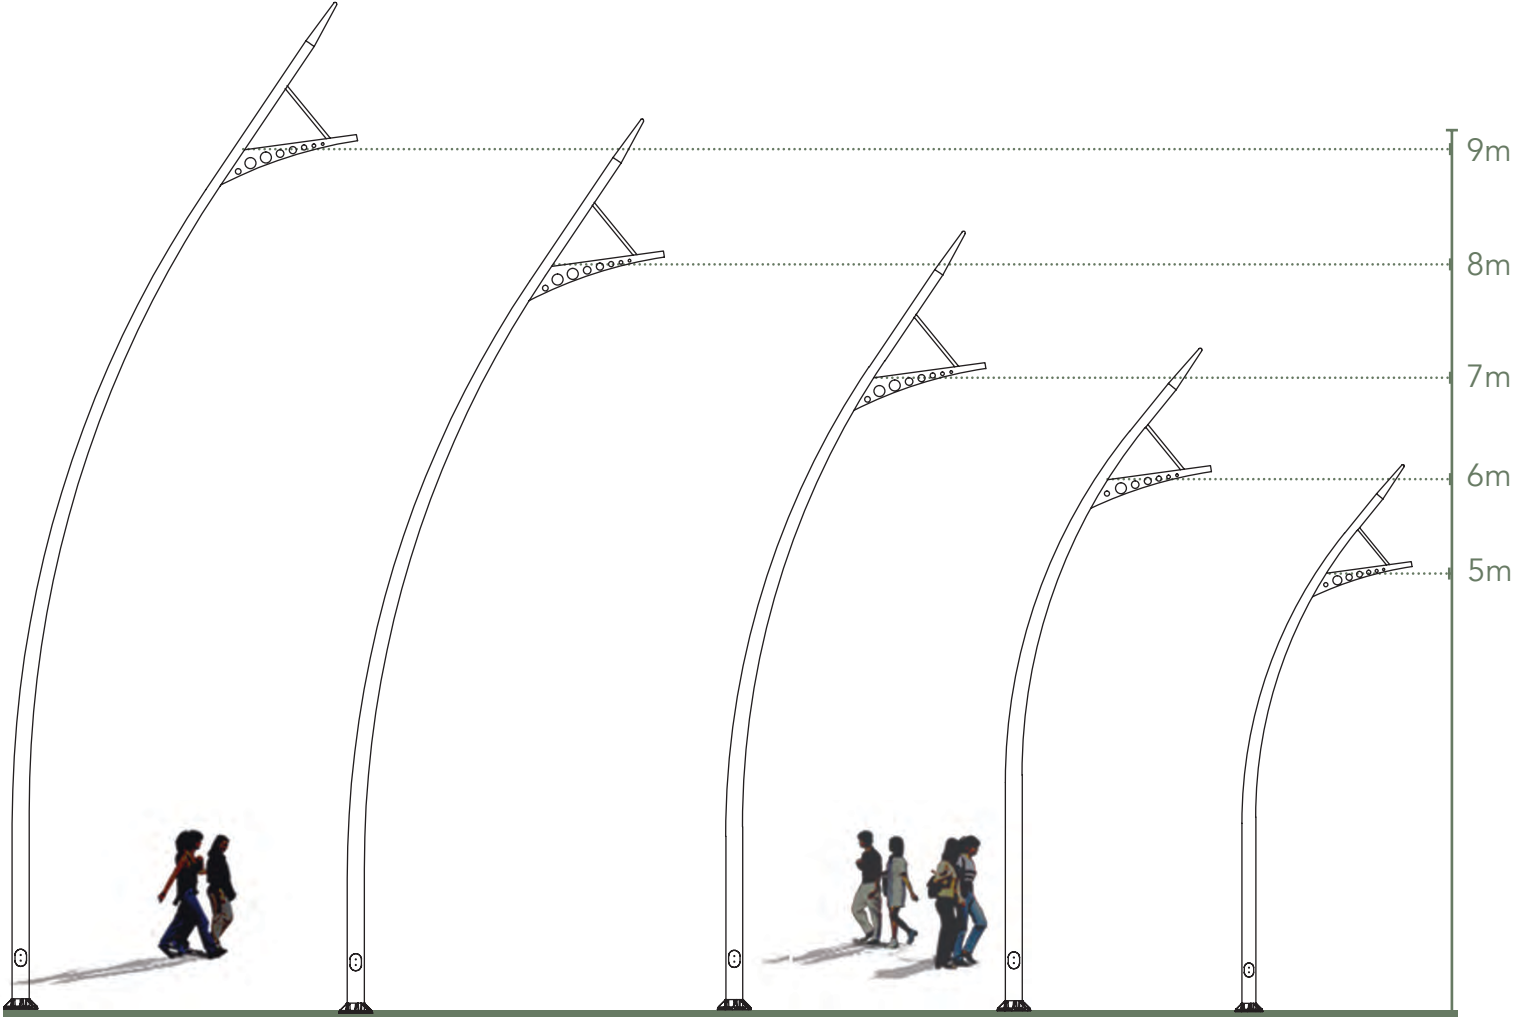


ITEM#	Height (m)	Bottom Dia (mm)	Top Dia (mm)	Wall Thickness (mm)	Arm Length (mm)	Door Position (mm)	Door Size (mm)	Base Plate Size (mm)	Bolt Size (mm)	Bolt Circle (mm)	Embedding (mm)		
RBP5530A-H-BS	5≤H≤6	140	76	3.0	1600-2400	500	400X95	240X240X75	4XM24	145	800		
RBP6035A-H-BS	6≤H≤8	152	89	3.0		600		260X260X90		170		1000-1200	
RBP6538B-H-BS	7≤H≤9	165	95	3.5				270X270X90		180			1200-1500
RBP7040C-H-BS	8≤H≤10	178	100	4.0/4.8				290X290X110		190			
RBP8050D-H-BS	8≤H≤10	203	127	4.8				305X305X90		205			

Catalog Number designates

Shaft Diameter At Base	Shaft Diameter At Top	Wall Thickness	Pole Hight	Surface Finish	Accessory
55=5.5"(140mm)	30=3.0"(76mm)	A=3.0mm	5≤H≤10	SB=Satin Brushed AD=Anodized PC=Powder Coating	See Accessories Section
60=6.0"(152mm)	35=3.5"(89mm)	B=3.5mm			
65=6.5"(165mm)	38=3.8"(95mm)	C=4.0mm			
70=7.0"(178mm)	40=4.0"(100mm)	D=4.8mm			
80=8.0"(203mm)	50=5.0"(127mm)	/			

LEO .

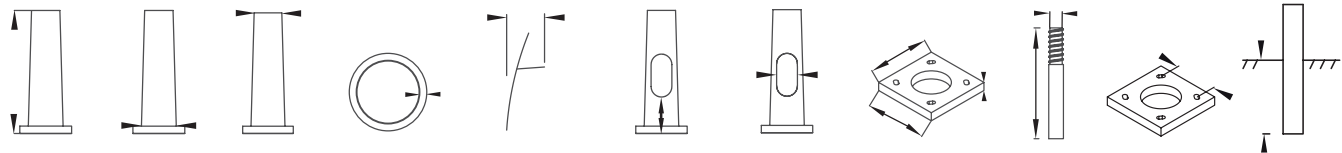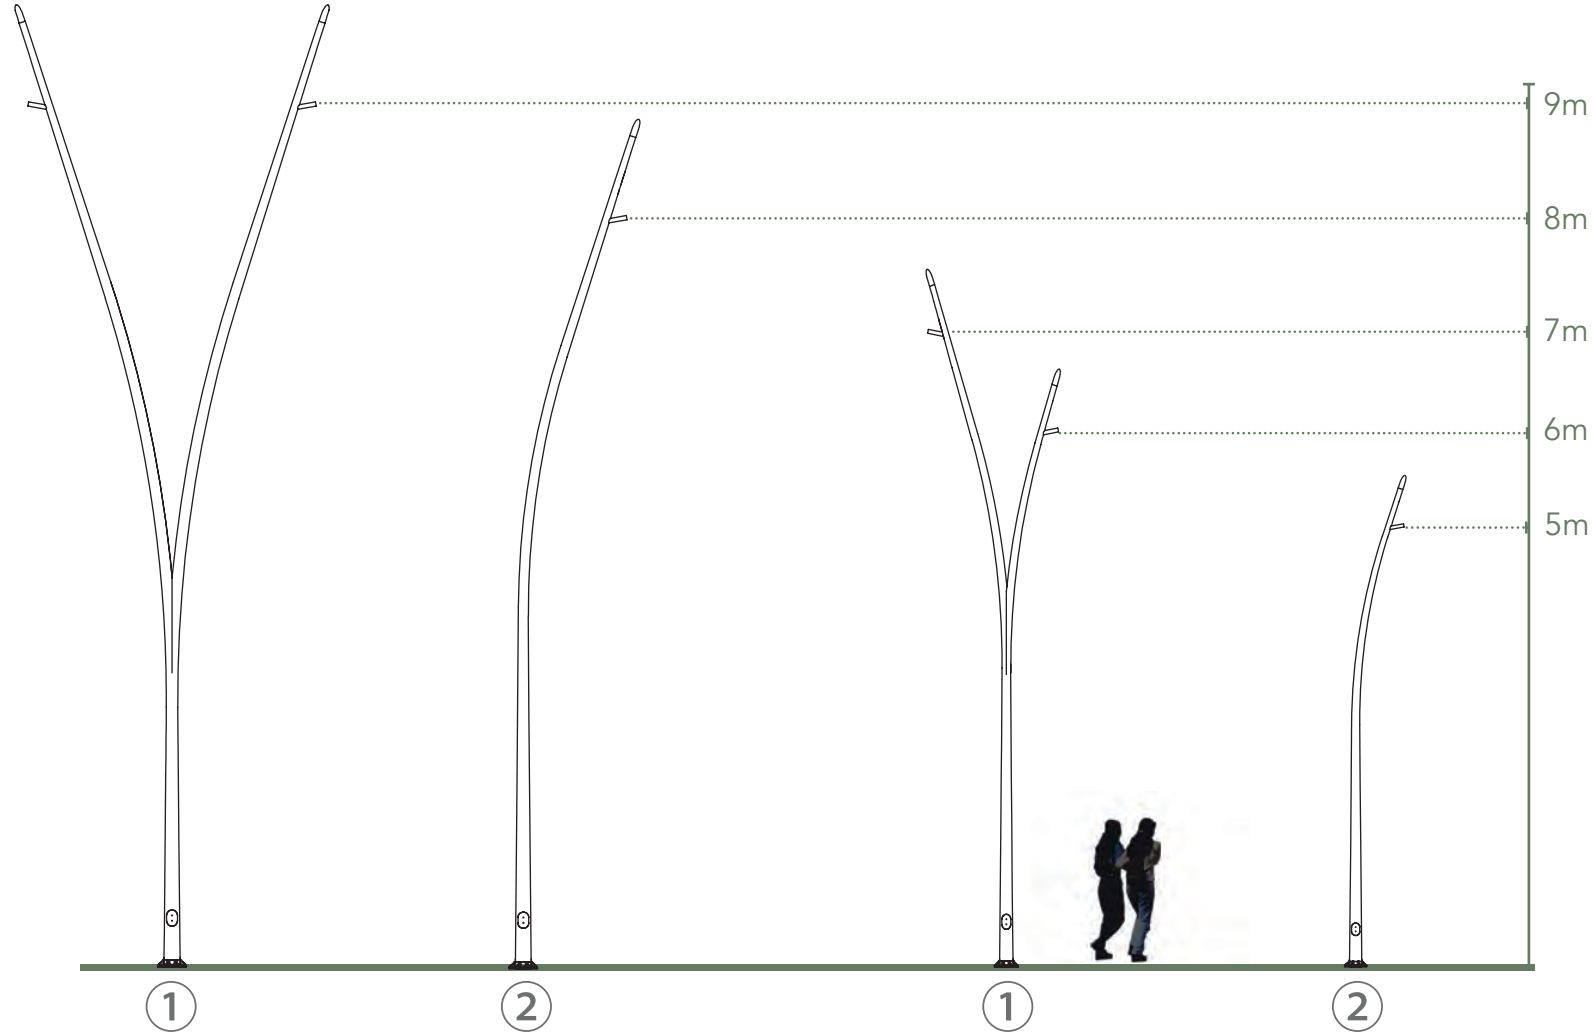

ITEM#	Height (m)	Bottom Dia (mm)	Top Dia (mm)	Wall Thickness (mm)	Arm Length (mm)	Door Position (mm)	Door Size (mm)	Base Plate Size (mm)	Bolt Size (mm)	Bolt Circle (mm)	Embedding (mm)
RCP5530A-H-BS	5≤H≤6	140	76	3.0	1100-2200	500	400X95	240X240X75	4XM24	145	800
RCP6035A-H-BS	6≤H≤8	152	89	3.0		600		260X260X90		170	1000-1200
RCP6538B-H-BS	7≤H≤9	165	95	3.5				270X270X90		180	1200-1500
RCP7040C-H-BS	8≤H≤10	178	100	4.0/4.8				290X290X110		190	
RCP8050D-H-BS	8≤H≤10	203	127	4.8				305X305X90		205	


Catalog Number designates

Shaft Diameter At Base	Shaft Diameter At Top	Wall Thickness	Pole Hight	Surface Finish	Accessory
55=5.5"(140mm)	30=3.0"(76mm)	A=3.0mm	5≤H≤10	SB=Satin Brushed AD=Anodized PC=Powder Coating	See Accessories Section
60=6.0"(152mm)	35=3.5"(89mm)	B=3.5mm			
65=6.5"(165mm)	38=3.8"(95mm)	C=4.0mm			
70=7.0"(178mm)	40=4.0"(100mm)	D=4.8mm			
80=8.0"(203mm)	50=5.0"(127mm)	/			

visit our website for all current information and certifications



CAPE .

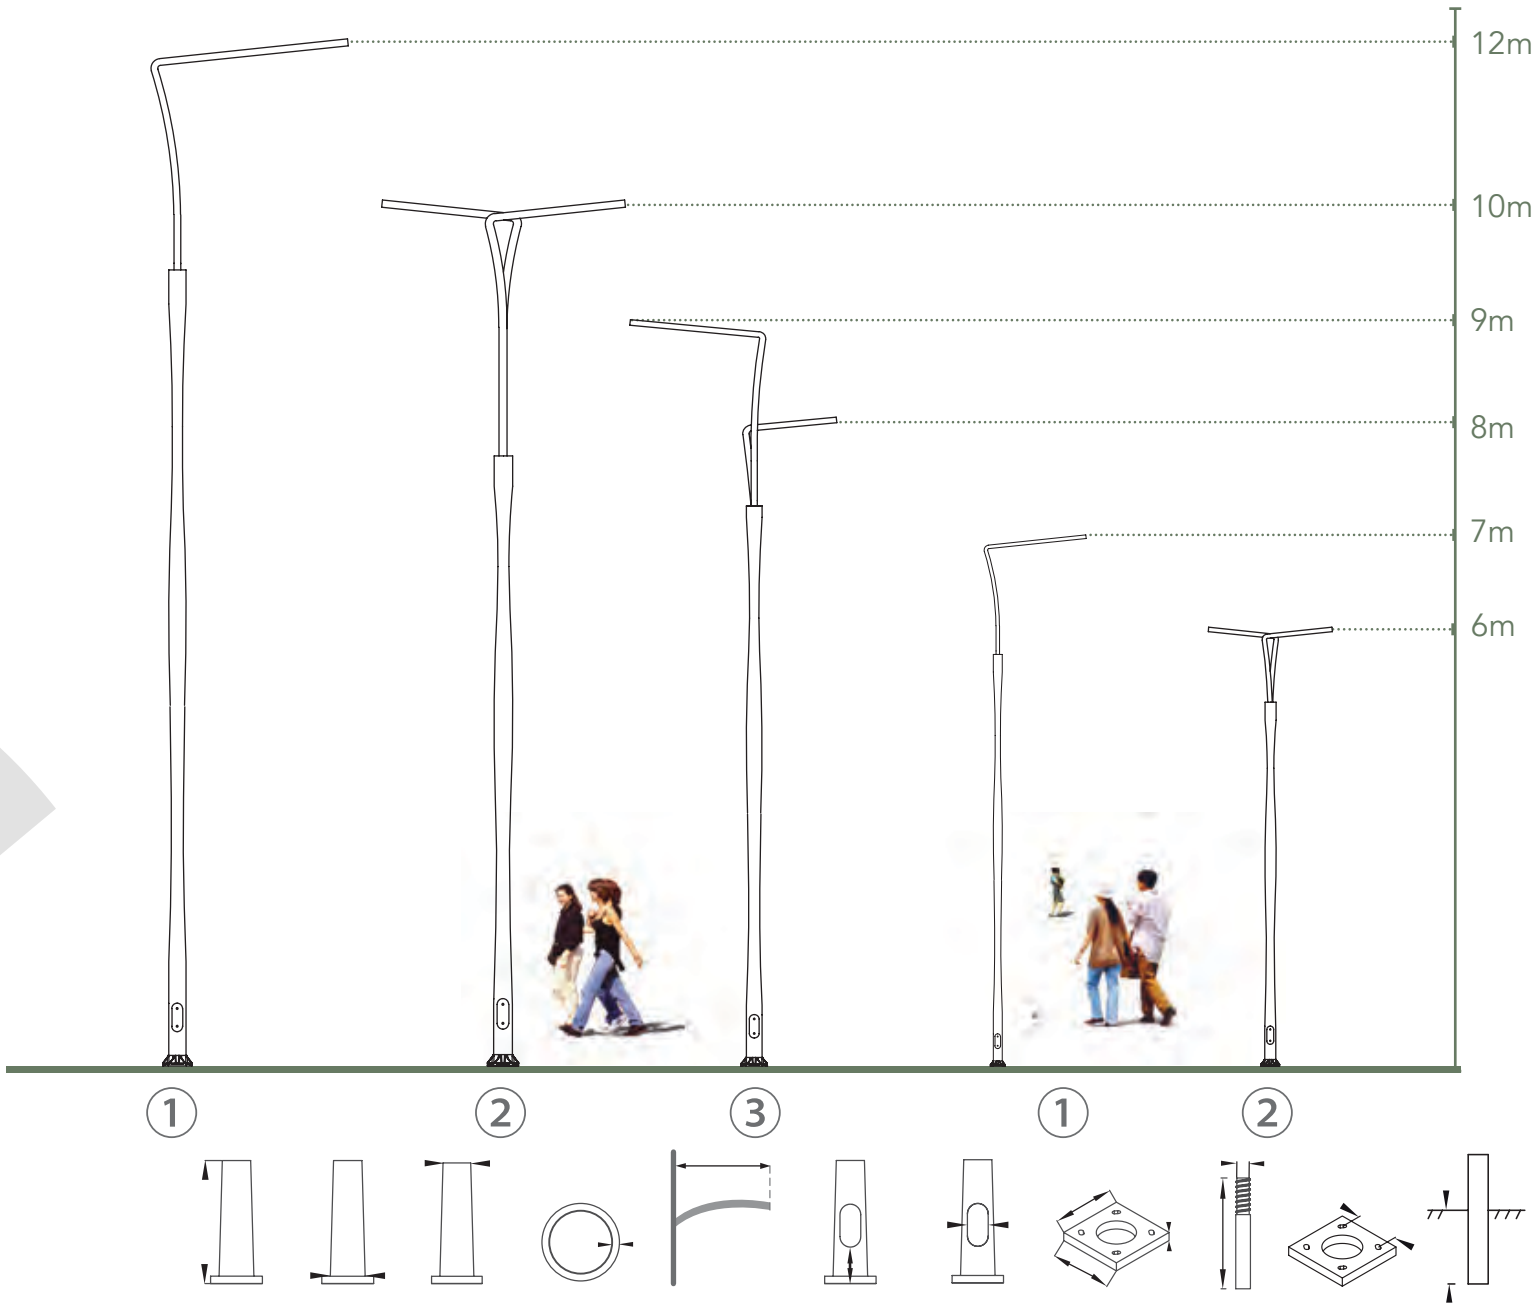

ITEM#	Height (m)	Bottom Dia (mm)	Top Dia (mm)	Wall Thickness (mm)	Arm Length (mm)	Door Position (mm)	Door Size (mm)	Base Plate Size (mm)	Bolt Size (mm)	Bolt Circle (mm)	Embedding (mm)
RCP6060A-H-BS	6≤H≤8	152	152	3.0	800-2000	600	250X95	260X260X90	4XM24	170	1000-1200
RCP6565B-H-BS	7≤H≤9	165	165	3.5				270X270X90		180	
RCP7070C-H-BS	8≤H≤10	178	178	4.0/4.8				290X290X110		190	
RCP8080D-H-BS		203	203	4.8				305X305X90		205	



Catalog Number designates

Shaft Diameter At Base	Shaft Diameter At Top	Wall Thickness	Pole Hight	Surface Finish	Accessory
60=6.0"(152mm)	60=6.0"(152mm)	A=3.0mm	6≤H≤12	SB=Satin Brushed AD=Anodized PC=Powder Coating	See Accessories Section
65=6.5"(165mm)	65=6.5"(165mm)	B=3.5mm			
70=7.0"(178mm)	70=7.0"(178mm)	C=4.0mm			
80=8.0"(203mm)	80=8.0"(203mm)	D=4.8mm			

visit our website for all current information and certifications



BERMUDA .

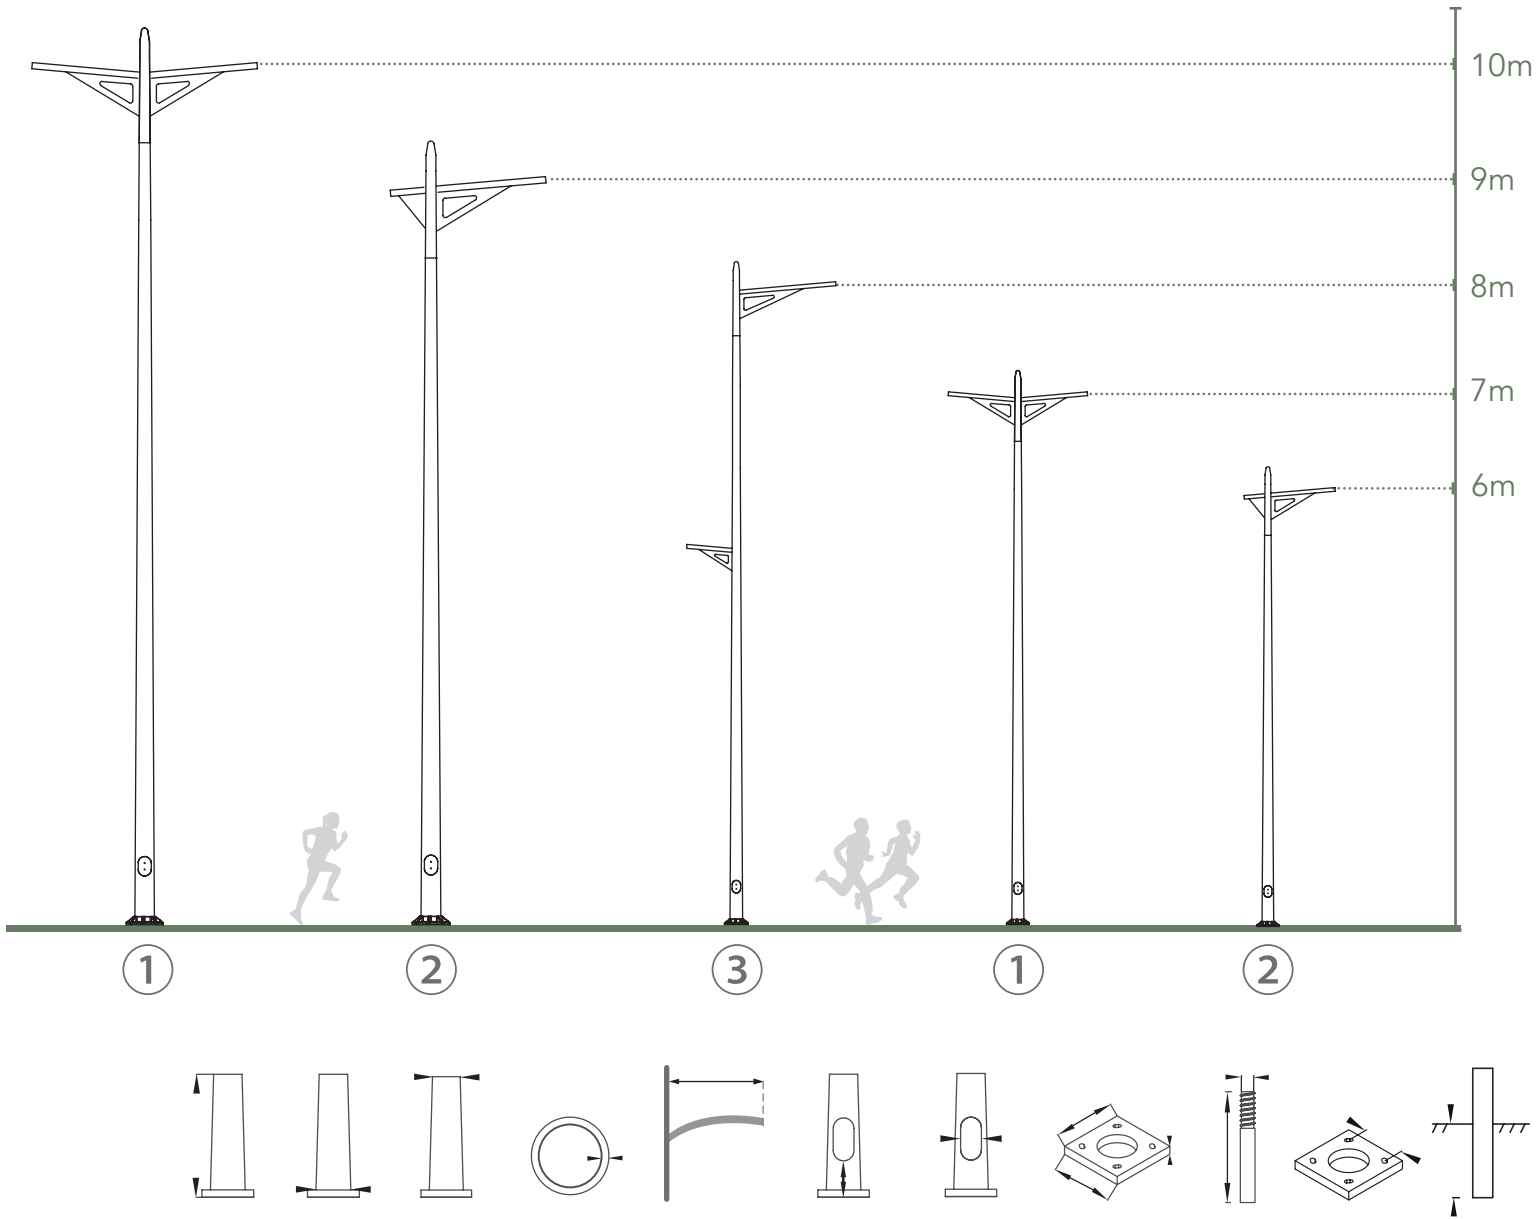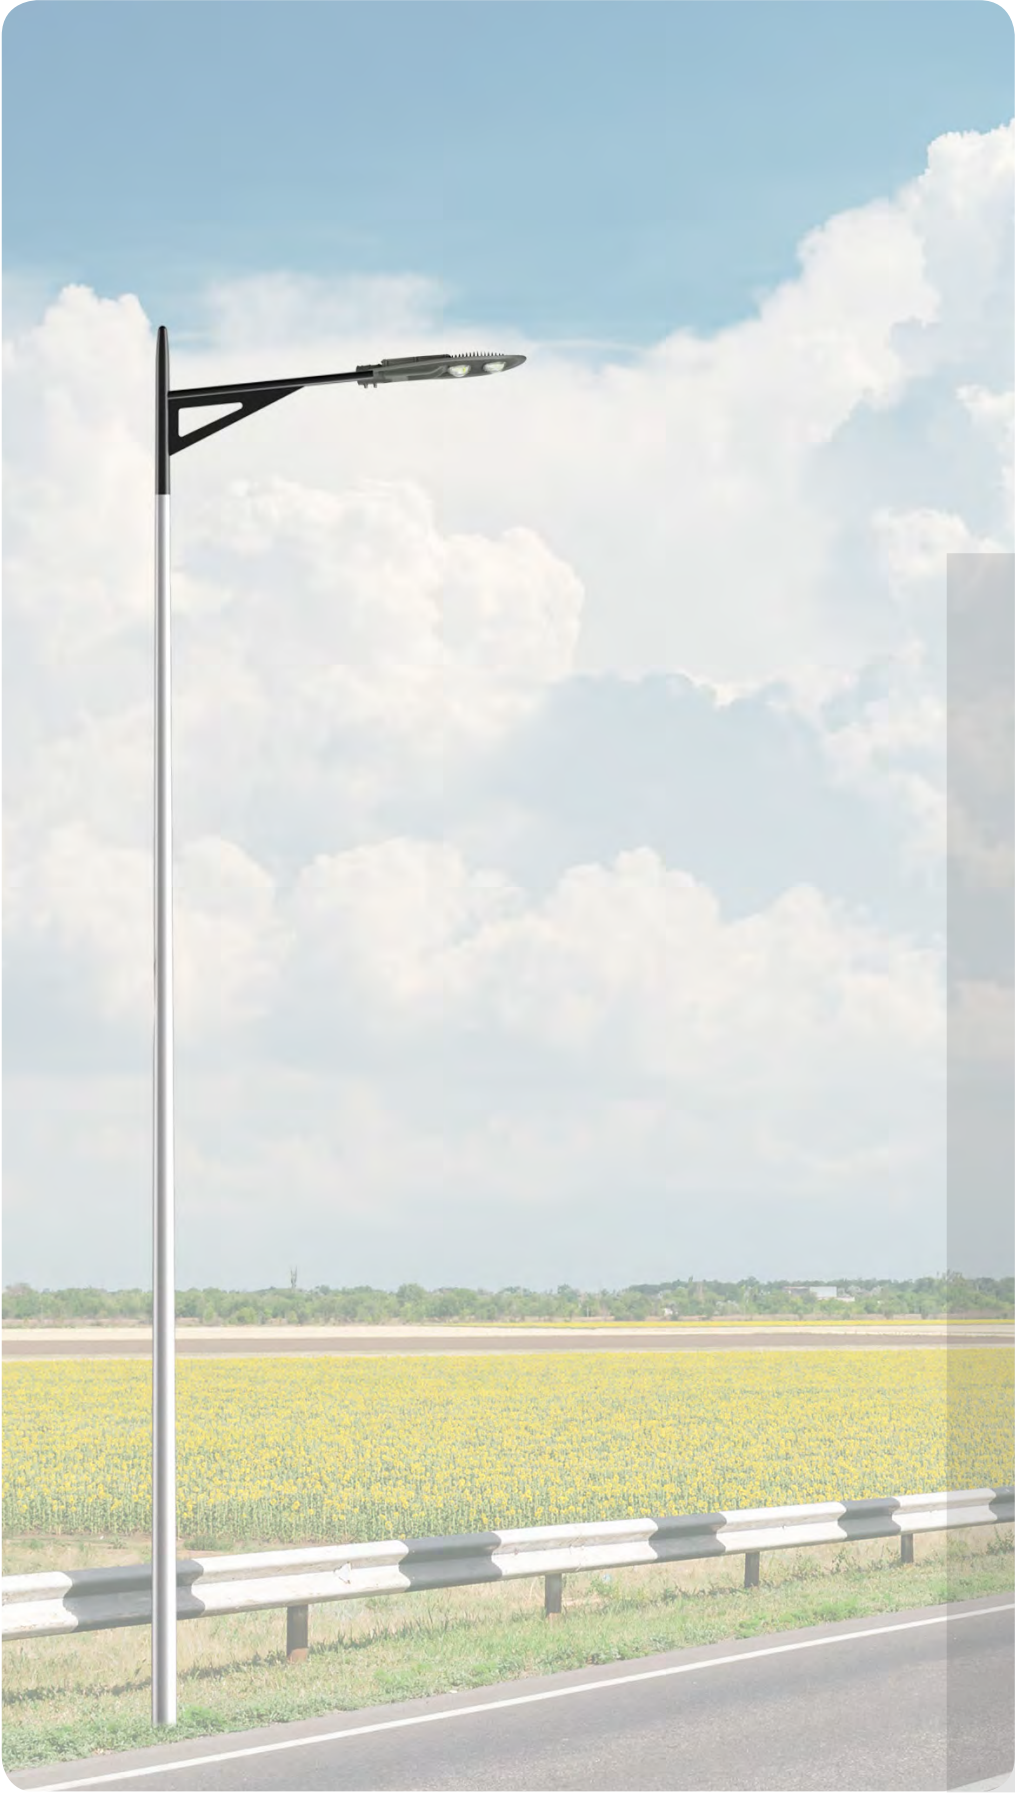


ITEM#	Height (m)	Bottom Dia (mm)	Top Dia (mm)	Wall Thickness (mm)	Arm Length (mm)	Door Position (mm)	Door Size (mm)	Base Plate Size (mm)	Bolt Size (mm)	Bolt Circle (mm)	
RDP6035A-H-BS	6≤H≤8	152	89	3.0	800-1500	600	400X95	260X260X90	4XM24	170	1000-1200
RDP6538B-H-BS	7≤H≤9	165	95	3.5				270X270X90		180	1200-1500
RDP7040C-H-BS		178	100	4.0/4.8				290X290X110		190	
RDP8050D-H-BS		203	127	4.8				305X305X90		205	

Catalog Number designates

Shaft Diameter At Base	Shaft Diameter At Top	Wall Thickness	Pole Hight	Surface Finish	Accessory
60=6.0"(152mm)	35=3.5"(89mm)	A=3.0mm	6≤H≤10	SB=Satin Brushed AD=Anodized PC=Powder Coating	See Accessories Section
65=6.5"(165mm)	38=3.8"(95mm)	B=3.5mm			
70=7.0"(178mm)	40=4.0"(100mm)	C=4.0mm			
80=8.0"(203mm)	50=5.0"(127mm)	D=4.8mm			


NILE .

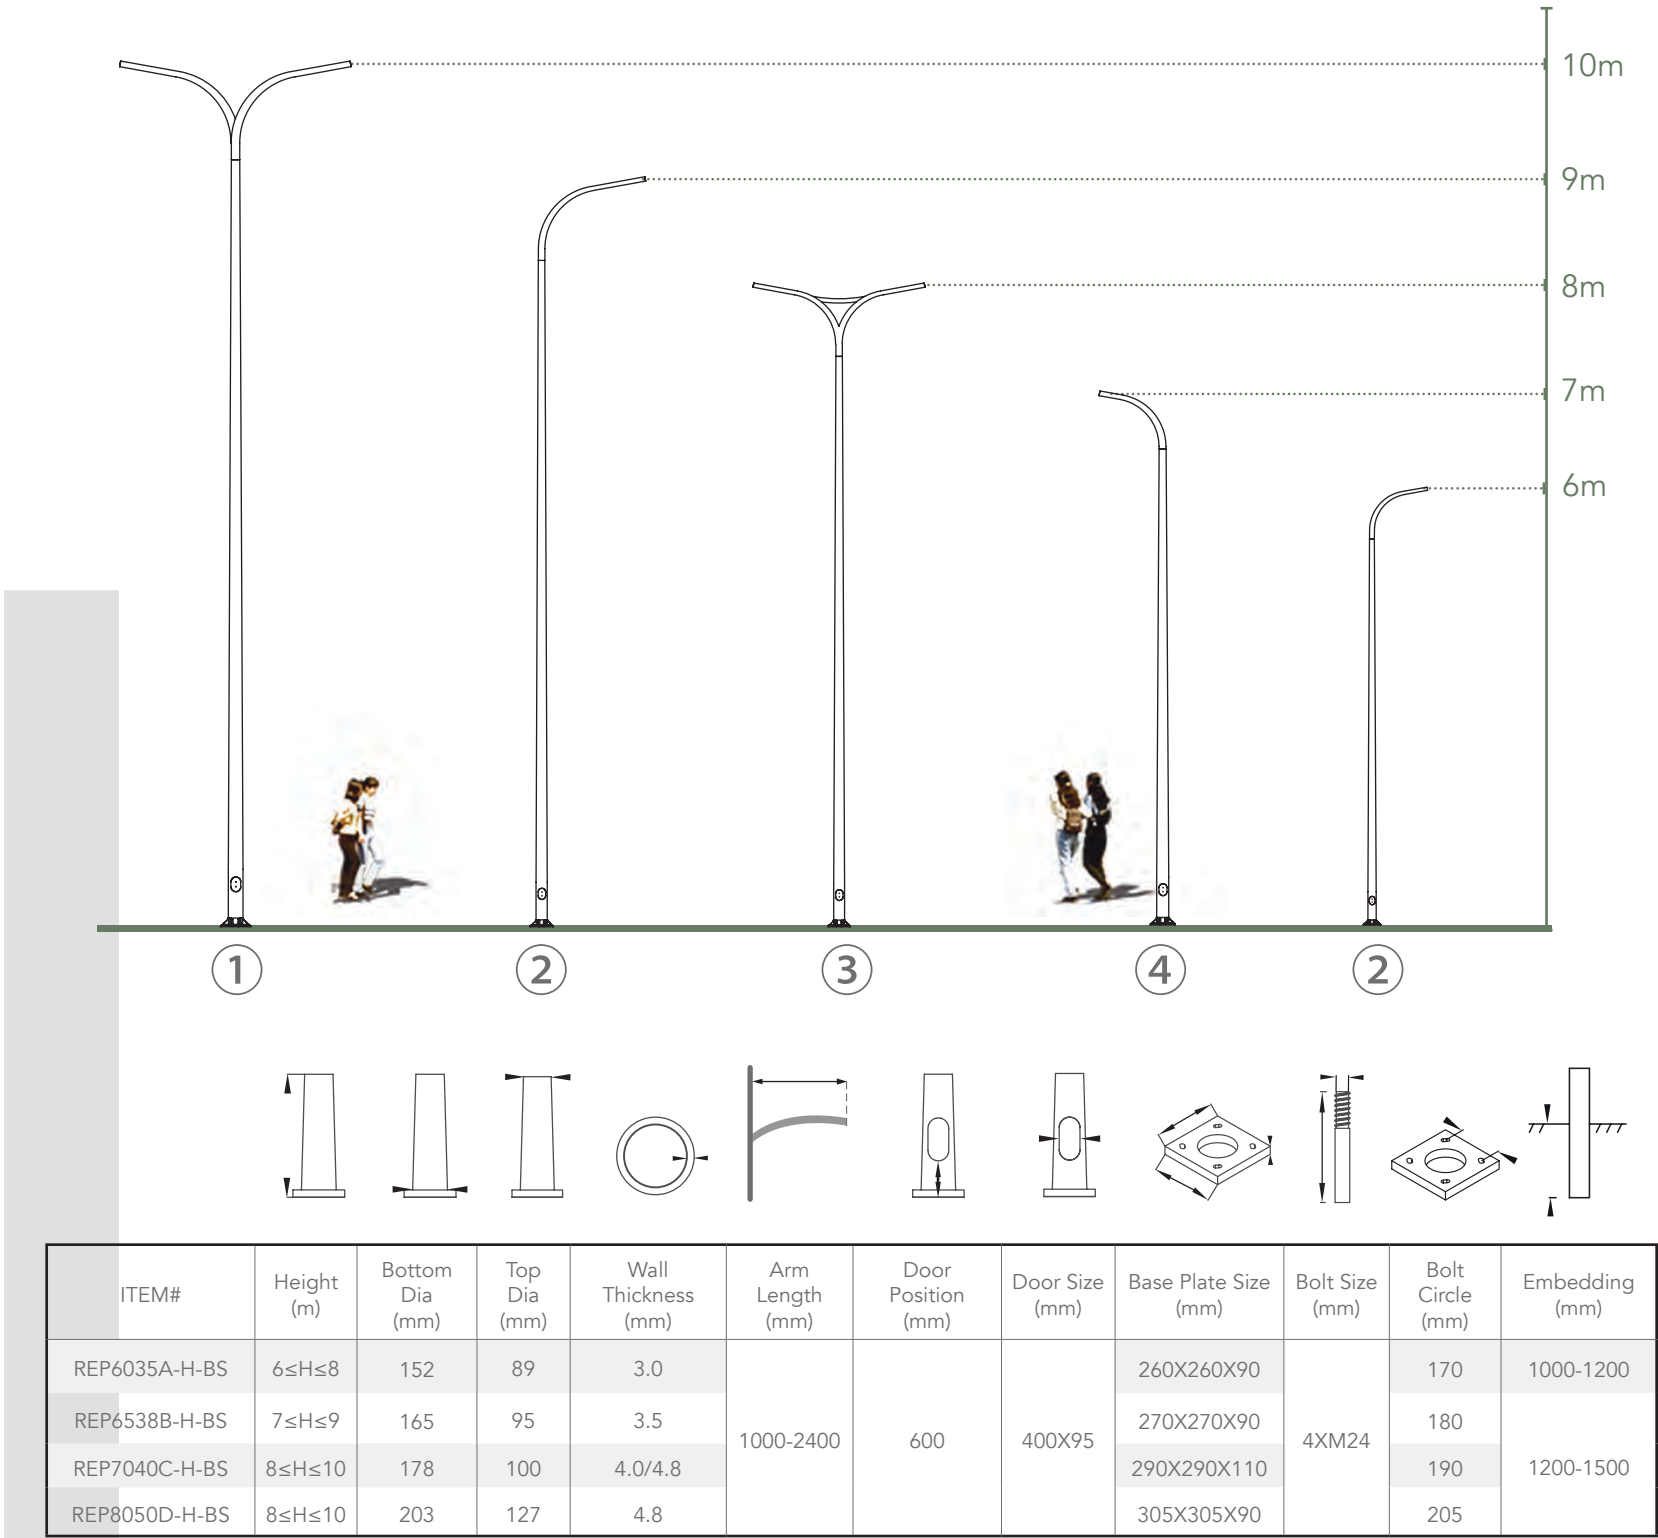

Catalog Number designates

Shaft Diameter At Base	Shaft Diameter At Top	Wall Thickness	Pole Hight	Surface Finish	Accessory
60=6.0"(152mm)	35=3.5"(89mm)	A=3.0mm	6≤H≤10	SB=Satin Brushed AD=Anodized PC=PowderCoating	See Accessories Section
65=6.5"(165mm)	38=3.8"(95mm)	B=3.5mm			
70=7.0"(178mm)	40=4.0"(100mm)	C=4.0mm			
80=8.0"(203mm)	50=5.0"(127mm)	D=4.8mm			

SAHARA .

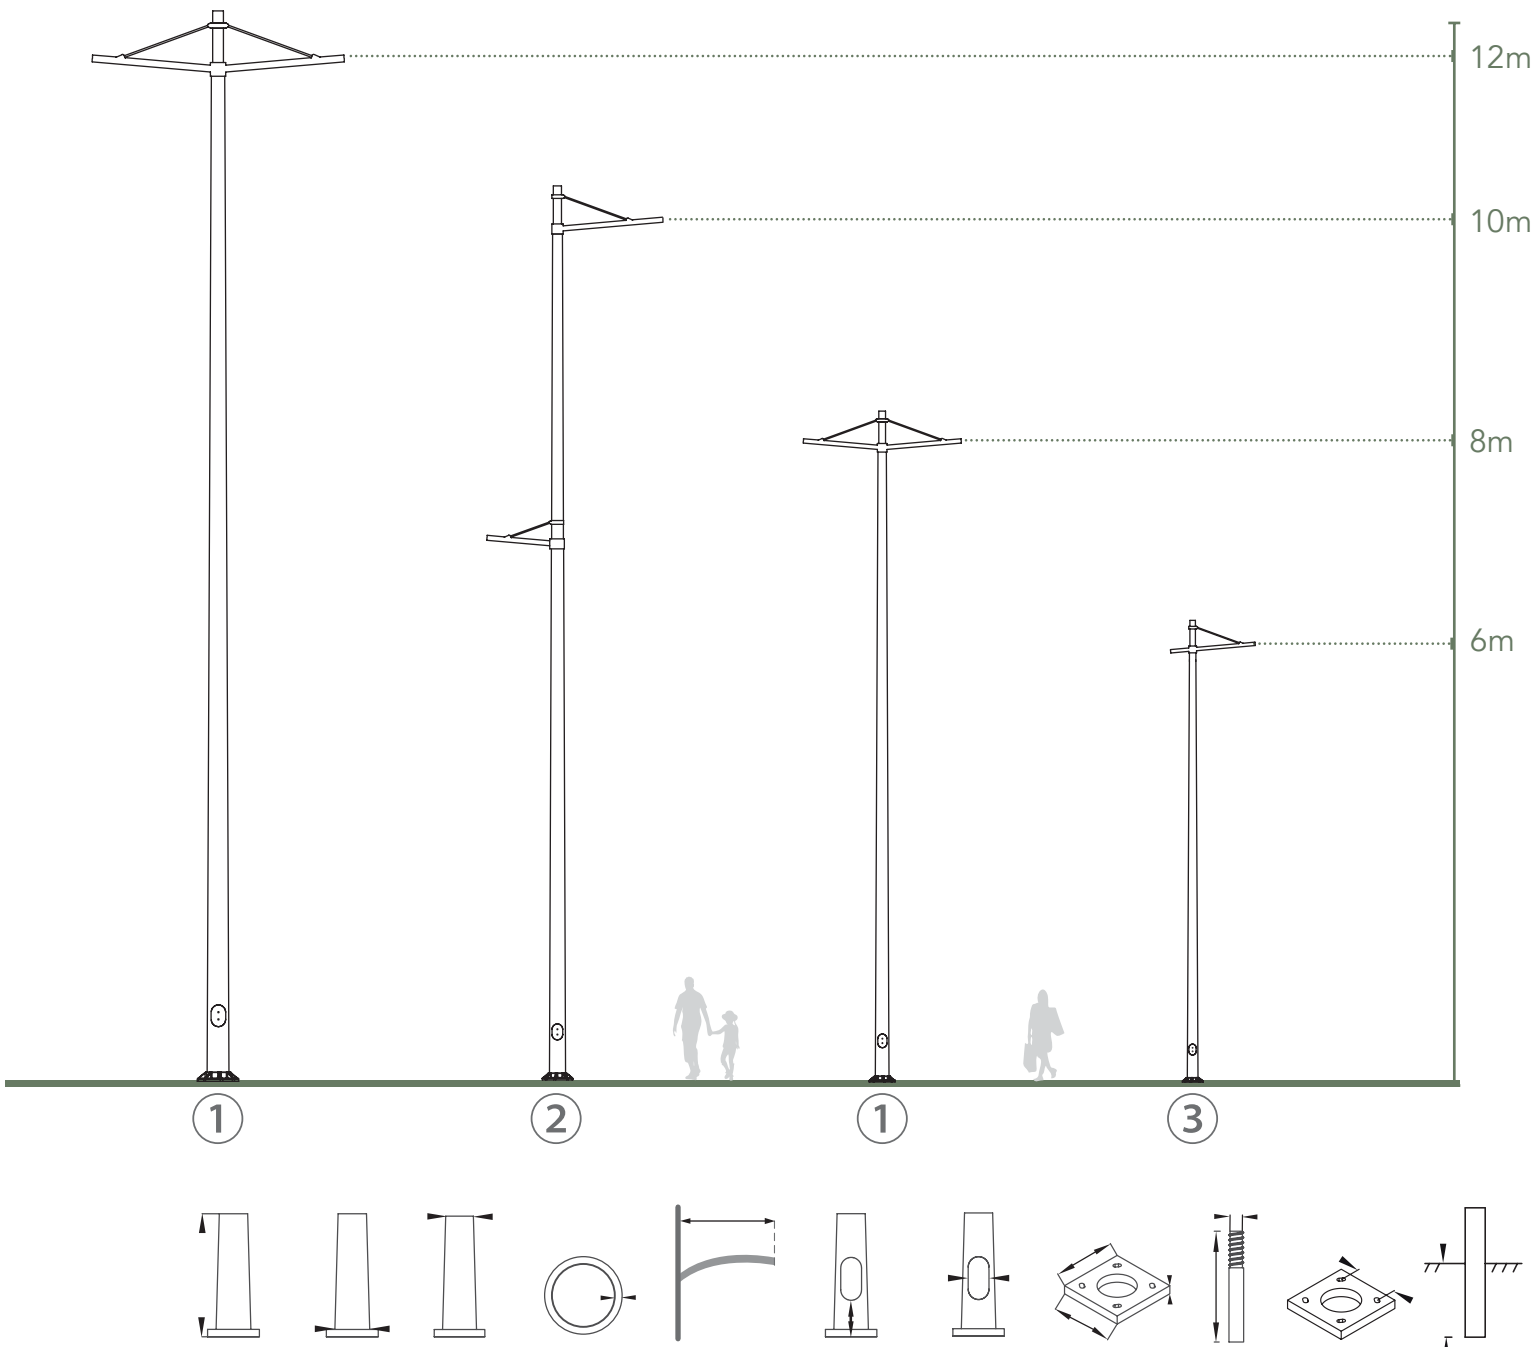

ITEM#	Height (m)	Bottom Dia (mm)	Top Dia (mm)	Wall Thickness (mm)	Arm Length (mm)	Door Position (mm)	Door Size (mm)	Base Plate Size (mm)	Bolt Size (mm)	Bolt Circle (mm)	Embedding (mm)
RFP6035A-H-BS	6≤H≤8	152	89	3.0	800-1500	600	400X95	260X260X90	4XM24	170	1000-1200
RFP6538B-H-BS	7≤H≤9	165	95	3.5				270X270X90		180	1200-1500
RFP7040C-H-BS	8≤H≤10	178	100	4.0/4.8				290X290X110		190	
RFP8050D-H-BS	10≤H≤12	203	127	4.8				305X305X90		205	


Catalog Number designates

Shaft Diameter At Base	Shaft Diameter At Top	Wall Thickness	Pole Hight	Surface Finish	Accessory
60=6.0"(152mm)	35=3.5"(89mm)	A=3.0mm	6≤H≤12	SB=Satin Brushed AD=Anodized PC=Powder Coating	See Accessories Section
65=6.5"(165mm)	38=3.8"(95mm)	B=3.5mm			
70=7.0"(178mm)	40=4.0"(100mm)	C=4.0mm			
80=8.0"(203mm)	50=5.0"(127mm)	D=4.8mm			

visit our website for all current information and certifications



EFFIEL .

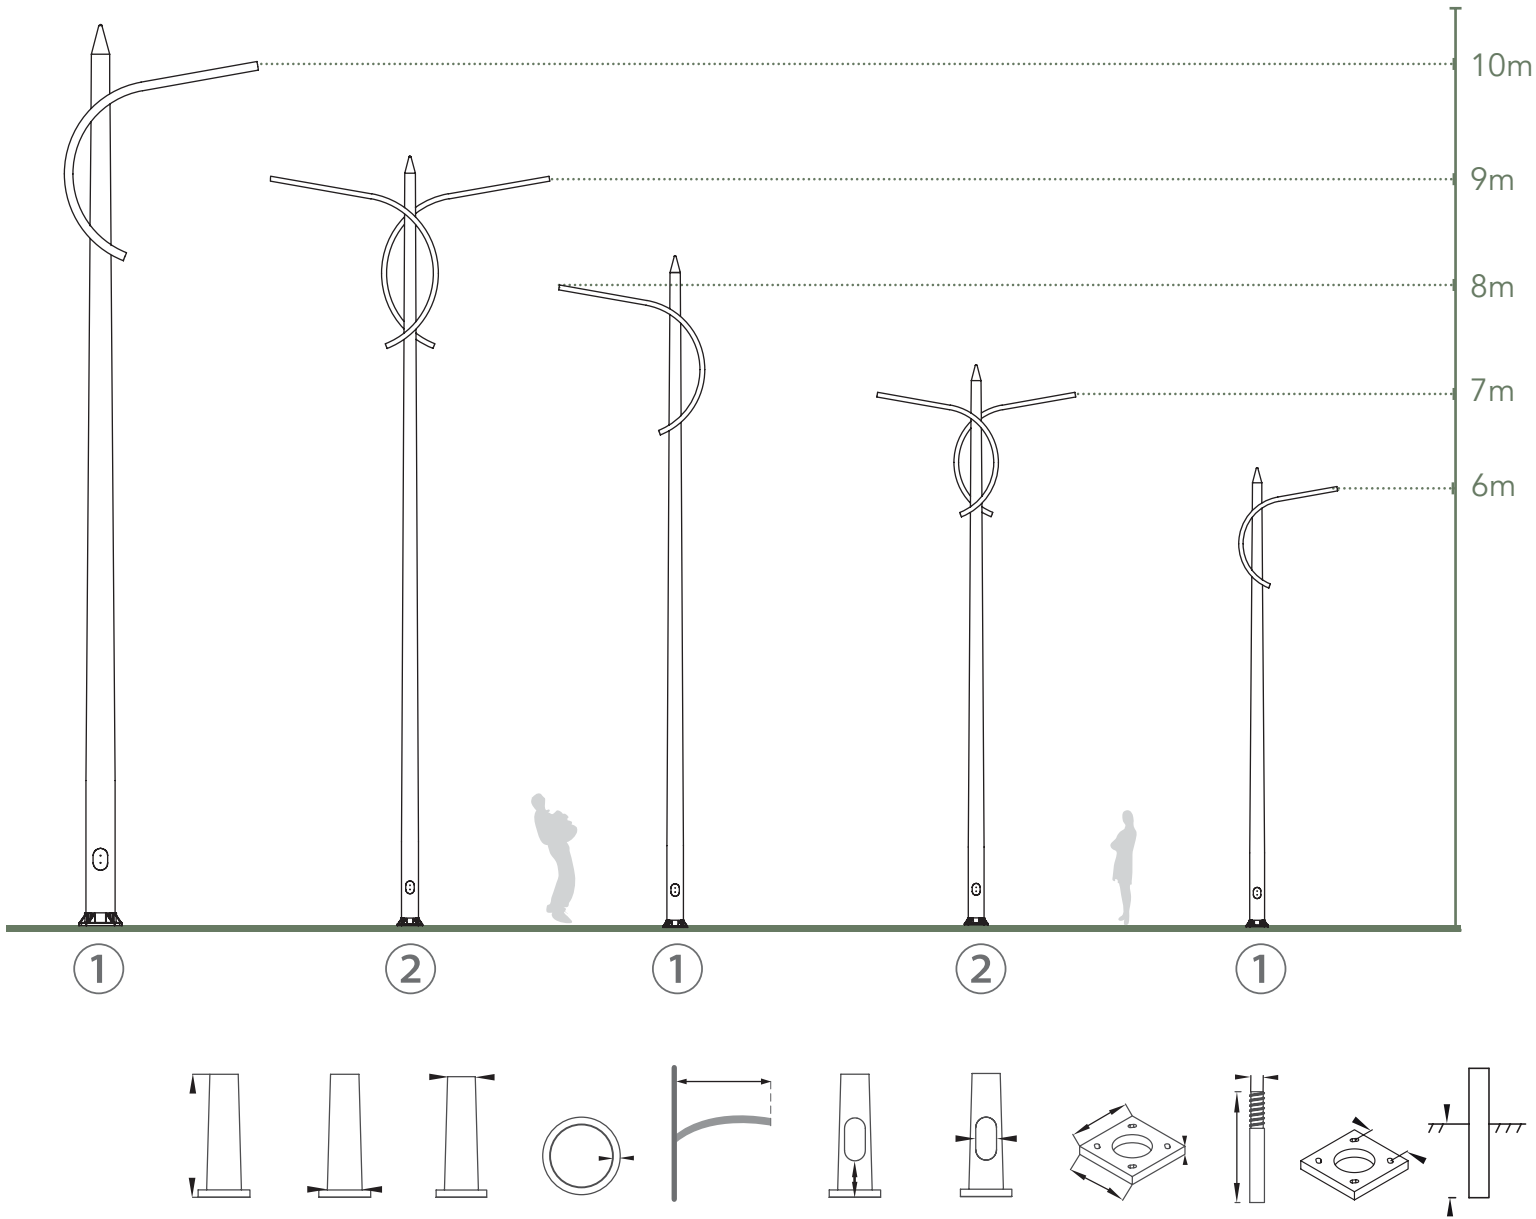

ITEM#	Height (m)	Bottom Dia (mm)	Top Dia (mm)	Wall Thickness (mm)	Arm Length (mm)	Door Position (mm)	Door Size (mm)	Base Plate Size (mm)	Bolt Size (mm)	Bolt Circle (mm)	Embedding (mm)
RGP6035A-H-BS	6≤H≤8	152	89	3.0	800-1500	600	400X95	260X260X90	4XM24	170	1000-1200
RGP6538B-H-BS	7≤H≤9	165	95	3.5				270X270X90		180	1200-1500
RGP7040C-H-BS	8≤H≤10	178	100	4.0/4.8				290X290X110		190	
RGP8050D-H-BS	8≤H≤10	203	127	4.8				305X305X90		205	


Catalog Number designates

Shaft Diameter At Base	Shaft Diameter At Top	Wall Thickness	Pole Hight	Surface Finish	Accessory
60=6.0"(152mm)	35=3.5"(89mm)	A=3.0mm	6≤H≤10	SB=Satin Brushed AD=Anodized PC=Powder Coating	See Accessories Section
65=6.5"(165mm)	38=3.8"(95mm)	B=3.5mm			
70=7.0"(178mm)	40=4.0"(100mm)	C=4.0mm			
80=8.0"(203mm)	50=5.0"(127mm)	D=4.8mm			

visit our website for all current information and certifications



NAIROBI .



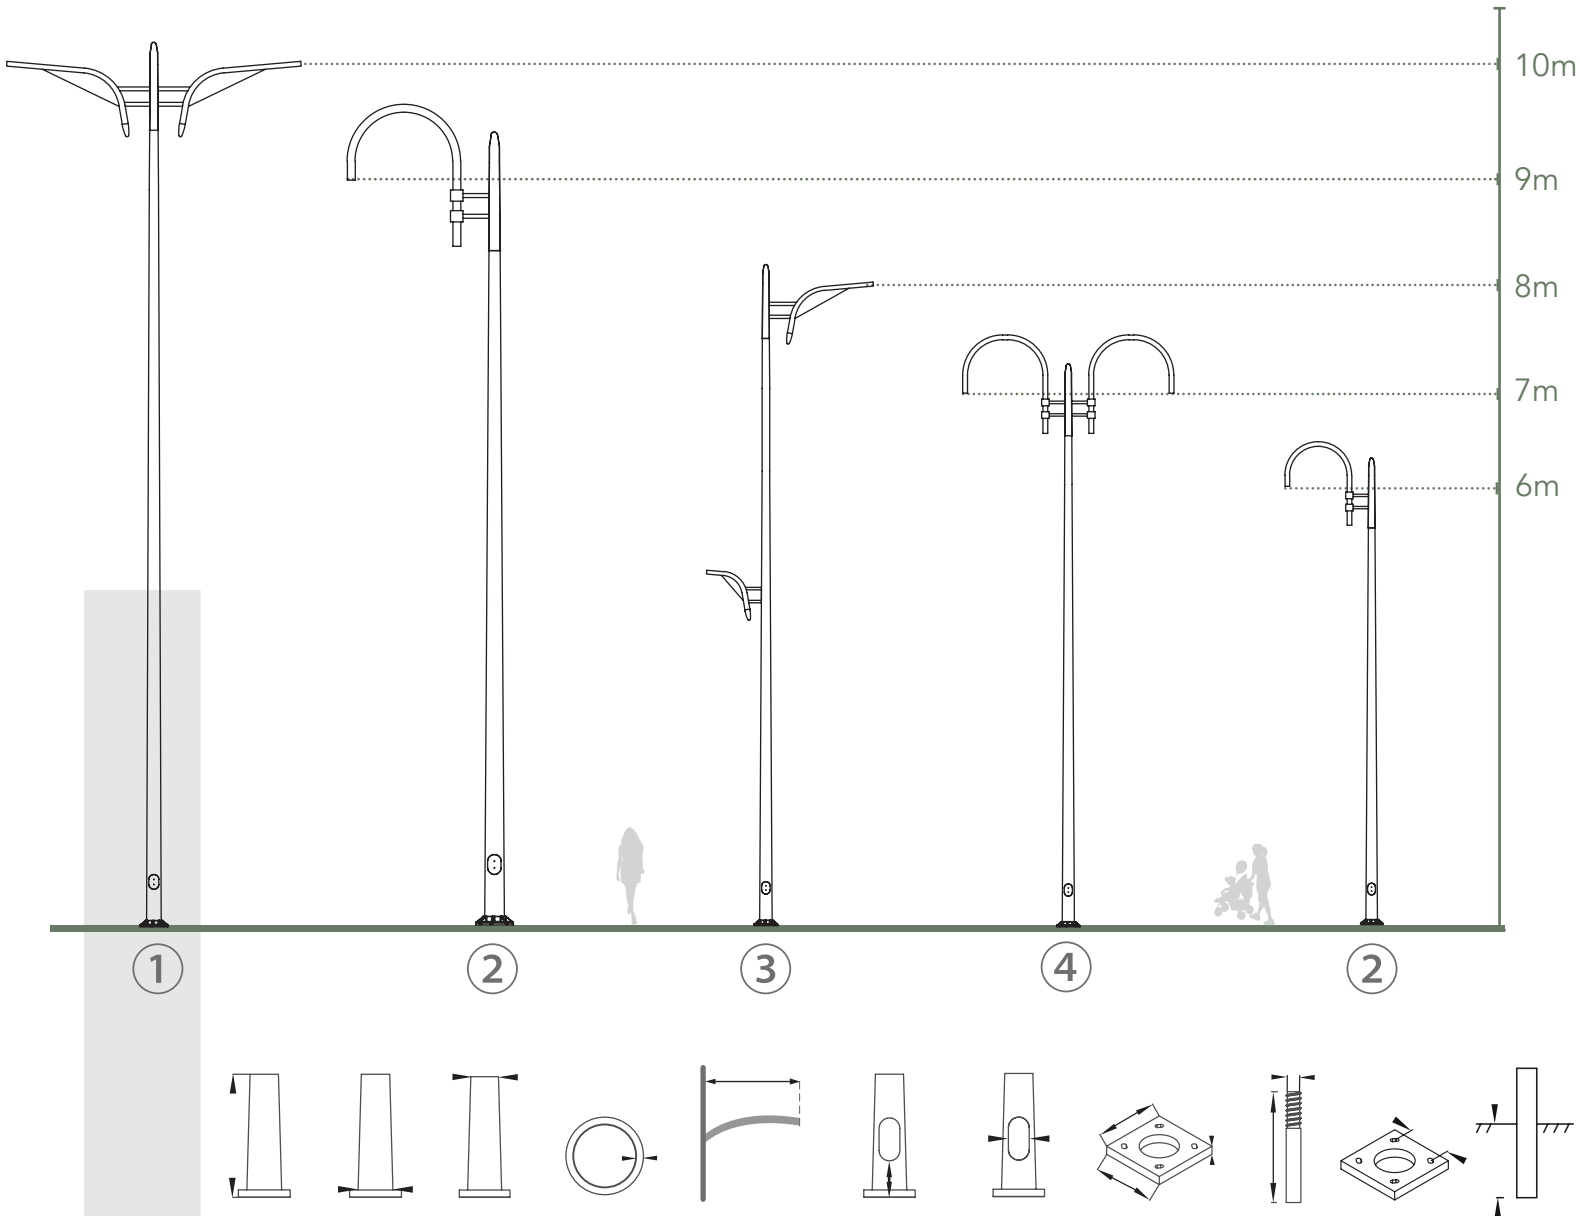


ITEM#	Height (m)	Bottom Dia (mm)	Top Dia (mm)	Wall Thickness (mm)	Arm Length (mm)	Door Position (mm)	Door Size (mm)	Base Plate Size (mm)	Bolt Size (mm)	Bolt Circle (mm)	Embedding (mm)
RHP6035A-H-BS	6≤H≤8	152	89	3.0	800-1000	600	400X95	260X260X90	4XM24	170	1000-1200
RHP6538B-H-BS	7≤H≤9	165	95	3.5				270X270X90		180	1200-1500
RHP7040C-H-BS	8≤H≤10	178	100	4.0/4.8				290X290X110		190	
RHP8050D-H-BS	8≤H≤10	203	127	4.8				305X305X90		205	

Catalog Number designates

Shaft Diameter At Base	Shaft Diameter At Top	Wall Thickness	Pole Hight	Surface Finish	Accessory
60=6.0"(152mm)	35=3.5"(89mm)	A=3.0mm	6≤H≤10	SB=Satin Brushed AD=Anodized PC=PowderCoating	See Accessories Section
65=6.5"(165mm)	38=3.8"(95mm)	B=3.5mm			
70=7.0"(178mm)	40=4.0"(100mm)	C=4.0mm			
80=8.0"(203mm)	50=5.0"(127mm)	D=4.8mm			

EASTER .

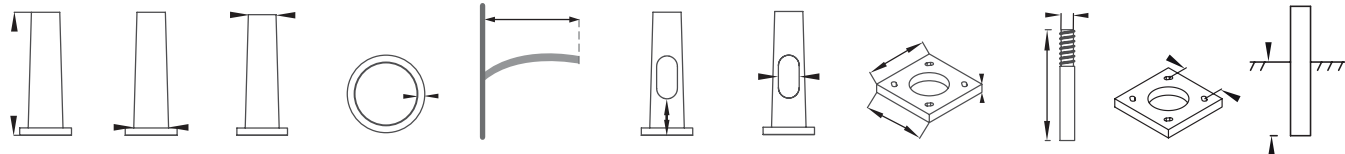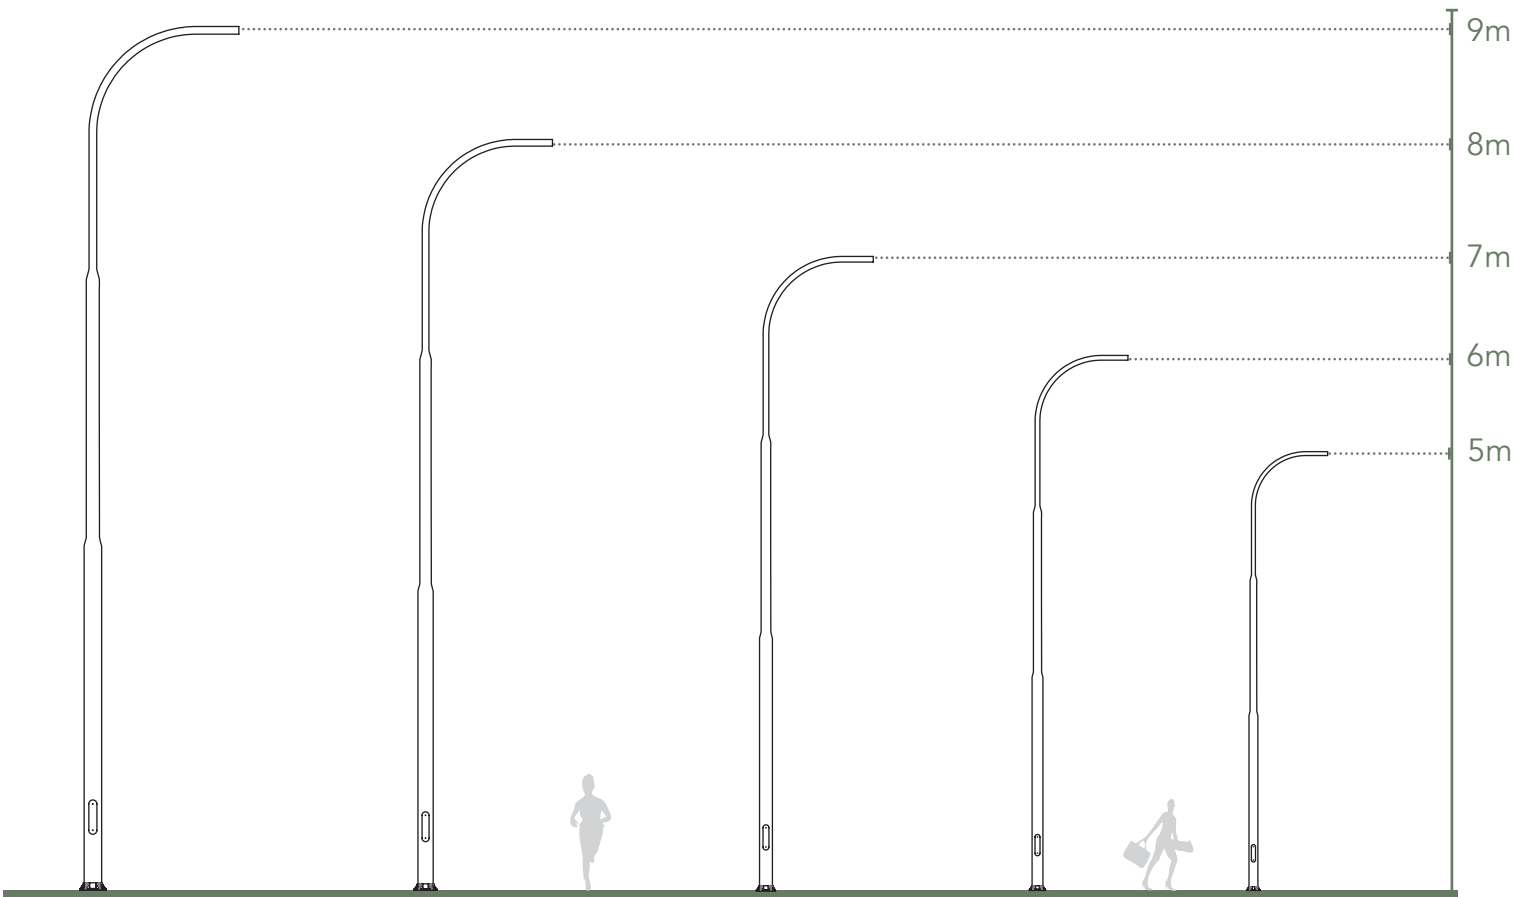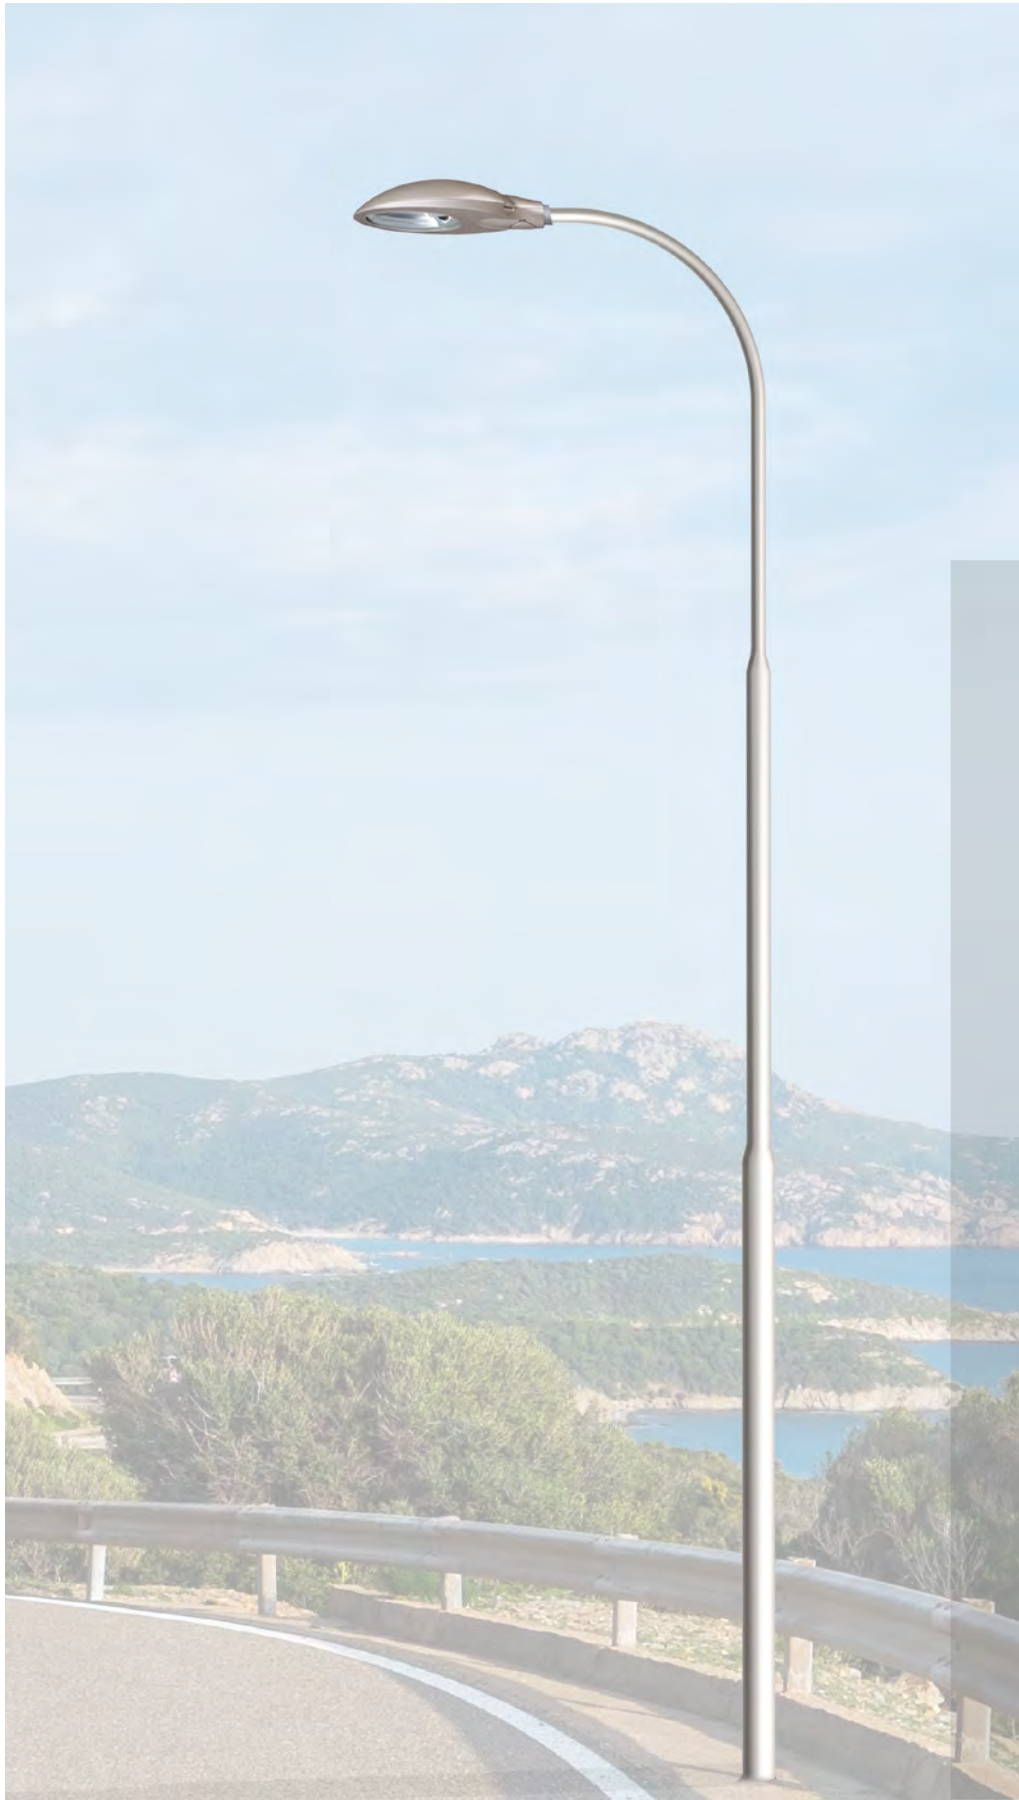



ITEM#	Height (m)	Bottom Dia (mm)	Top Dia (mm)	Wall Thickness (mm)	Arm Length (mm)	Door Position (mm)	Door Size (mm)	Base Plate Size (mm)	Bolt Size (mm)	Bolt Circle (mm)	Embedding (mm)
RIP6035A-H-BS	6≤H≤8	152	89	3.0	800-1000	600	400X95	260X260X90	4XM24	170	1000-1200
RIP6538B-H-BS	7≤H≤9	165	95	3.5				270X270X90		180	1200-1500
RIP7040C-H-BS		178	100	4.0/4.8				290X290X110		190	
RIP8050D-H-BS		203	127	4.8				305X305X90		205	

Catalog Number designates

Shaft Diameter At Base	Shaft Diameter At Top	Wall Thickness	Pole Height	Surface Finish	Accessory
60=6.0"(152mm)	35=3.5"(89mm)	A=3.0mm	6≤H≤10	SB=Satin Brushed AD=Anodized PC=PowderCoating	See Accessories Section
65=6.5"(165mm)	38=3.8"(95mm)	B=3.5mm			
70=7.0"(178mm)	40=4.0"(100mm)	C=4.0mm			
80=8.0"(203mm)	50=5.0"(127mm)	D=4.8mm			



KOLN .

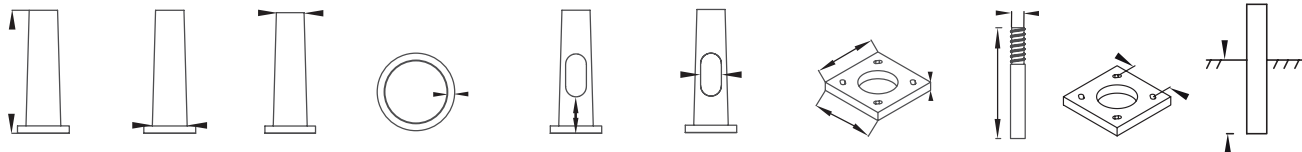
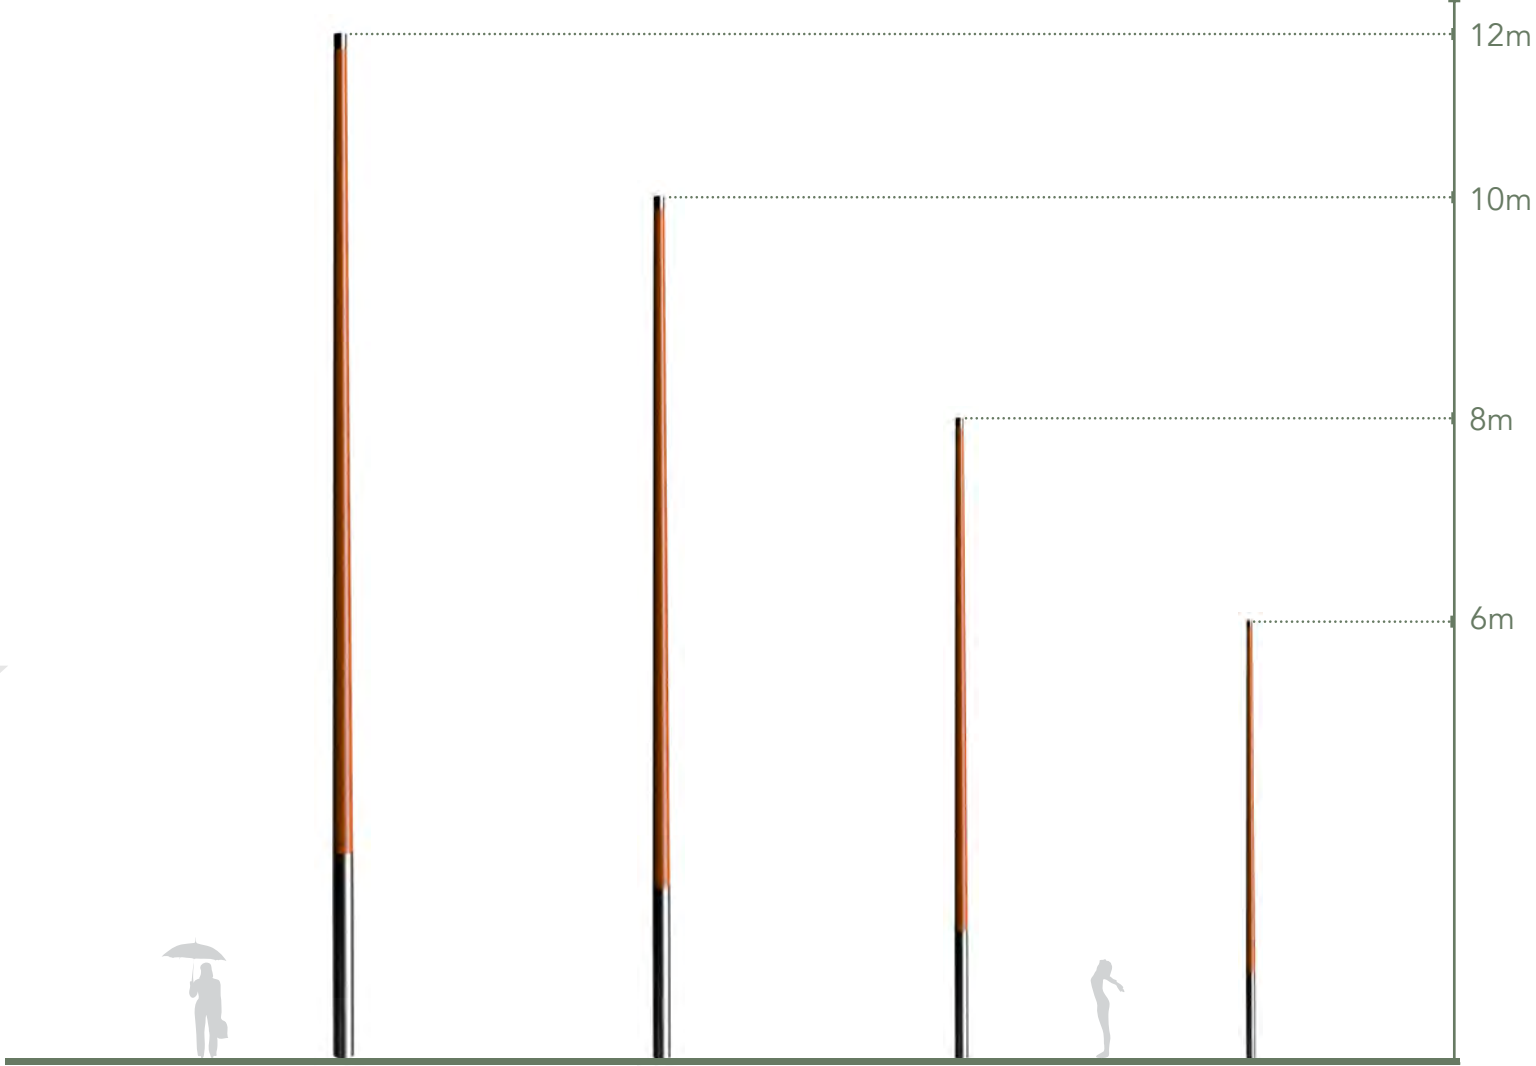


ITEM#	Height (m)	Bottom Dia (mm)	Top Dia (mm)	Wall Thickness (mm)	Door Position (mm)	Door Size (mm)	Base Plate Size (mm)	Bolt Size (mm)	Bolt Circle (mm)	Embedding (mm)
RJP6035A-H-BS	6≤H≤8	152	89	3.0	600	400X95	260X260X90	4XM24	170	1000-1200
RJP6538B-H-BS	7≤H≤9	165	95	3.5			270X270X90		180	1200-1500
RJP7040C-H-BS	8≤H≤10	178	100	4.0/4.8			290X290X110		190	
RJP8050D-H-BS	8≤H≤12	203	127	4.8			305X305X90		205	

Catalog Number designates

Shaft Diameter At Base	Shaft Diameter At Top	Wall Thickness	Pole Hight	Surface Finish	Accessory
60=6.0"(152mm)	35=3.5"(89mm)	A=3.0mm	6≤H≤12	SB=Satin Brushed AD=Anodized PC=PowderCoating	See Accessories Section
65=6.5"(165mm)	38=3.8"(95mm)	B=3.5mm			
70=7.0"(178mm)	40=4.0"(100mm)	C=4.0mm			
80=8.0"(203mm)	50=5.0"(127mm)	D=4.8mm			

ELYSEE .

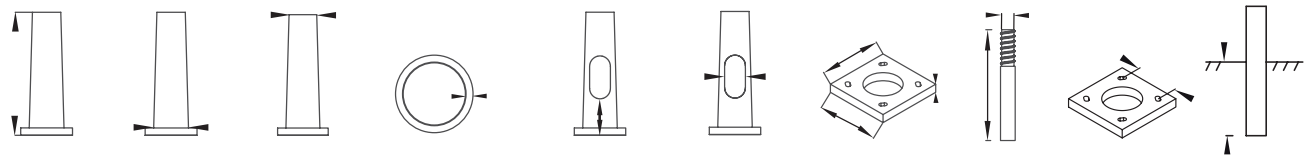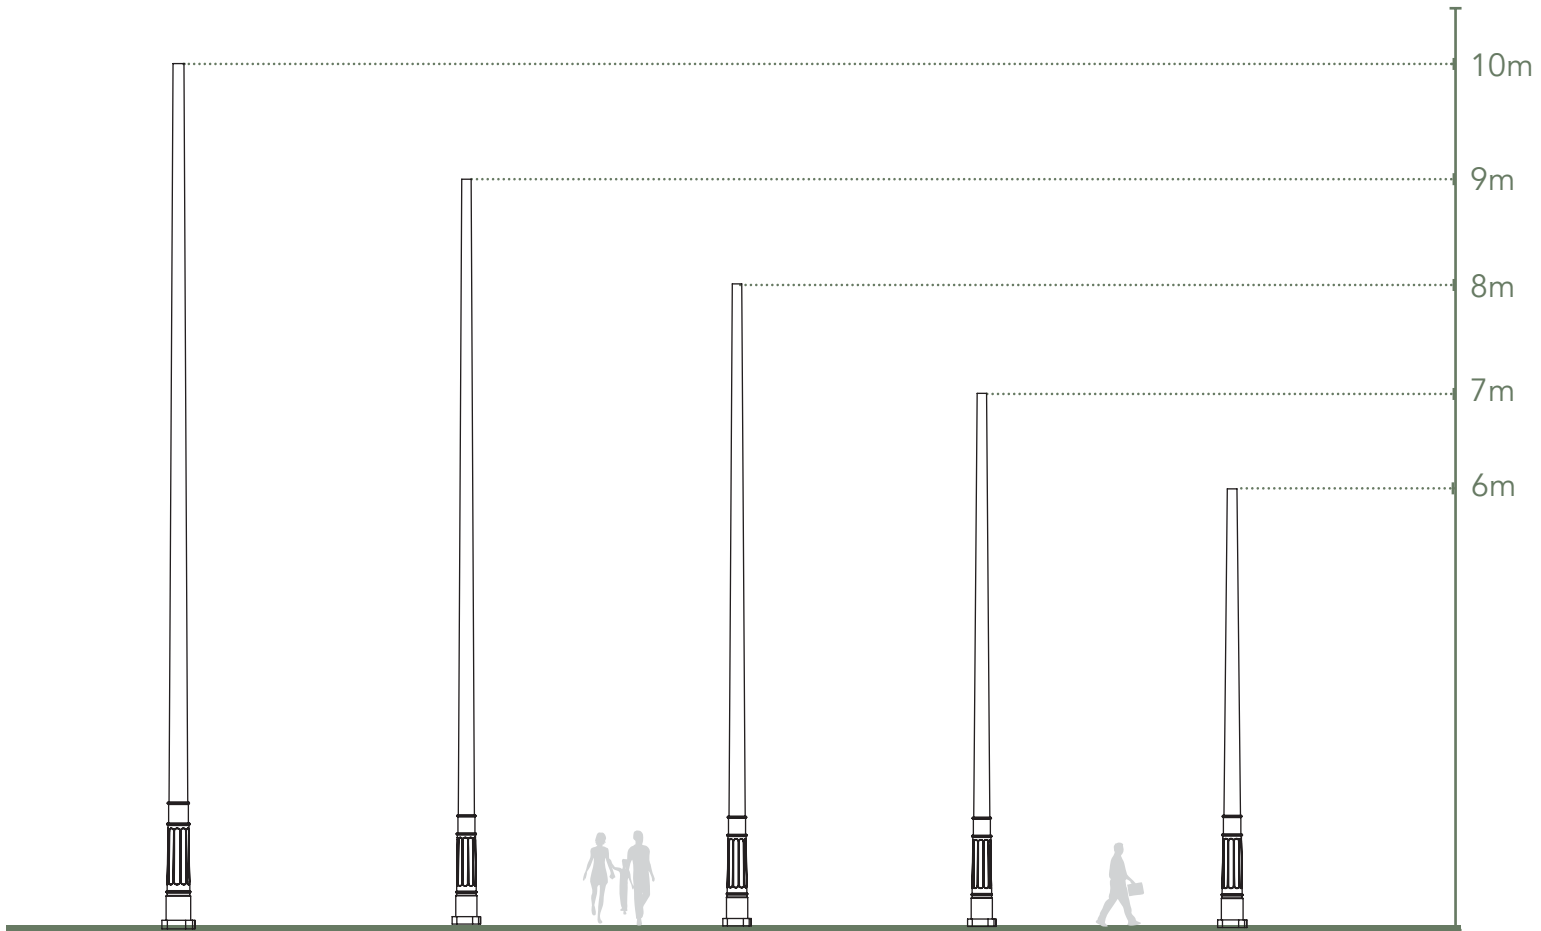

ITEM#	Height (m)	Bottom Dia (mm)	Top Dia (mm)	Wall Thickness (mm)	Door Position (mm)	Door Size (mm)	Base Plate Size (mm)	Bolt Size (mm)	Bolt Circle (mm)	Embedding (mm)
RKP6035A-H-BS	6≤H≤8	152	89	3.0	600	400X95	260X260X90	4XM24	170	1000-1200
RKP6538B-H-BS	7≤H≤9	165	95	3.5			270X270X90		180	1200-1500
RKP7040C-H-BS	8≤H≤10	178	100	4.0/4.8			290X290X110		190	
RKP8050D-H-BS	8≤H≤10	203	127	4.8			305X305X90		205	


Catalog Number designates

Shaft Diameter At Base	Shaft Diameter At Top	Wall Thickness	Pole Hight	Surface Finish	Accessory
60=6.0"(152mm)	35=3.5"(89mm)	A=3.0mm	6≤H≤10	SB=Satin Brushed AD=Anodized PC=Powder Coating	See Accessories Section
65=6.5"(165mm)	38=3.8"(95mm)	B=3.5mm			
70=7.0"(178mm)	40=4.0"(100mm)	C=4.0mm			
80=8.0"(203mm)	50=5.0"(127mm)	D=4.8mm			

LANDSCAPE POLES .



KENT .

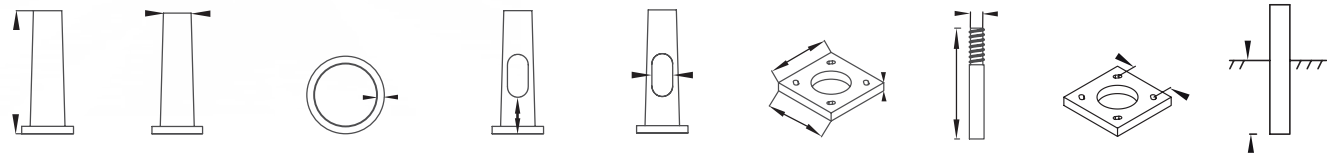


ITEM#	Height (m)	Diameter Dia (mm)	Wall Thickness (mm)	Door Position (mm)	Door Size(mm)	Base Plate Size(mm)	Bolt Size(mm)	Bolt Circle (mm)	Embedding (mm)
SAP55A-H-BS	2.5≤H≤4.0	140	3.0	300	250X95	240X240X16	4XM20	145	800
SAP60A-H-BS		152	3.0			260X260X16		170	
SAP65B-H-BS		165	3.5			260X260X16		180	
SAP70C-H-BS		178	4.0			286X286X16		190	
SAP80D-H-BS		203	4.8			305X305X16		205	

Catalog Number designates

Shaft Diameter	Wall Thickness	Pole Hight	Surface Finish	Accessory
55=5.5"(140mm)	A=3.0mm	2.5≤H≤4	SB=Satin Brushed AD=Anodized PC=PowderCoating	See Accessories Section
60=6.0"(152mm)	B=3.0mm			
65=6.5"(165mm)	C=4.0mm			
70=7.0"(178mm)	D=4.8mm			
80=8.0"(203mm)				

visit our website for all current information and certifications

ABERRANT .

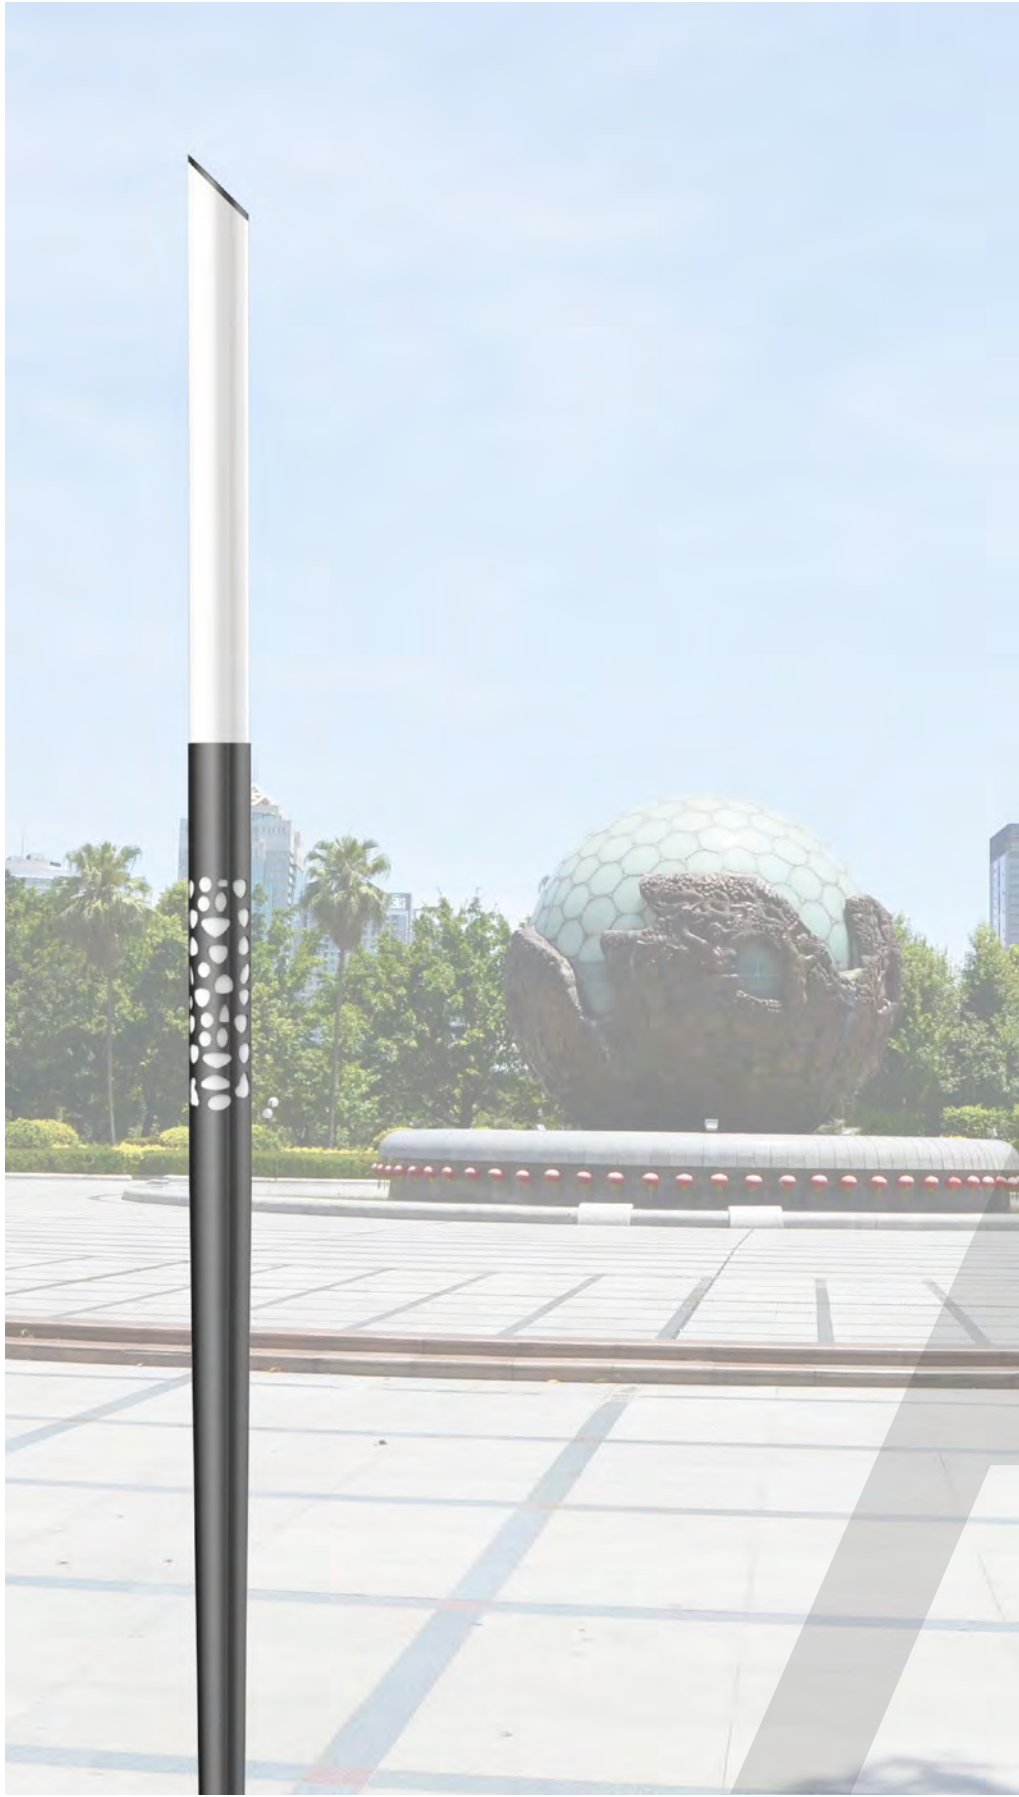


ITEM#	Height (m)	Bottom Dia(mm)	Top Dia(mm)	Wall Thickness (mm)	Door Position (mm)	Door Size(mm)	Base Plate Size(mm)	Bolt Size(mm)	Bolt Circle(mm)	Embedding (mm)
SBP3550A-H-BS	2.5≤H≤4.0	89	127	3.0	600	250X95	250X250X16	4XM18	200	800
SBP3555A-H-BS		89	140	3.0						
SBP4060A-H-BS		100	152	3.0						

Catalog Number designates

Shaft Diameter At Base	Shaft Diameter At Top	Wall Thickness	Pole Hight	Surface Finish	Accessory
35=3.5"(89mm)	50=5.0"(127mm)	A=3.0mm	2.5≤H≤4	SB=Satin Brushed AD=Anodized PC=Powder Coating	See Accessories Section
35=3.5"(89mm)	55=5.5"(140mm)				
40=4.0"(100mm)	60=6.0"(152mm)				

SPANGLE .

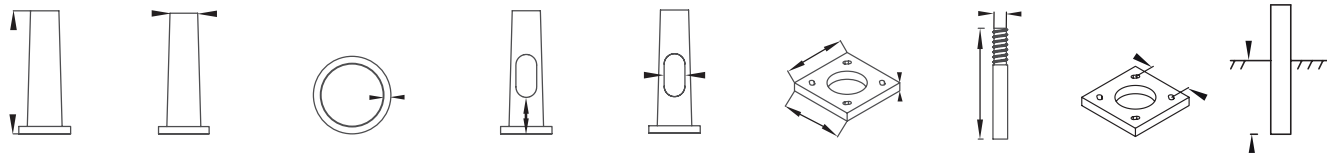

ITEM#	Height (m)	Diameter Dia (mm)	Wall Thickness (mm)	Door Position (mm)	Door Size(mm)	Base Plate Size(mm)	Bolt Size(mm)	Bolt Circle(mm)	Embedding (mm)
SCP55A-H-BS	2.5≤H≤4.0	140	3.0	300	250X95	240X240X16	4XM20	145	800
SCP60A-H-BS		152	3.0			260X260X16		170	
SCP65B-H-BS		165	3.5			260X260X16		180	
SCP70C-H-BS		178	4.0			286X286X16		190	
SCP80D-H-BS		203	4.8			305X305X16		205	


Catalog Number designates

Shaft Diameter	Wall Thickness	Pole Hight	Surface Finish	Accessory
55=5.5"(140mm)	A=3.0mm	2.5≤H≤4.0	SB=Satin Brushed AD=Anodized PC=Powder Coating	See Accessories Section
60=6.0"(152mm)	B=3.5mm			
65=6.5"(165mm)	C=4.0mm			
70=7.0"(178mm)	D=4.8mm			
80=8.0"(203mm)				

visit our website for all current information and certifications



KARMA .

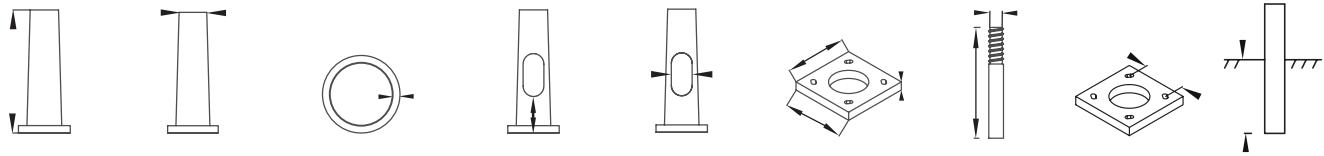

ITEM#	Height (m)	Side Length(mm)	Wall Thickness (mm)	Door Position (mm)	Door Size(mm)	Base Plate Size(mm)	Bolt Size(mm)	Bolt Circle(mm)	Embedding (mm)
SDP55A-H-BS	2.5≤H≤4.0	140	3.0	300	250X95	300X300X12	4XM18	250	800
SDP60A-H-BS		150	3.0				4XM18		
SDP80B-H-BS		200	3.7				4XM20		



Catalog Number designates

Side Length	Wall Thickness	Pole Hight	Surface Finish	Accessory
55=5.5"(140mm)	A=3.0mm	2.5≤H≤4.0	SB=Satin Brushed AD=Anodized PC=Powder Coating	See Accessories Section
60=6.0"(150mm)	B=3.7mm			
80=8.0"(200mm)				

visit our website for all current information and certifications



EITON .

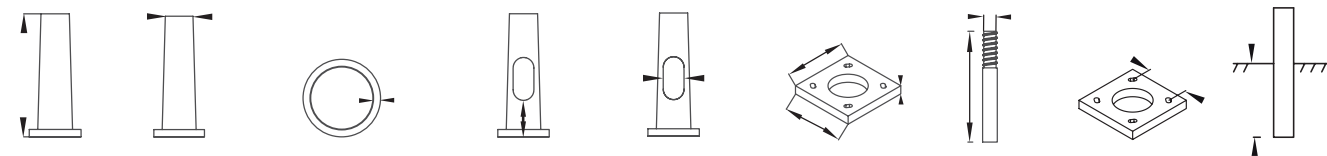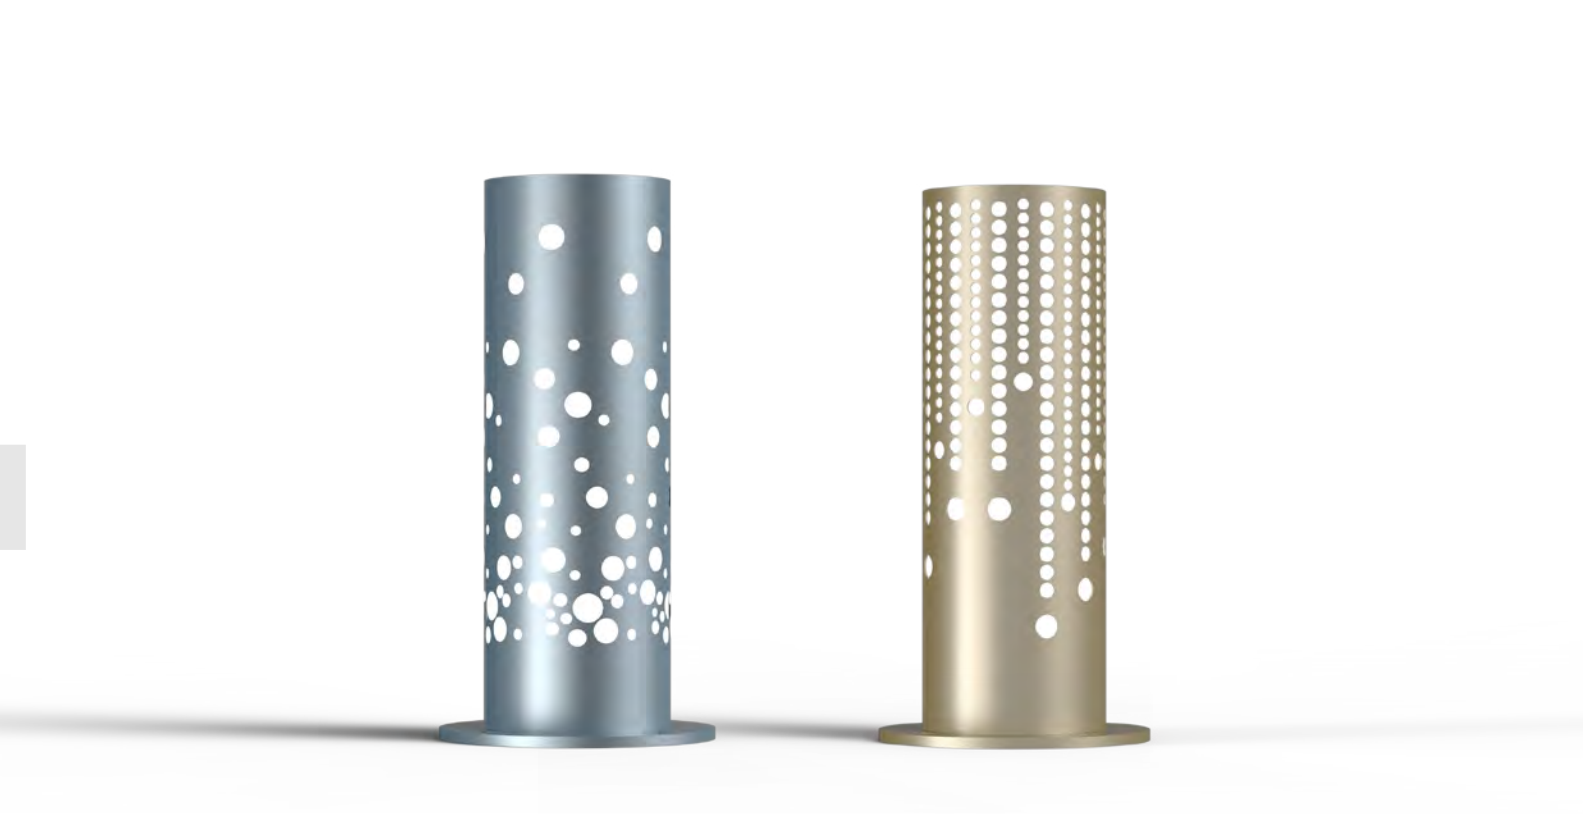




ITEM#	Height (m)	Diameter Dia (mm)	Wall Thickness (mm)	Door Position (mm)	Door Size(mm)	Base Plate Size(mm)	Bolt Size(mm)	Bolt Circle (mm)	Embedding (mm)
SEP55A-H-BS	0.6	140	3.0	/	/	240X240X12	4XM20	145	800
SEP60A-H-BS		152	3.0			260X260X12		170	
SEP65B-H-BS		165	3.5			260X260X12		180	

Catalog Number designates

Shaft Diameter	Wall Thickness	Pole Hight	Surface Finish	Accessory
55=5.5"(140mm)	A=3.0mm	2.5≤H≤4.0	SB=Satin Brushed AD=Anodized PC=Powder Coating	See Accessories Section
60=6.0"(152mm)	B=3.5mm			
65=6.5"(165mm)	/			

TRAFFIC POLES .

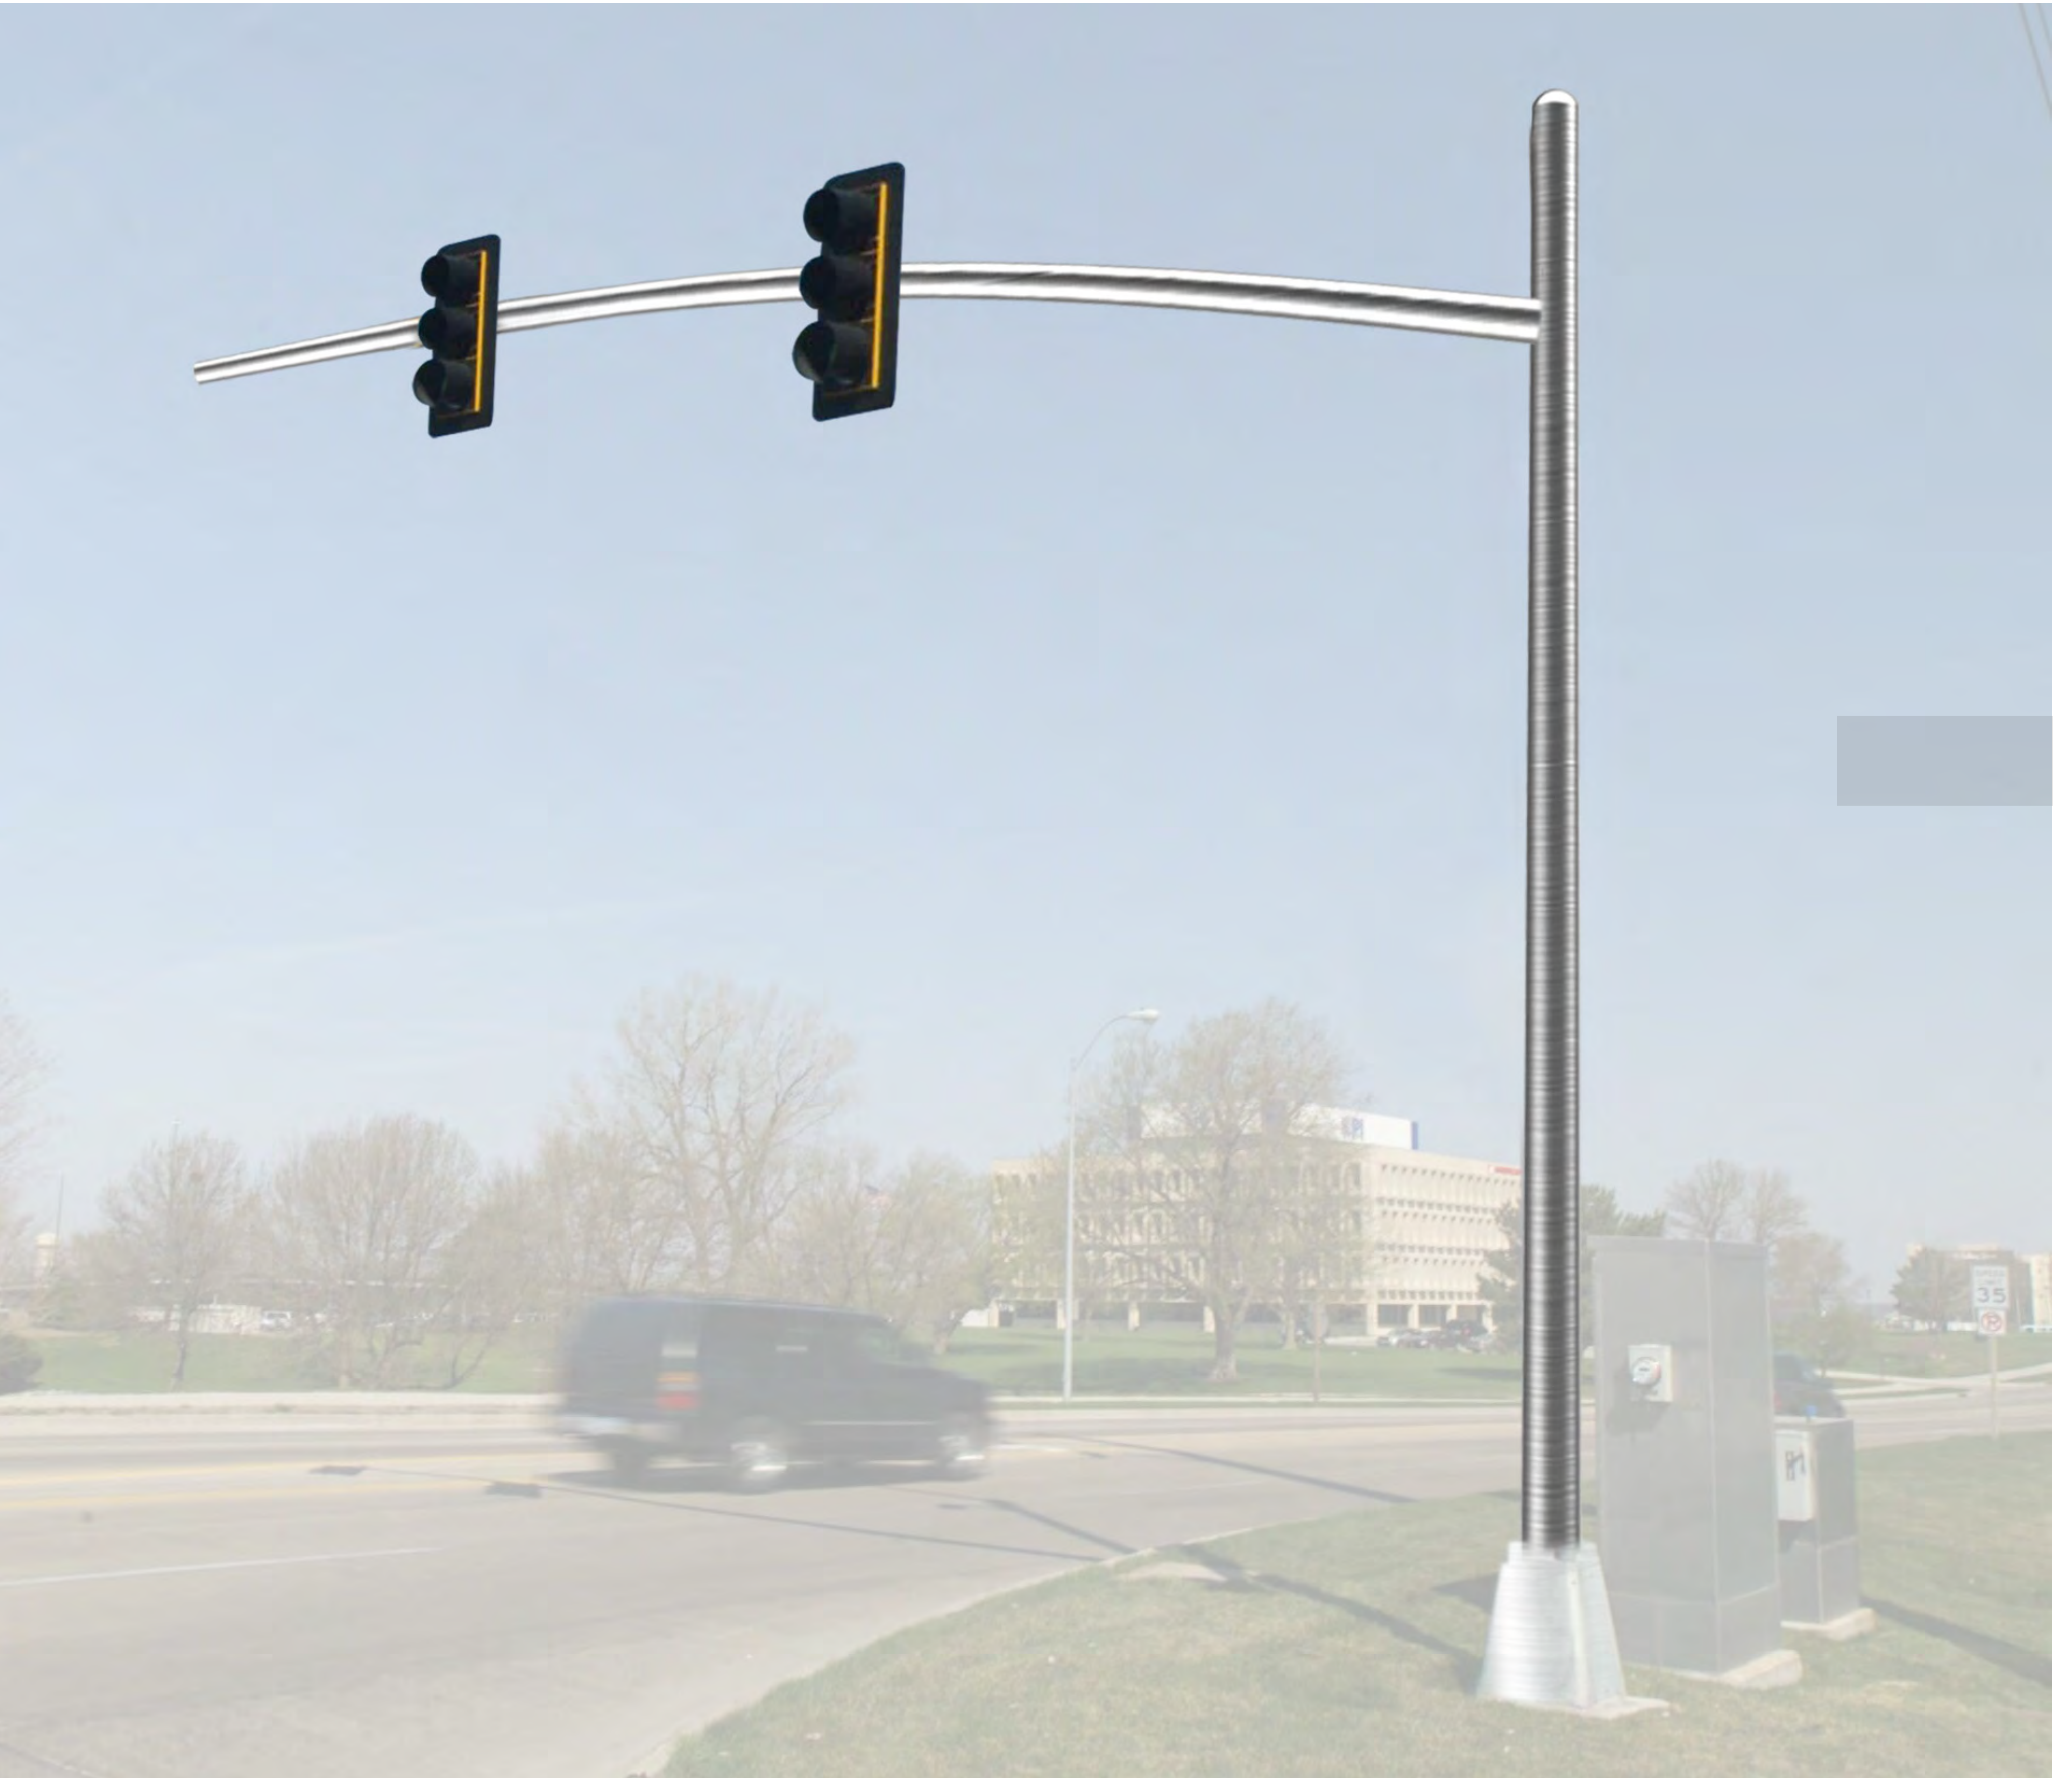


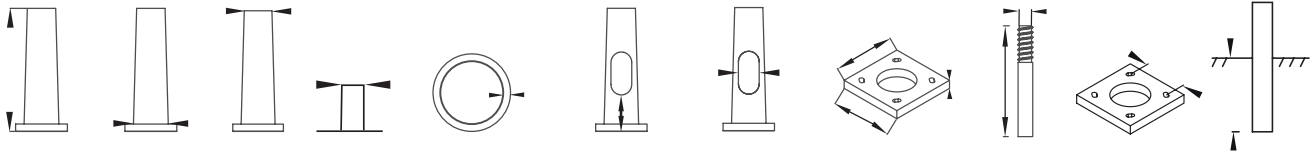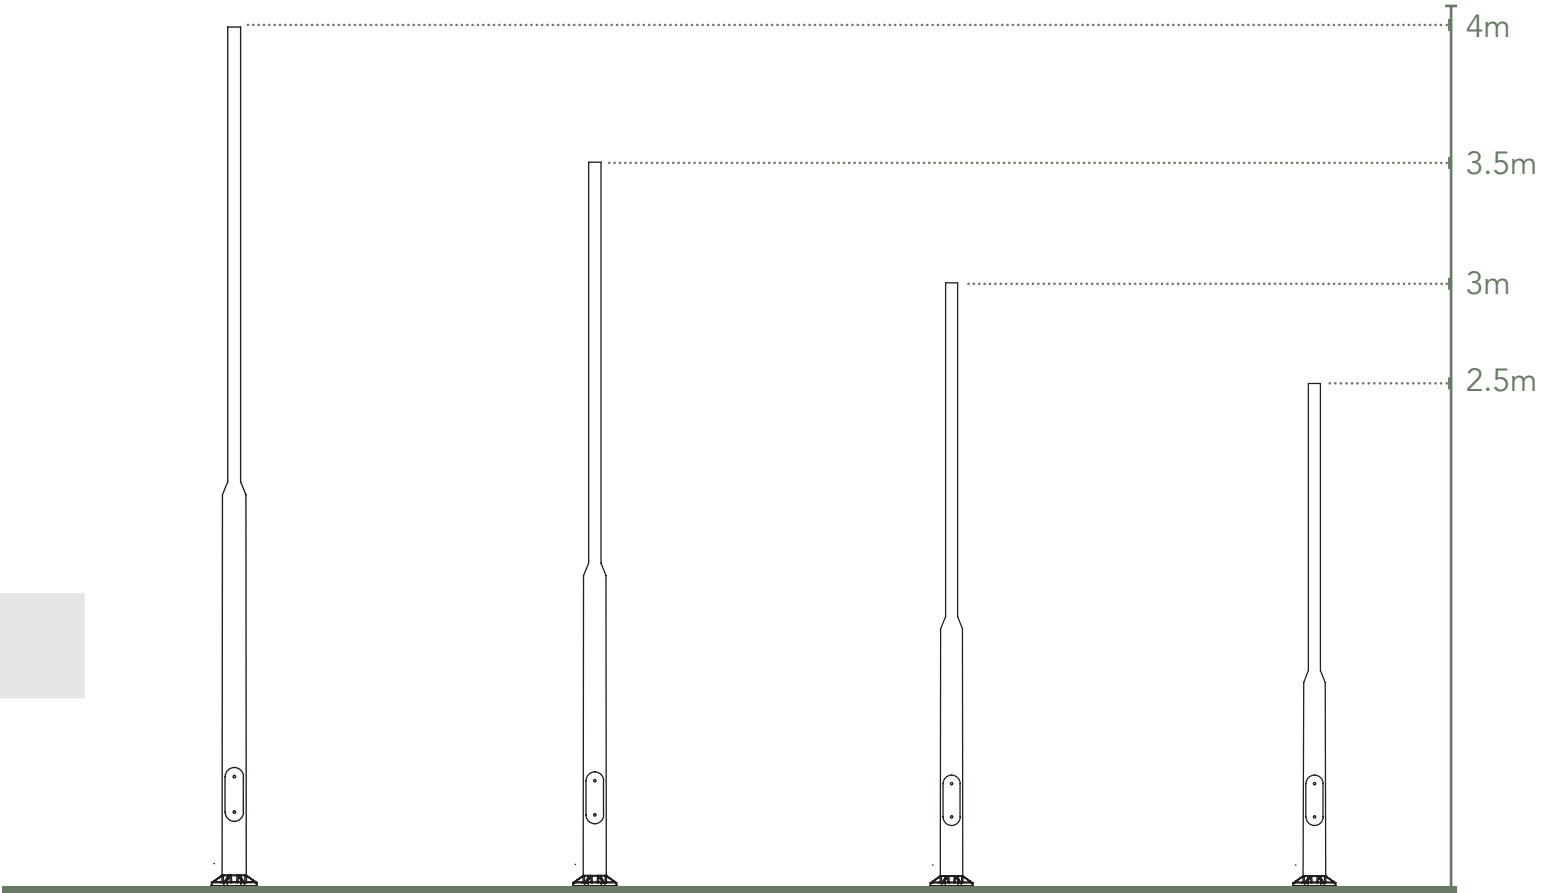

ITEM#	Height (m)	Bottom Dia (mm)	Top Dia (mm)	Tenon (mm)	Wall Thickness (mm)	Door Position (mm)	Door Size (mm)	Base Plate Size (mm)	Bolt Size (mm)	Bolt Circle (mm)	Embedding (mm)
TAP5030A-H-BS	2.5≤H≤4.0	127	76	/	3.0	300	250X95	230X230X55	4XM18	135	800
TAP5535A-H-BS		140	89					240X240X75	4XM18	145	
TAP6040A-H-BS		152	100					260X260X90	4XM20	170	

Catalog Number designates



Shaft Diameter At Base	Shaft Diameter At Top	Wall Thickness	Pole Hight	Surface Finish	Accessory
50=5.0"(127mm)	30=3.0"(76mm)	A=3.0mm	2.5≤H≤4	SB=Satin Brushed AD=Anodized PC=Powder Coating	See Accessories Section
55=5.5"(140mm)	35=3.5"(89mm)				
60=6.0"(152mm)	40=4.0"(100mm)				

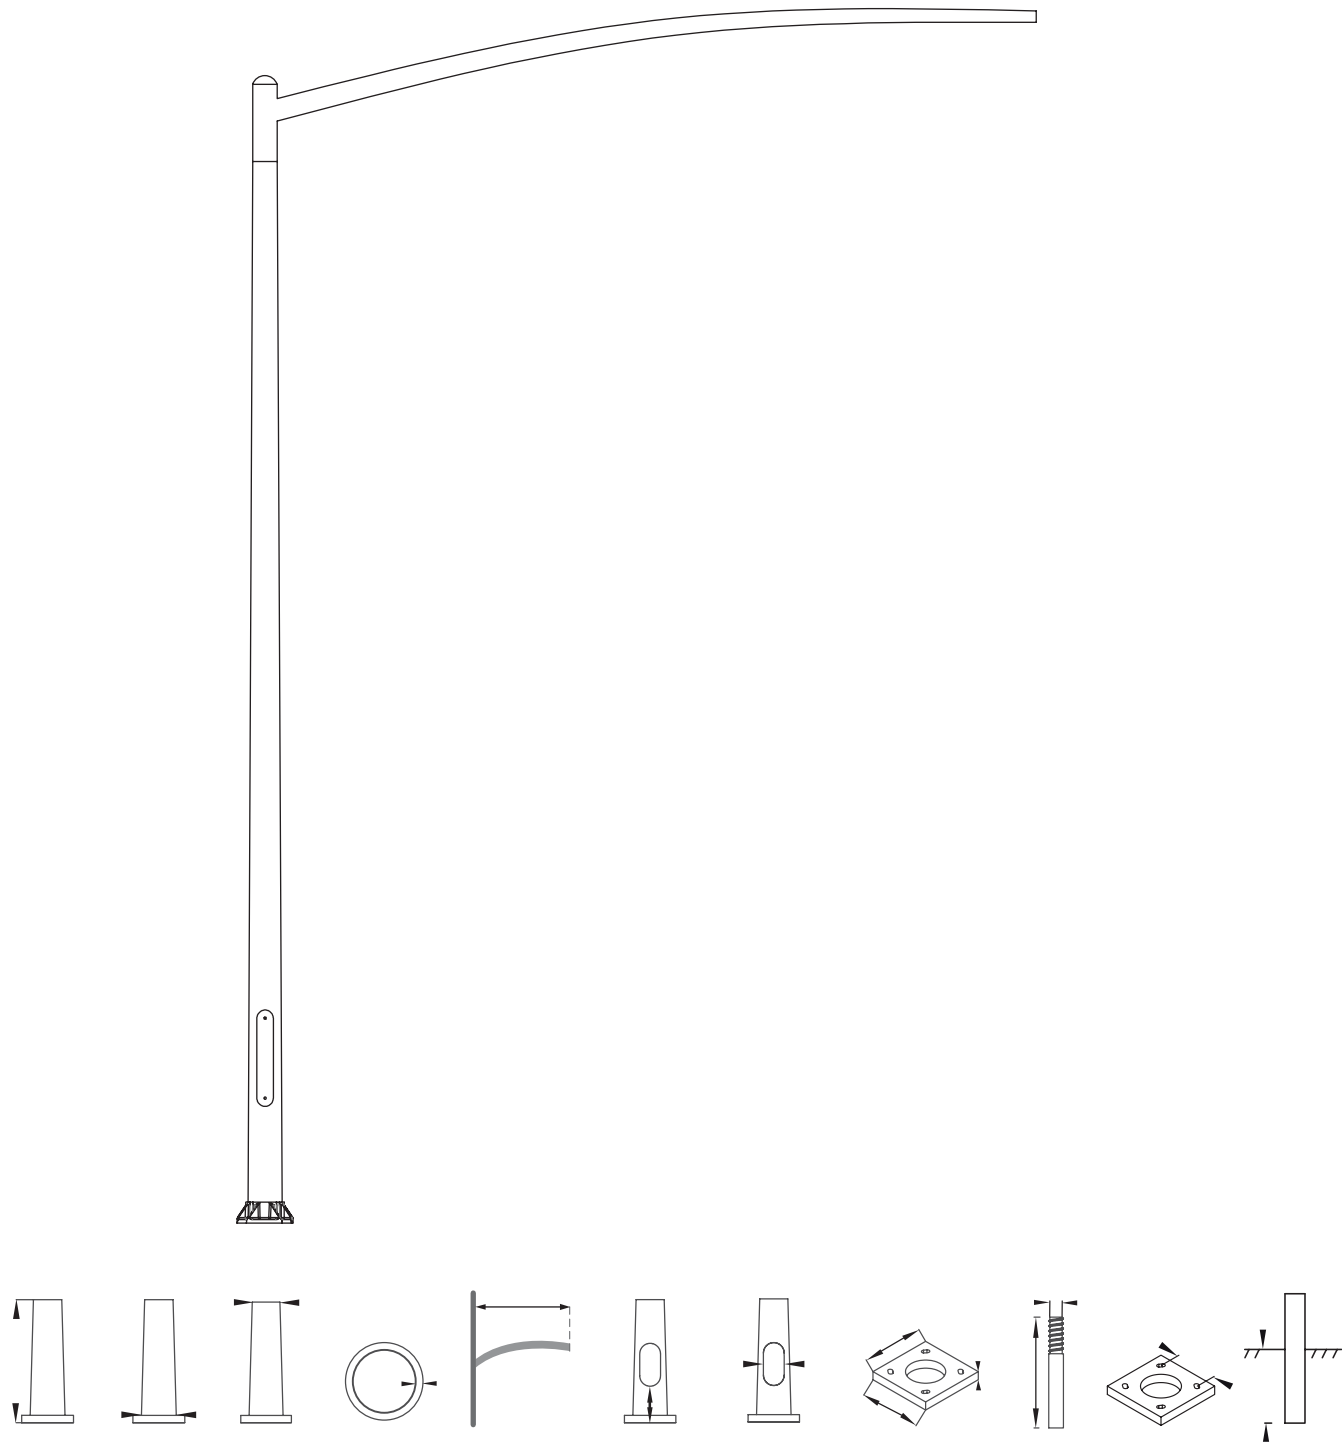

ITEM#	Height (m)	Bottom Dia (mm)	Top Dia (mm)	Wall Thickness (mm)	Arm Length (mm)	Door Position (mm)	Door Size (mm)	Base Plate Size (mm)	Bolt Size (mm)	Bolt Circle (mm)	Embedding (mm)
TBP6035A-H-BS	4≤H≤6	152	89	3.0	3000- 6000	600	400X95	260X260X90	4XM24	170	1000-1200
TBP6538B-H-BS	4≤H≤6	165	95	3.5				270X270X90		180	1200-1500
TBP7040C-H-BS	4≤H≤6	178	100	4.0				290X290X110		190	

Catalog Number designates

Shaft Diameter At Base	Shaft Diameter At Top	Wall Thickness	Pole Hight	Surface Finish	Accessory
60=6.0"(152mm)	35=3.5"(89mm)	A=3.0mm	4≤H≤6	SB=Satin Brushed AD=Anodized PC=Powder Coating	See Accessories Section
65=6.5"(165mm)	38=3.8"(95mm)	B=3.5mm			
70=7.0"(178mm)	40=4.0"(100mm)	C=4.0mm			

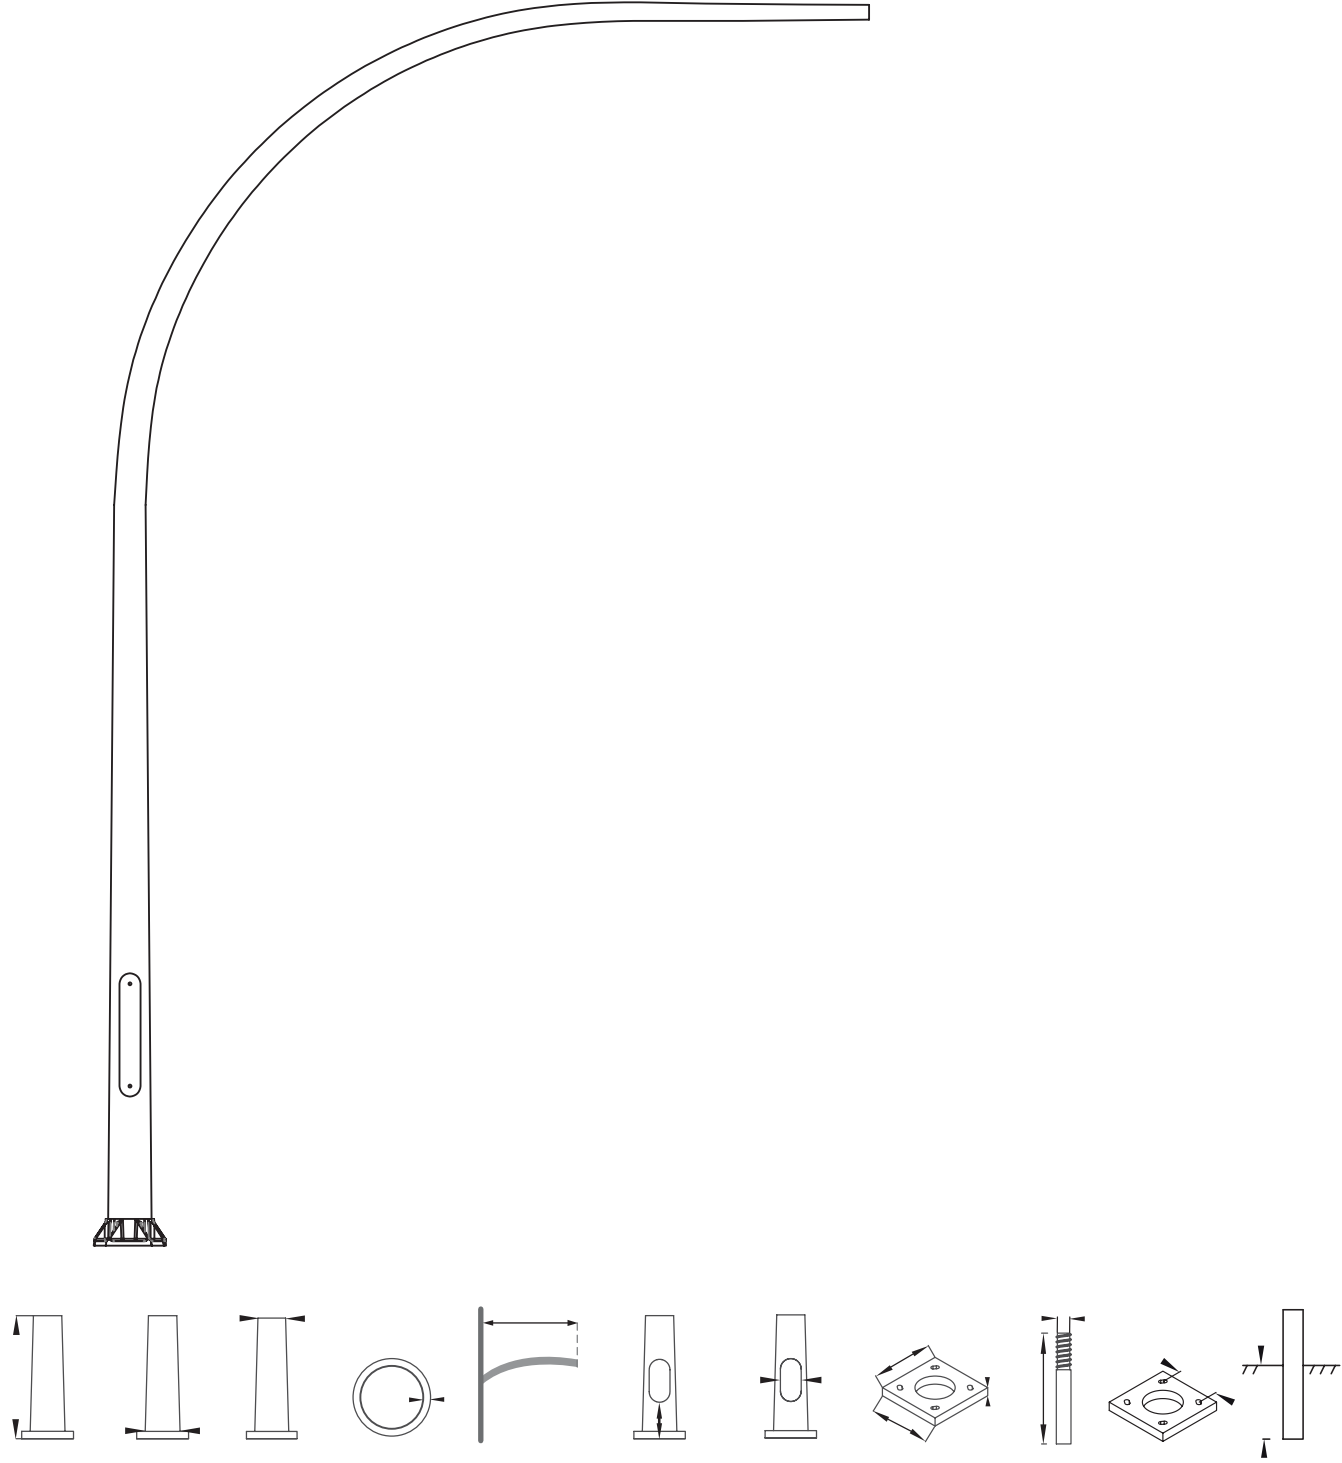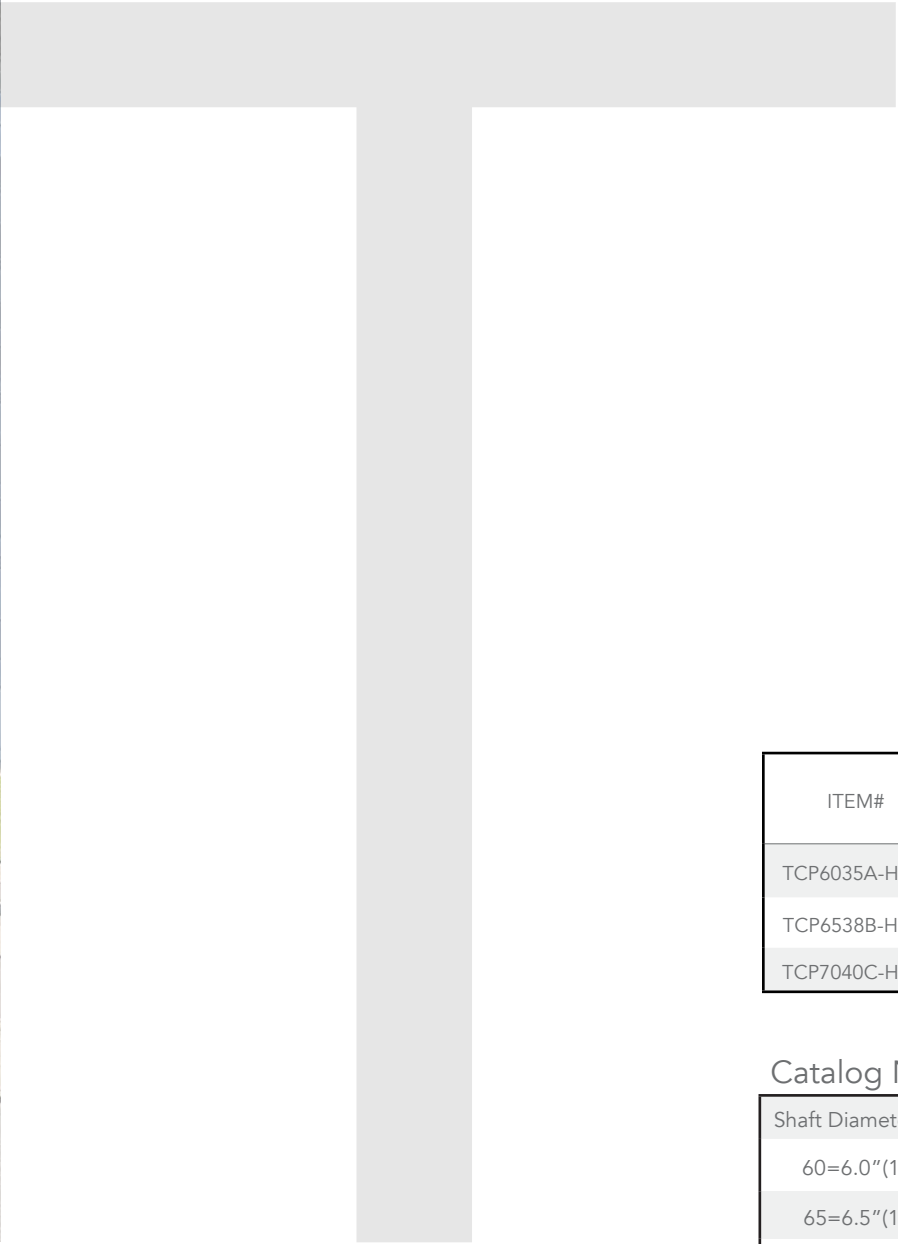


ITEM#	Height (m)	Bottom Dia(mm)	Top Dia (mm)	Wall Thickness (mm)	Arm Length (mm)	Door Position (mm)	Door Size (mm)	Base Plate Size (mm)	Bolt Size (mm)	Bolt Circle (mm)	Embedding (mm)
TCP6035A-H-BS	3≤H≤5	152	89	3.0	1000-3000	600	400X95	260X260X90	4XM24	170	1000-1200
TCP6538B-H-BS	3≤H≤5	165	95	3.5				270X270X90		180	1200-1500
TCP7040C-H-BS	3≤H≤5	178	100	4.0				290X290X110		190	




Catalog Number designates

Shaft Diameter At Base	Shaft Diameter At Top	Wall Thickness	Pole Hight	Surface Finish	Accessory
60=6.0"(152mm)	35=3.5"(89mm)	A=3.0mm	3≤H≤5	SB=Satin Brushed AD=Anodized PC=Powder Coating	See Accessories Section
65=6.5"(165mm)	38=3.8"(95mm)	B=3.5mm			
70=7.0"(178mm)	40=4.0"(100mm)	C=4.0mm			

FLAG POLES .



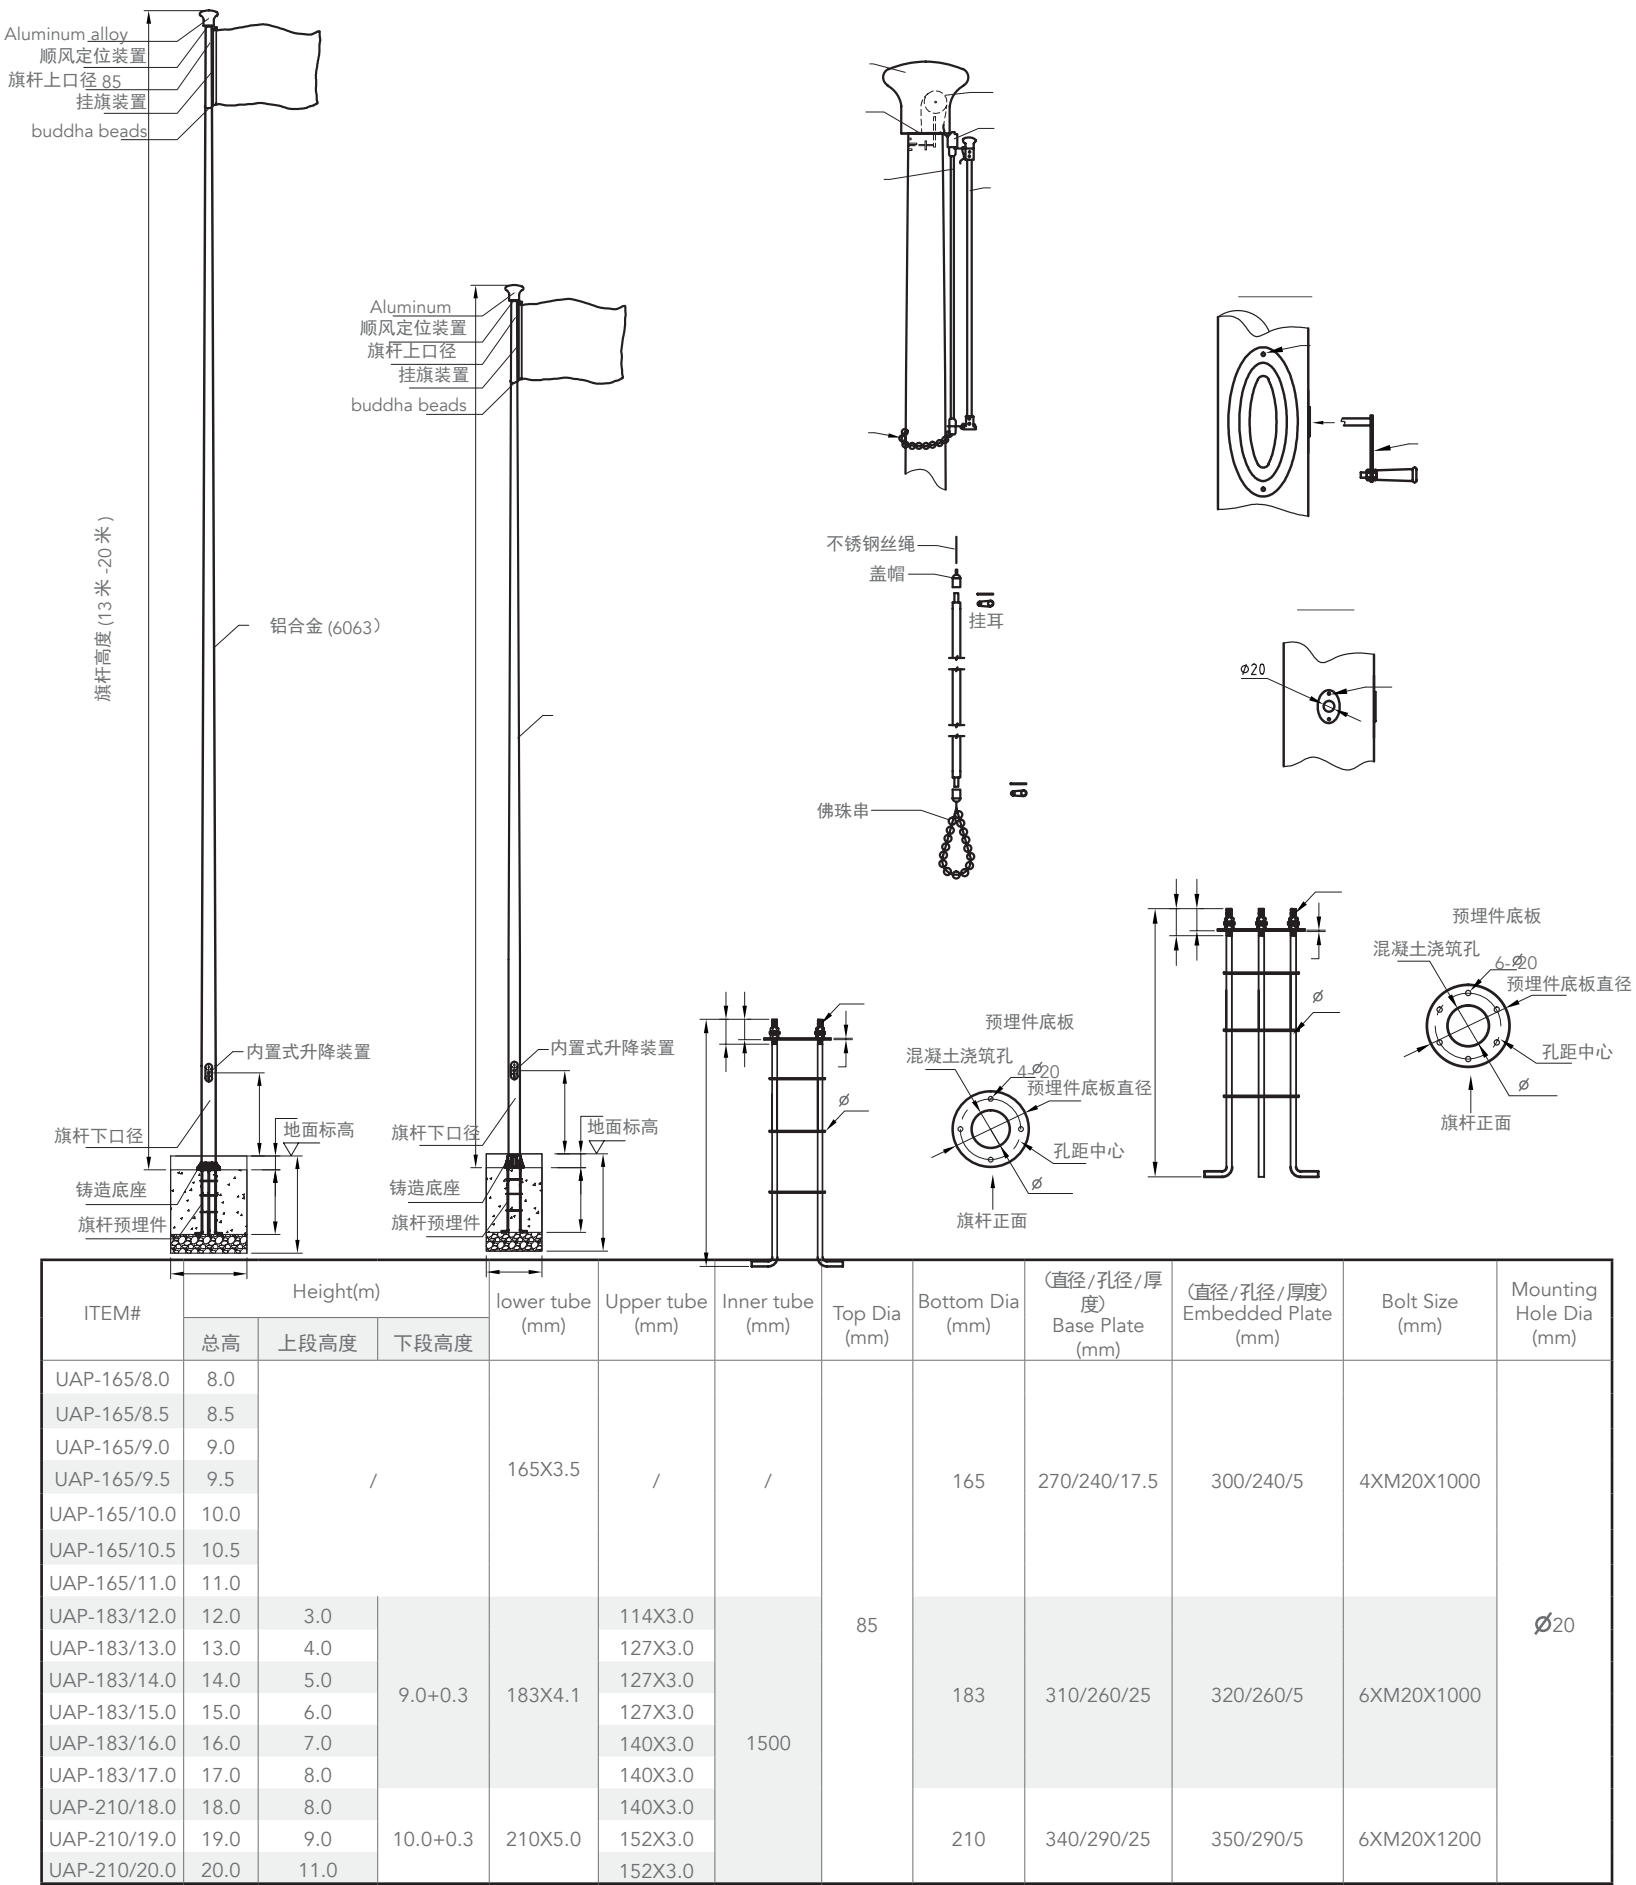


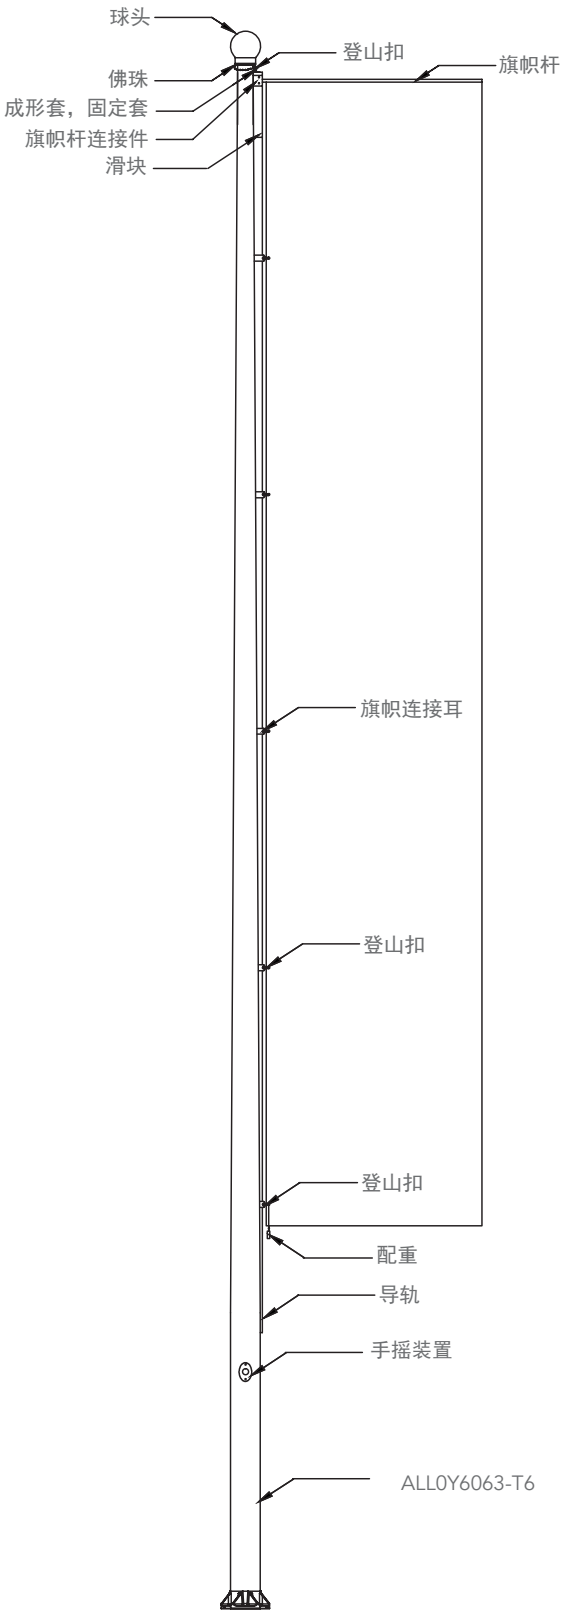


BASE PLATE
ALLOY6063-T6
SCALE: 1:10

ITEM#	Height (m)	Bottom Dia (mm)	Top Dia (mm)	Wall Thickness (mm)	Base Plate Size (mm)	Bolt Size (mm)	Bolt Circle (mm)
UBP-152/6.0	6.0	152	89	3.2	260X260X90	4XM20X1000	170
UBP-152/7.0	7.0						
UBP-152/8.0	8.0						

POLE ACCESSORIES . POLE ANCHOR BOLTS

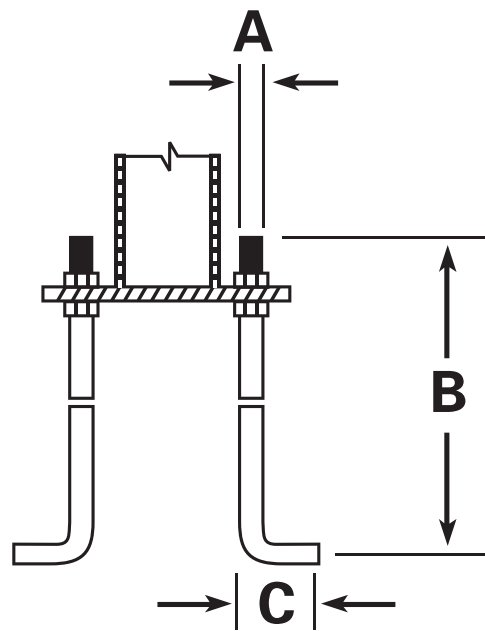

		A	B	C		
ORDER CODE	ITEM#	PSI	Height	Thickness/Thread	Return ("L" Part)	Weight (lbs)
AB160061	1/2"X15"X3"	36,000	15"	1/2"-13NC	3"	1
AB160062	3/4"X17"X3"	36,000	17"	3/4"-10NC	3"	2.6
AB160063	1"X30"X4"	36,000	30"	1"-8NC	4"	8
AB160064	1"X36"X4"	36,000	36"	1"-8NC	4"	9
AB160065	1-1/4"X48"X4"	36,000	48"	1-1/4"-7NC	4"	19
AB160066	1/2"X15"X3"	55,000	15"	1/2"-13NC	3"	1
AB160067	3/4"X17"X3"	55,000	17"	3/4"-10NC	3"	2.6
AB160068	1"X30"X4"	55,000	30"	1"-8NC	4"	8
AB160069	1"X36"X4"	55,000	36"	1"-8NC	4"	9
AB160070	1-1/4"X42"X4"	55,000	42"	1-1/4"-7NC	4"	19

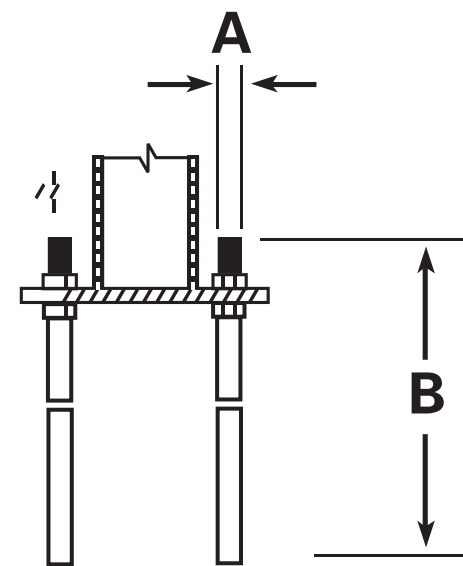

		A	B		
ORDER CODE	ITEM#	PSI	Height	Weight (lbs)	
BB160061	M18X1000	36,000	800/1000/1200	6	
BB160062	M20X1000	36,000	800/1000/1200	7	
BB160063	M24X1000	36,000	800/1000/1200	8	

POLE ACCESSORIES . ALUMINUM POLE BASES



ITEM#	Butt Diameter	Bolt Circle	Required Anchor Bolt Size	Units/Master	Weight/Master	CUF Master
AB4-6.75-0.75	4"	6.75"	0.75X17X3"	10	42	2
AB5-7.75-0.75	5"	7.75"	0.75X17X3"	10	48	2.5




ITEM#	Butt Diameter	Bolt Circle	Required Anchor Bolt Size	Units/Master	Weight/Master	CUF Master
AB4-7-0.75	4"	7"	0.75X17X3"	10	35	2
AB5-7.5-0.75	5"	7.5"	0.75X17X3"	10	37	2.5



ITEM#	Butt Diameter	Bolt Circle	Required Anchor Bolt Size	Units/Master	Weight/Master	CUF Master
AB6-9-10-1	6"	9"-10"	1"X36X4	8	47	2.3
AB7-10-11-1	7"	10"-11"	1"X36X4	5	47	2.1




ITEM#	Butt Diameter	Bolt Circle	Required Anchor Bolt Size	Units/Master	Weight/Master	CUF Master
AB6.5-10-11-1	6.5"	10"	1"X36X4/M24X1000	6	47	2.2



ITEM#	Butt Diameter	Bolt Circle	Required Anchor Bolt Size	Units/Master	Weight/Master	CUF Master
AB8-11-12-1	8"	11"-12"	1"X36X4	5	47	2.5
AB10-13-15-1	10"	13"-15"	1"X36X4	4	52	3



ITEM#	Butt Diameter	Bolt Circle	Required Anchor Bolt Size	Units/Master	Weight/Master	CUF Master
AB8-11-14-1	8"	11"-14"	1"X36X4	4	48	3



ITEM#	Butt Diameter	Bolt Circle	Required Anchor Bolt Size	Units/Master	Weight/Master	CUF Master
AB6.5-10-11-2	6.5"	10"	1"X36X4/M20X1000	6	47	2.2
AB183	7.5"	10.23"	1"X36X4/M20X1000	5	47	2.4
AB210	8.5"	11.4"	1"X36X4/M20X1000	4	48	3



READY TO EXPAND?

LET US HELP YOU WITH YOUR NEXT PRODUCT LINE.

Want to learn more?

For additional IES files and lighting specification sheets, please visit www.thefixtsgroup.com

visit our website for all current information and certifications



USA OFFICE:

2500 Summer St. Houston TX
77007. B.3.3117

3500 NW Boca Raton Blvd Ste 717 Boca
Raton, FL 33431

connect@thefixtsgroup.com | 832.409.6262



THE FIXTS GROUP®
Energy & Industrial Solutions

